



# SPEC ACCEL™ ACC Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**NVIDIA Tesla V100S-PCIE-32GB**  
**ThinkSystem SR665**

SPECaccel\_acc\_peak = Not Run

SPECaccel\_acc\_base = 14.4

ACCEL license: 28


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Apr-2020

Hardware Availability: Jun-2020

Software Availability: Jun-2020

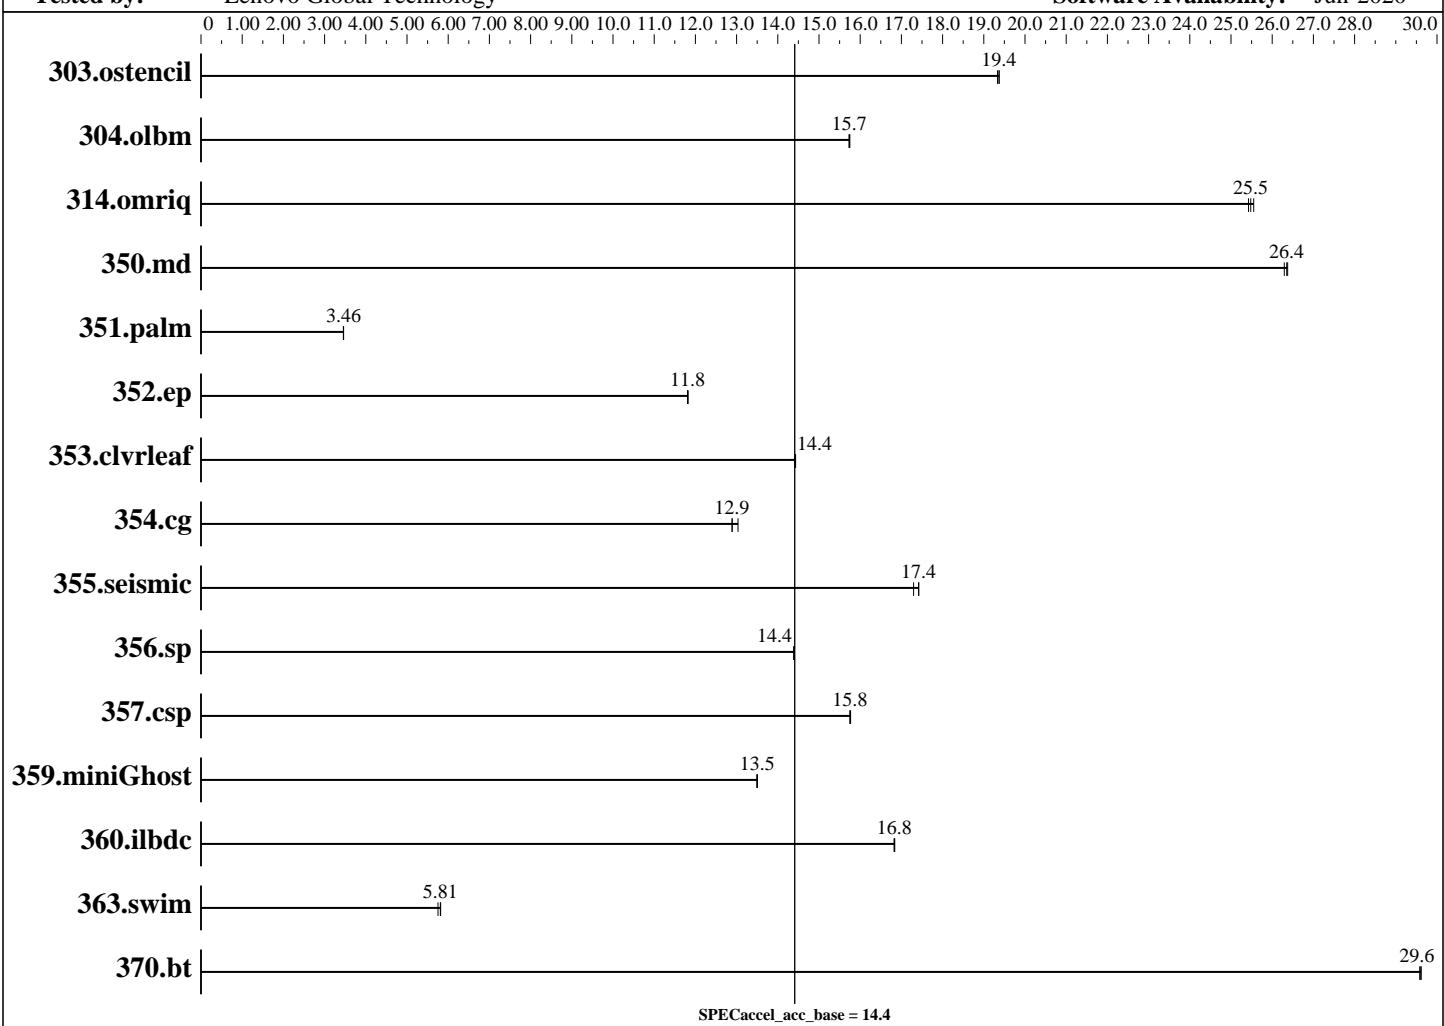

## Hardware

CPU Name: AMD EPYC 7H12  
CPU Characteristics: Turbo up to 3.3 GHz  
CPU MHz: 2600  
CPU MHz Maximum: 3300  
FPU: Integrated  
CPU(s) enabled: 128 cores, 2 chips, 64 cores/chip, 2 threads/core  
CPU(s) orderable: 1-2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 512 KB I+D on chip per core  
L3 Cache: 256 MB I+D on chip per chip  
Other Cache: None

## Accelerator

Accel Model Name: NVIDIA Tesla V100S  
Accel Vendor: NVIDIA Corporation  
Accel Name: NVIDIA Tesla V100S-PCIE-32GB  
Type of Accel: GPU  
Accel Connection: PCIe 3.0 16x  
Does Accel Use ECC: Yes  
Accel Description: NVIDIA Tesla V100S-PCIE-32GB  
Accel Driver: NVIDIA UNIX x86\_64 Kernel Module 418.39

Continued on next page



# SPEC ACCEL ACC Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**NVIDIA Tesla V100S-PCIE-32GB**  
**ThinkSystem SR665**

SPECaccel\_acc\_peak = Not Run

SPECaccel\_acc\_base = 14.4

ACCEL license: 28

Test date: Apr-2020

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Jun-2020

## Hardware (Continued)

Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
 Disk Subsystem: 1 x 480 GB 2.5" SSD  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 15 SP1  
 4.12.14-195-default  
 Compiler: PGI Professional Edition, Release 19.9  
 File System: btrfs  
 System State: Run level 3  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
303.ostencil	7.49	19.4	7.50	19.3	<b>7.49</b>	<b>19.4</b>						
304.olbm	28.9	15.7	28.9	15.7	<b>28.9</b>	<b>15.7</b>						
314.omriq	37.4	25.6	37.6	25.4	<b>37.5</b>	<b>25.5</b>						
350.md	9.55	26.4	<b>9.56</b>	<b>26.4</b>	9.58	26.3						
351.palm	<b>107</b>	<b>3.46</b>	107	3.46	107	3.46						
352.ep	44.8	11.8	44.9	11.8	<b>44.9</b>	<b>11.8</b>						
353.clvrlleaf	30.9	14.4	<b>30.8</b>	<b>14.4</b>	30.8	14.4						
354.cg	<b>31.6</b>	<b>12.9</b>	31.3	13.0	31.6	12.9						
355.seismic	21.2	17.4	21.4	17.3	<b>21.2</b>	<b>17.4</b>						
356.sp	19.2	14.4	<b>19.2</b>	<b>14.4</b>	19.2	14.4						
357.csp	<b>17.1</b>	<b>15.8</b>	17.1	15.8	17.1	15.8						
359.miniGhost	27.3	13.5	27.3	13.5	<b>27.3</b>	<b>13.5</b>						
360.ilbdc	21.8	16.8	<b>21.8</b>	<b>16.8</b>	21.8	16.8						
363.swim	40.0	5.75	<b>39.6</b>	<b>5.81</b>	39.5	5.82						
370.bt	7.53	29.6	7.54	29.6	<b>7.53</b>	<b>29.6</b>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

```
Sysinfo program /home/ACCEL1.3/Docs/sysinfo
$Rev: 6965 $ $Date::: 2015-04-21 #$
running on linux-x8nq Wed Apr 15 13:10:00 2020
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/accel/Docs/config.html#sysinfo>

Continued on next page



# SPEC ACCEL ACC Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla V100S-PCIE-32GB  
ThinkSystem SR665

SPECaccel\_acc\_peak = Not Run

SPECaccel\_acc\_base = 14.4

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Apr-2020

Hardware Availability: Jun-2020

Software Availability: Jun-2020

## Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : AMD EPYC 7H12 64-Core Processor
        2 "physical id"s (chips)
        128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 64
    siblings : 64
    physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
    22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46
    47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
    physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
    22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46
    47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
    cache size : 512 KB
```

```
From /proc/meminfo
    MemTotal:       1056689296 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="SLES"
    VERSION="15-SP1"
    VERSION_ID="15.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
    ID="sles"
    ID_LIKE="suse"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-x8nq 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019
(8fba516) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 15 12:46
```

```
SPEC is set to: /home/ACCEL1.3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4      btrfs  444G  160G  284G  37% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC ACCEL ACC Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla V100S-PCIE-32GB  
ThinkSystem SR665

SPECaccel\_acc\_peak = Not Run

SPECaccel\_acc\_base = 14.4

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Apr-2020

Hardware Availability: Jun-2020

Software Availability: Jun-2020

## Platform Notes (Continued)

BIOS Lenovo D8E105F-1.00 03/19/2020

Memory:

16x Samsung M393A8G40AB2-CWE 64 kB 2 rank 3200 MT/s  
16x Unknown Unknown

(End of data from sysinfo program)

## Base Compiler Invocation

C benchmarks:

pgcc

Fortran benchmarks:

pgfortran

Benchmarks using both Fortran and C:

pgcc pgfortran

## Base Optimization Flags

C benchmarks:

-fast -Mfprelaxed -acc -ta=tesla:cc70 -ta=tesla:cuda10.1

Fortran benchmarks:

-fast -Mfprelaxed -acc -ta=tesla:cc70 -ta=tesla:cuda10.1

Benchmarks using both Fortran and C:

353.clvleaf: -fast -Mfprelaxed -acc -ta=tesla:cc70 -ta=tesla:cuda10.1

359.miniGhost: -fast -Mfprelaxed -acc -ta=tesla:cc70 -ta=tesla:cuda10.1  
-Mnomain

The flags file that was used to format this result can be browsed at

[https://www.spec.org/accel/flags/pgi\\_flags.20200506.html](https://www.spec.org/accel/flags/pgi_flags.20200506.html)

You can also download the XML flags source by saving the following link:

[https://www.spec.org/accel/flags/pgi\\_flags.20200506.xml](https://www.spec.org/accel/flags/pgi_flags.20200506.xml)



# SPEC ACCEL ACC Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology  
NVIDIA Tesla V100S-PCIE-32GB  
ThinkSystem SR665

SPECaccel\_acc\_peak = Not Run

SPECaccel\_acc\_base = 14.4

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Apr-2020

Hardware Availability: Jun-2020

Software Availability: Jun-2020

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC ACCEL v1.3.  
Report generated on Wed May 6 12:04:27 2020 by SPEC ACCEL PS/PDF formatter v1290.  
Originally published on 6 May 2020.