




CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 6800

SPECfp_rate2000 = --
SPECfp_rate_base2000 = 67.4

SPEC license #: 597 | Tested by: Verlag Heinz Heise (iX) | Test date: May-2001 | Hardware Avail: Mar-2001 | Software Avail: May-2001

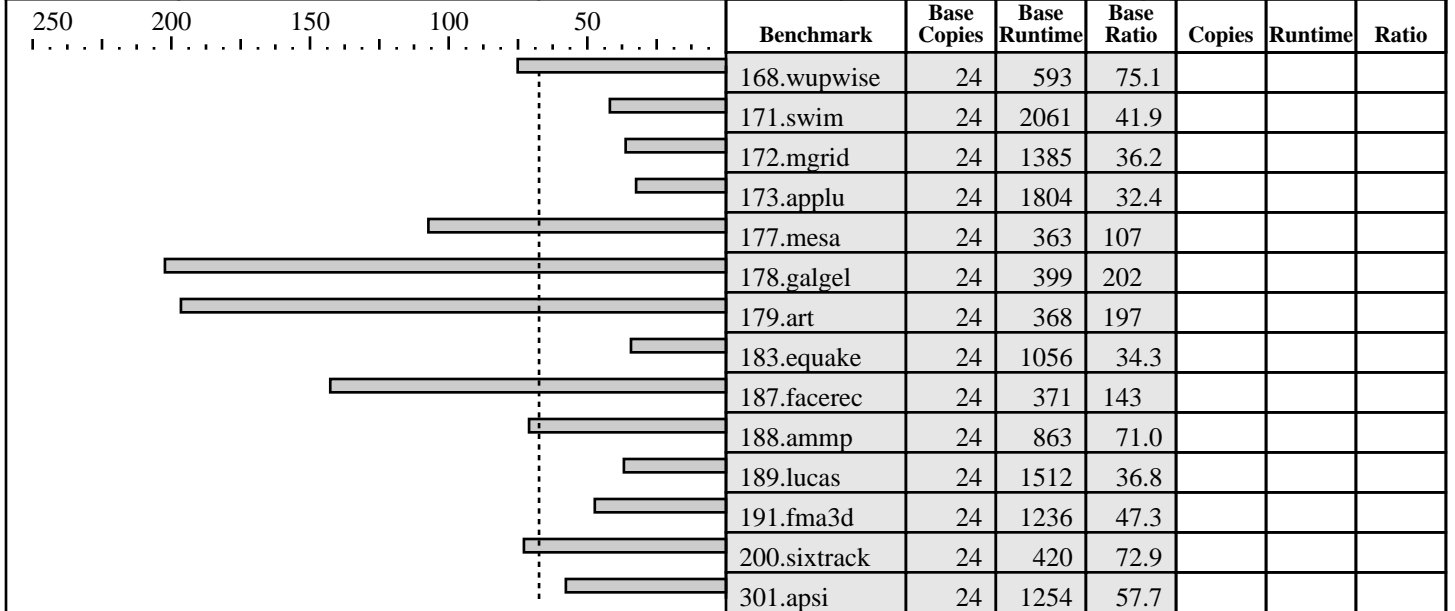

Hardware

CPU: UltraSPARC-III
 CPU MHz: 750
 FPU: Integrated
 CPU(s) enabled: 24 cores, 24 chips, 1 core/chip
 CPU(s) orderable: 2-24
 Parallel: No
 Primary Cache: 32KBI+64KBD on chip
 Secondary Cache: 8MB(I+D) off chip
 L3 Cache: None
 Other Cache: None
 Memory: 48GB
 Disk Subsystem: 8x36GB (RAID 10)
 Other Hardware:

Software

Operating System: Solaris 8
 Compiler: Forte Developer 6 update 2 C 5.3
 File System: UFS
 System State: Multi User

Notes/Tuning Information

Portability: 178.galgel: -e -fixed

C flags: -fast -xcrossfile -xprofile
 F90 flags: -fast -xcrossfile -xprofile
 ONESTEP = yes