CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Altix 3000 (1300MHz, Itanium 2)

SPECint_rate2000 = 158

SPECint_rate_base2000 = 158

SPEC license #: 4 | Tested by: SGI | Test date: Jun-2003 | Hardware Avail: Jun-2003 | Software Avail: Jun-2003

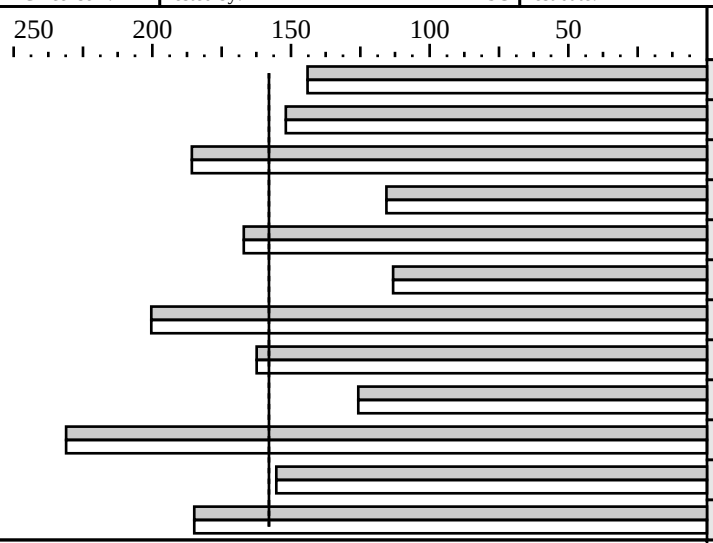

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	16	180	144	16	180	144
175.vpr	16	171	152	16	171	152
176.gcc	16	110	186	16	110	186
181.mcf	16	289	116	16	289	116
186.crafty	16	111	167	16	111	167
197.parser	16	295	113	16	295	113
252.eon	16	120	200	16	120	200
253.perlbmk	16	206	162	16	206	162
254.gap	16	162	126	16	162	126
255.vortex	16	153	231	16	153	231
256.bzip2	16	179	155	16	179	155
300.twolf	16	301	185	16	301	185

Hardware

CPU:	Intel Itanium 2
CPU MHz:	1300
FPU:	Integrated
CPU(s) enabled:	16 cores, 16 chips, 1 core/chip
CPU(s) orderable:	4-64
Parallel:	No
Primary Cache:	16KBI + 16KBD (on chip) per CPU
Secondary Cache:	256KB (on chip) per CPU
L3 Cache:	3.0MB (on chip) per CPU
Other Cache:	N/A
Memory:	32 GB (16*512MB DIMMS per 4cpu module)
Disk Subsystem:	1 x 36 GB SCSI (Seagate Cheetah 15k rpm)
Other Hardware:	None

Software

Operating System:	SGI ProPack(TM) v2.2
Compiler:	Intel(R) C++ Compiler for Linux 7.1 (Build 20030507)
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
+FDO: PASS1=-prof_gen  PASS2=-prof_use

Baseline optimization flags:
  C programs:       -ipo -O3 +FDO
  C++ programs:     -ipo -O2 +FDO -ansi_alias

Portability Flags:
  176.gcc: -DSPEC_CPU2000_LP64 -Dalloca=_builtin_alloca -D_LIBC
  186.crafty: -DLINUX_i386
  252.eon: -DSPEC_CPU2000_LP64 -DHAS_ERRLIST
  253.perlbmk: -DSPEC_CPU2000_LP64 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_LINUX_IA64 -DSPEC_CPU2000_GLIBC22
  254.gap: -DSPEC_CPU2000_LP64 -DSYS_HAS_CALLOC_PROTO -DSYS_IS_USG
           -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
  255.vortex: -DSPEC_CPU2000_LP64

Processes were bound to CPUs using dplace.

Peak flags same as baseline (basepeak=true set globally).
```