



# CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation


## Fujitsu Siemens Computers

PRIMERGY RX200 S3, Intel Xeon processor X5355, 2.66 GHz

SPECfp\_rate2000 = 103

SPECfp\_rate\_base2000 = 103

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Nov-2006 | Hardware Avail: Jan-2007 | Software Avail: Aug-2006

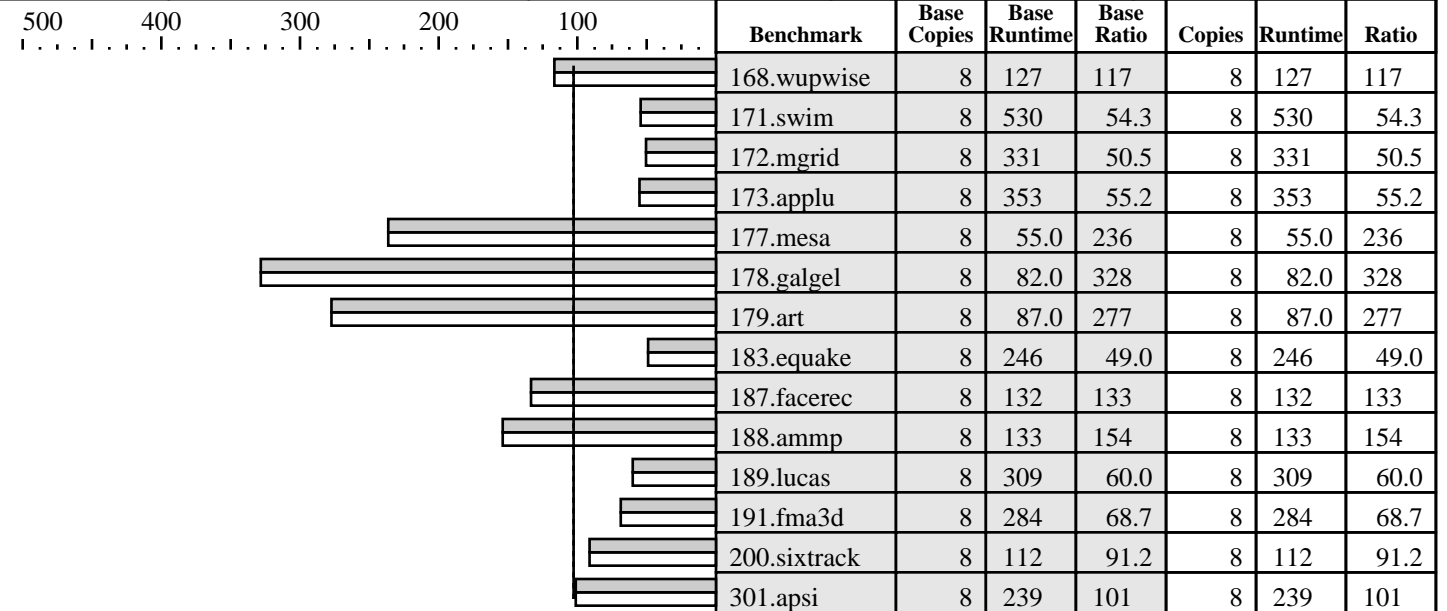

### Hardware

CPU: Intel Xeon processor X5355 (2.66 GHz, 2x4MB L2, 1333 MHz system bus)  
 CPU MHz: 2666  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Parallel: No  
 Primary Cache: 32KB(I) + 32KB(D) on chip, per core  
 Secondary Cache: 8MB(I+D) on chip, per chip (4MB shared per 2 cores)  
 L3 Cache: N/A  
 Other Cache: N/A  
 Memory: 8x1 GB DDR2-RAM PC2-5300F (CAS 5-5-5)  
 Disk Subsystem: Seagate ST373454SS (SAS, 15.4krpm, 73GB)  
 Other Hardware: none

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10  
 Kernel 2.6.16.21-0.8-smp on an x86\_64  
 Compiler: Intel C++ and Fortran Compiler 9.1 for EM64T  
 Build 20060816 (for 64-bit applications)  
 File System: reiserfs  
 System State: Multi-user run level 3

## Notes/Tuning Information

### GENERAL

+FDO implies feedback-directed optimization  
 PASS1: -prof\_gen PASS2: -prof\_use

Optimization flags  
 ONESTEP=yes set for all benchmarks

Portability flags  
 -DSPEC\_CPU2000\_LP64 applied to all benchmarks  
 178.galgel: -FI for fixed-format Fortran

Base tuning flags  
 for Fortran and C programs: -fast +FDO

Peak tuning flags  
 same as baseline (basepeak=true set globally)



# CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY RX200 S3, Intel Xeon processor X5355, 2.66 GHz

SPECfp\_rate2000 = 103

SPECfp\_rate\_base2000 = 103

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Nov-2006 | Hardware Avail: Jan-2007 | Software Avail: Aug-2006

## Notes/Tuning Information (Continued)

The system bus runs at 1333 MHz

This result was measured with 64-bit binaries using the 64-bit version of the operating system.

BIOS Configuration:

Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers in your country please see:  
<http://www.fujitsu-siemens.com/countries>