SPEC® CINT2006 Result

Intel Corporation

Intel DG965WH motherboard
(2.40 GHz, Intel Core 2 Duo processor E6600)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 27.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2007
Hardware Availability: Aug-2006
Software Availability: Aug-2006

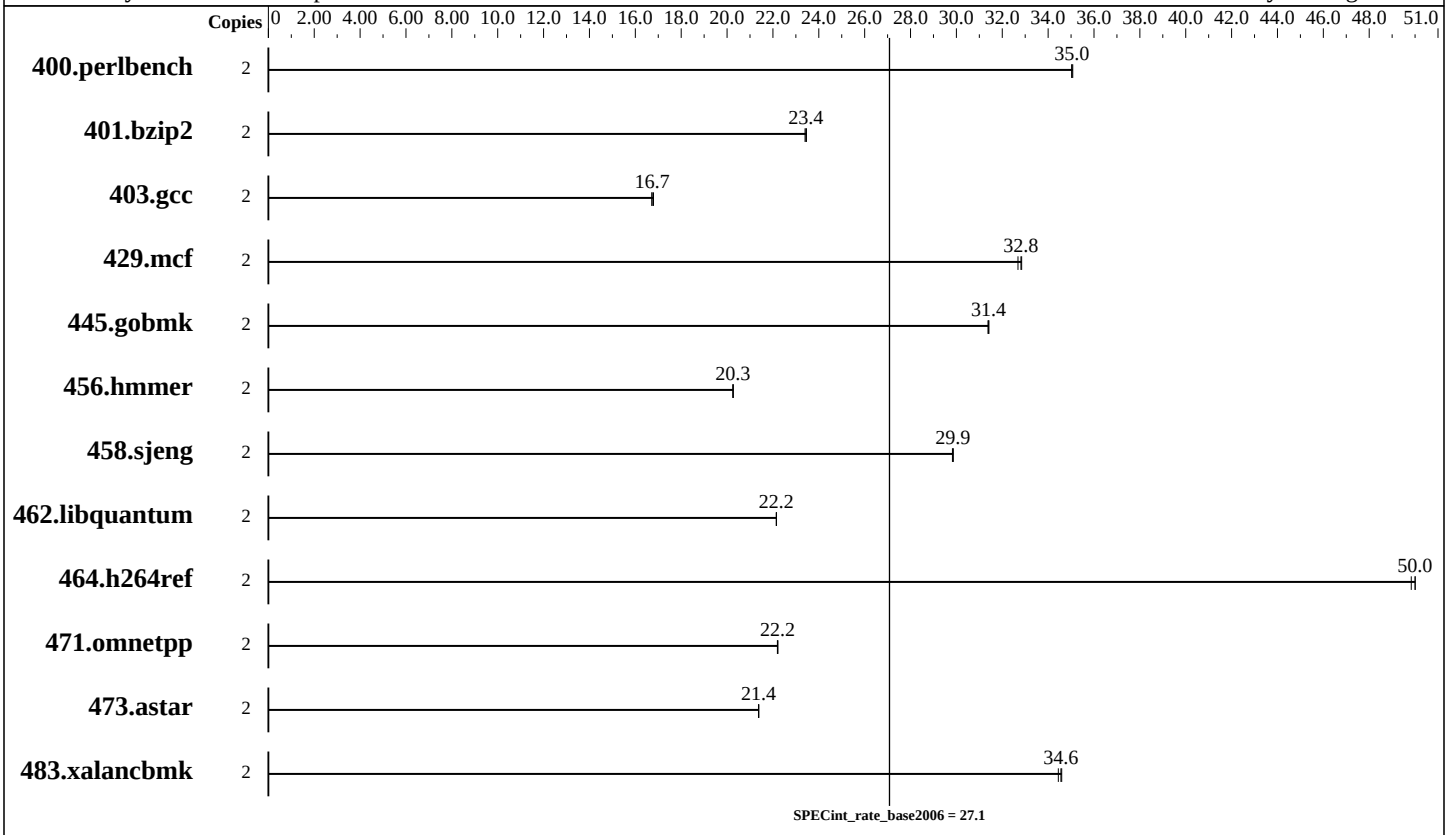

Hardware

CPU Name:	Intel Core 2 Duo E6600
CPU Characteristics:	2.40 GHz, 1066 MHz bus
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2 1GB Micron MT16HTF12864AY-80ED4 DDR2 800, CL5)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	SoundBlaster Live! PCI card

Software

Operating System:	Windows XP Professional w/ SP2
Compiler:	Intel C++ Compiler for IA32 version 9.1 Build no 20060816 Microsoft Visual Studio .Net 2003 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	Not Applicable
Other Software:	SmartHeap Library Version 8.0 from http://www.microquill.com/

SPEC CINT2006 Result

Intel Corporation

Intel DG965WH motherboard
(2.40 GHz, Intel Core 2 Duo processor E6600)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 27.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2007
Hardware Availability: Aug-2006
Software Availability: Aug-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	**558**	**35.0**	557	35.1	558	35.0							
401.bzip2	2	825	23.4	823	23.5	**823**	**23.4**							
403.gcc	2	963	16.7	**962**	**16.7**	959	16.8							
429.mcf	2	**556**	**32.8**	558	32.7	555	32.8							
445.gobmk	2	**668**	**31.4**	668	31.4	669	31.4							
456.hmmer	2	921	20.3	**921**	**20.3**	921	20.3							
458.sjeng	2	811	29.8	**811**	**29.9**	810	29.9							
462.libquantum	2	1870	22.2	1871	22.1	**1871**	**22.2**							
464.h264ref	2	885	50.0	**885**	**50.0**	888	49.8							
471.omnetpp	2	563	22.2	**563**	**22.2**	563	22.2							
473.astar	2	657	21.4	**657**	**21.4**	657	21.4							
483.xalancbmk	2	401	34.4	**399**	**34.6**	399	34.6							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 1/2007:
http://www.intel.com/products/motherboard/DG965WH/index.htm
The system bus runs at 1066 MHz
System was configured with Single nVidia Quad SLI Geforce 7950 GX2
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:
```
-fast /F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlw32m.lib
            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic91-flags.20090715.06.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic91-flags.20090715.06.xml`

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:24:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 February 2007.