



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge 1950 (Intel Xeon processor E5345, 2.33 GHz)

SPECfp®\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 55.0

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

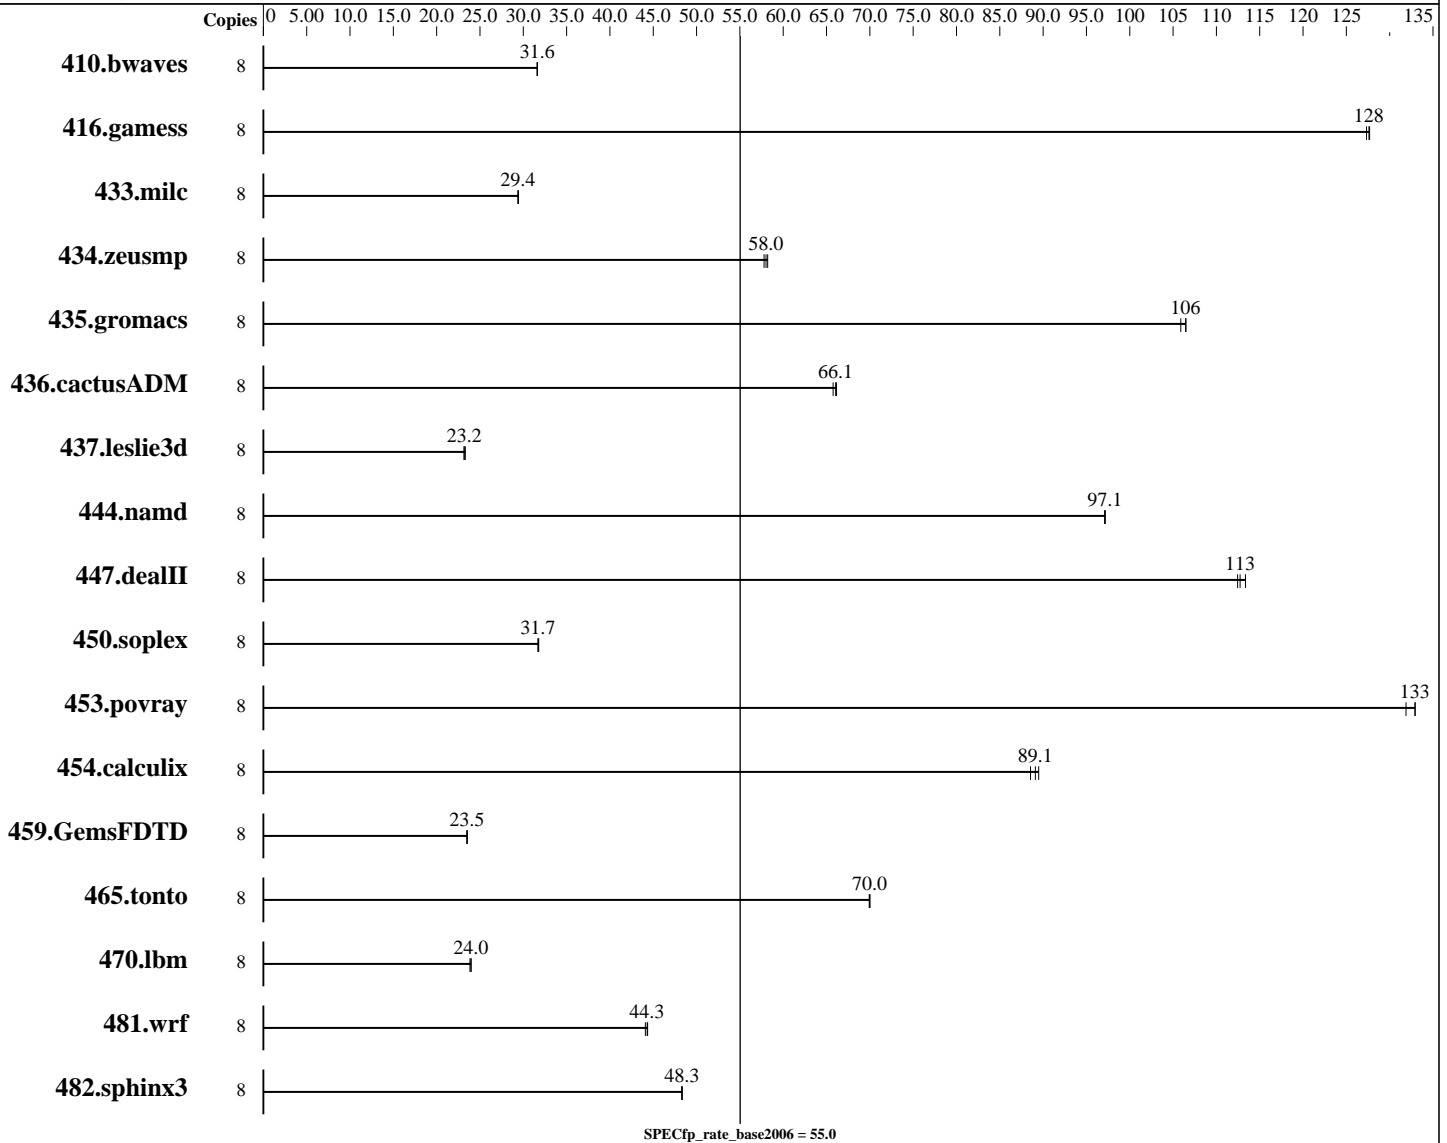

### Hardware

CPU Name: Intel Xeon E5345  
 CPU Characteristics: 1333 MHz Bus Speed  
 CPU MHz: 2333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

### Software

Operating System: SuSE Linux Enterprise Server 10 EM64T kernel 2.6.16.21-0.8-smp  
 Compiler: Intel C++ Compiler for Intel EM64T-based applications, Version 9.1  
 Package ID l\_cc\_c\_9.1.045 Build no 20061101  
 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1  
 Package ID l\_fc\_c\_9.1.040 Build no 20061101  
 Auto Parallel: No

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge 1950 (Intel Xeon processor E5345, 2.33 GHz)

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 55.0

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2006

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8 x 2 GB 667MHz CL5 DDR2 FB-DIMM SDRAM)  
Disk Subsystem: 1 x 73 GB SAS 15k RPM  
Other Hardware: None

File System: ext2  
System State: Multi-user run level 3  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3440	31.6	3438	31.6	<b><u>3439</u></b>	<b><u>31.6</u></b>							
416.gamess	8	1227	128	1230	127	<b><u>1228</u></b>	<b><u>128</u></b>							
433.milc	8	<b><u>2497</u></b>	<b><u>29.4</u></b>	2496	29.4	2499	29.4							
434.zeusmp	8	1260	57.8	<b><u>1255</u></b>	<b><u>58.0</u></b>	1251	58.2							
435.gromacs	8	536	106	<b><u>537</u></b>	<b><u>106</u></b>	539	106							
436.cactusADM	8	1445	66.2	1454	65.8	<b><u>1447</u></b>	<b><u>66.1</u></b>							
437.leslie3d	8	3247	23.2	<b><u>3244</u></b>	<b><u>23.2</u></b>	3226	23.3							
444.namd	8	660	97.2	<b><u>660</u></b>	<b><u>97.1</u></b>	661	97.1							
447.dealII	8	<b><u>812</u></b>	<b><u>113</u></b>	814	112	807	113							
450.soplex	8	2099	31.8	2104	31.7	<b><u>2104</u></b>	<b><u>31.7</u></b>							
453.povray	8	320	133	<b><u>320</u></b>	<b><u>133</u></b>	323	132							
454.calculix	8	745	88.5	<b><u>741</u></b>	<b><u>89.1</u></b>	738	89.5							
459.GemsFDTD	8	3609	23.5	3613	23.5	<b><u>3609</u></b>	<b><u>23.5</u></b>							
465.tonto	8	1125	70.0	1126	69.9	<b><u>1125</u></b>	<b><u>70.0</u></b>							
470.lbm	8	<b><u>4586</u></b>	<b><u>24.0</u></b>	4610	23.8	4586	24.0							
481.wrf	8	2015	44.4	<b><u>2017</u></b>	<b><u>44.3</u></b>	2027	44.1							
482.sphinx3	8	3225	48.4	<b><u>3228</u></b>	<b><u>48.3</u></b>	3229	48.3							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

Hardware Prefetcher disabled in BIOS  
Adjacent Cache Line Prefetch disabled in BIOS  
"ulimit -s unlimited" set

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge 1950 (Intel Xeon processor E5345, 2.33 GHz)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 55.0**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2007

**Hardware Availability:** Dec-2006

**Software Availability:** Nov-2006

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell-ic91-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell-ic91-flags.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge 1950 (Intel Xeon processor E5345, 2.33 GHz)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 55.0**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2007

**Hardware Availability:** Dec-2006

**Software Availability:** Nov-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 12:04:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 April 2007.