



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R410  
(Intel Xeon processor 3040,1.86GHz)

**SPECfp®\_rate2006 = 20.2**

**SPECfp\_rate\_base2006 = 19.9**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2007

Hardware Availability: Jun-2007

Software Availability: Dec-2006

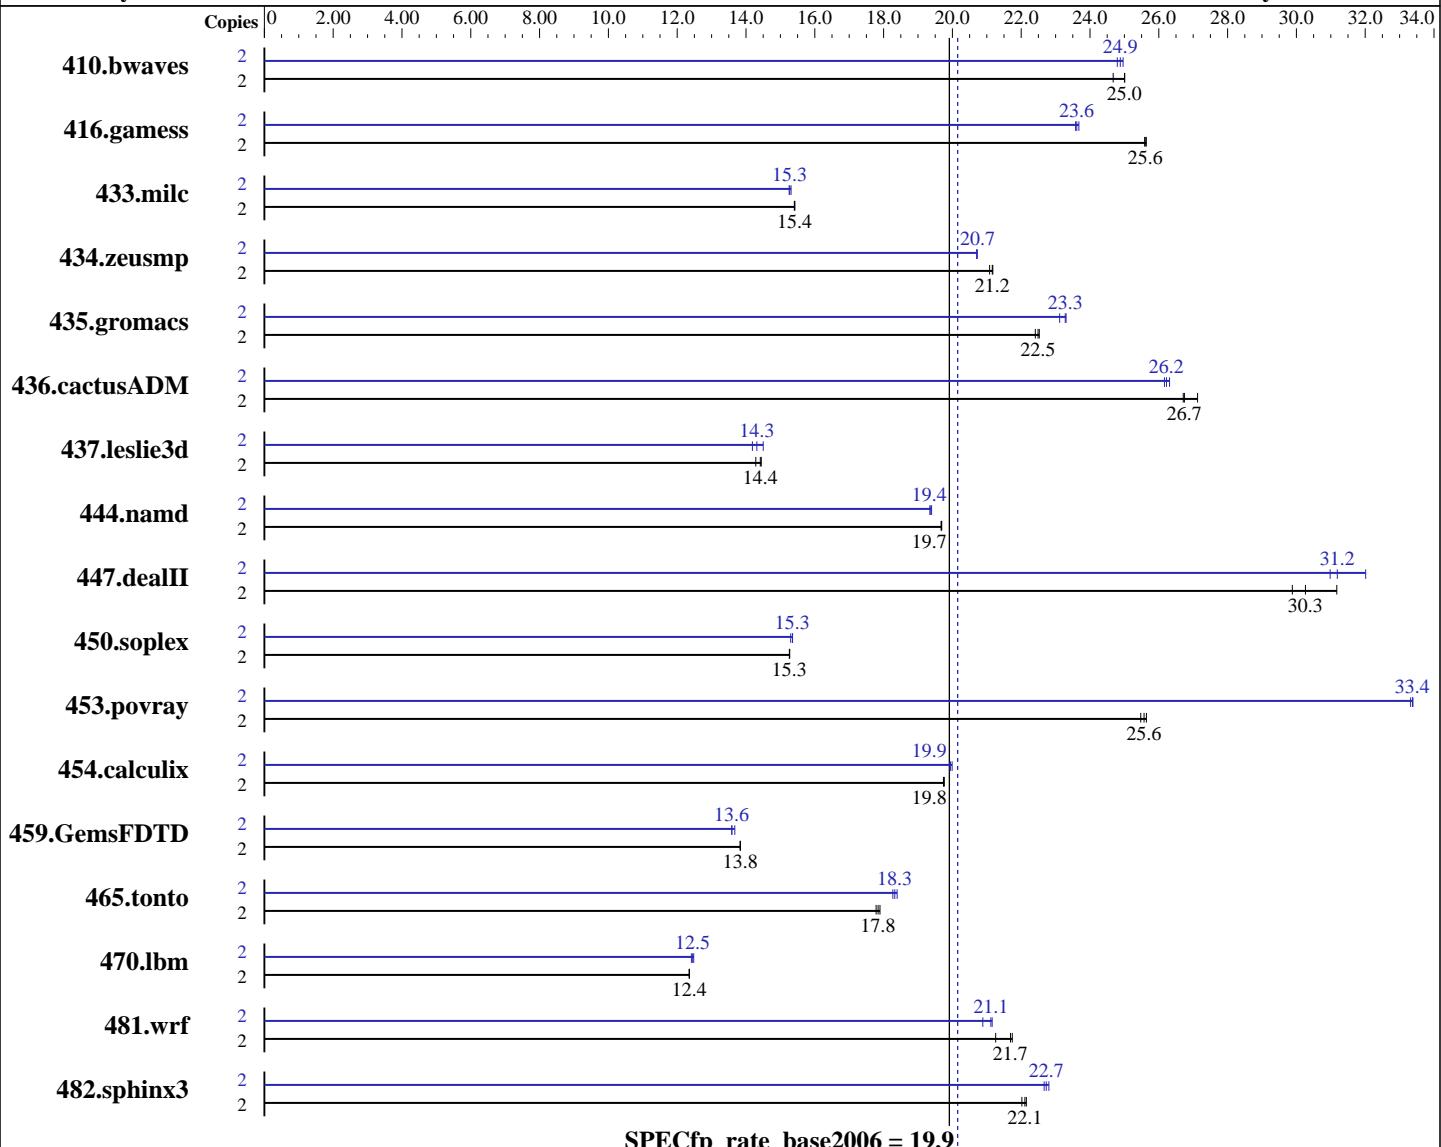

### Hardware

CPU Name: Intel Xeon 3040  
CPU Characteristics: 1.86 GHz, 4 MB L2, 1333 MHz system bus  
CPU MHz: 1860  
FPU: Integrated  
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 2 MB I+D on chip per chip

### Software

Operating System: SuSE Linux Enterprise Server 10 (EM64T)  
Compiler: Intel C++ Compiler for Intel EM64T-based applications, Version 9.1  
Auto Parallel: No

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R410  
(Intel Xeon processor 3040, 1.86GHz)

**SPECfp\_rate2006 = 20.2**

**SPECfp\_rate\_base2006 = 19.9**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2007

Hardware Availability: Jun-2007

Software Availability: Dec-2006

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (4x2 GB) PC2-5300E ECC CL5  
Disk Subsystem: 1x80 GB SATA, 10000 RPM  
Other Hardware: None

File System: ext2  
System State: Multi-user run level 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	1102	24.7	1087	25.0	<b>1087</b>	<b>25.0</b>	2	<b>1092</b>	<b>24.9</b>	1089	25.0	1096	24.8
416.gamess	2	<b>1529</b>	<b>25.6</b>	1530	25.6	1527	25.6	2	1654	23.7	<b>1658</b>	<b>23.6</b>	1661	23.6
433.milc	2	1192	15.4	1191	15.4	<b>1191</b>	<b>15.4</b>	2	1199	15.3	<b>1202</b>	<b>15.3</b>	1204	15.3
434.zeusmp	2	<b>860</b>	<b>21.2</b>	859	21.2	863	21.1	2	879	20.7	878	20.7	<b>879</b>	<b>20.7</b>
435.gromacs	2	637	22.4	634	22.5	<b>635</b>	<b>22.5</b>	2	618	23.1	<b>613</b>	<b>23.3</b>	613	23.3
436.cactusADM	2	881	27.1	895	26.7	<b>894</b>	<b>26.7</b>	2	<b>911</b>	<b>26.2</b>	913	26.2	908	26.3
437.leslie3d	2	1302	14.4	<b>1304</b>	<b>14.4</b>	1316	14.3	2	1296	14.5	<b>1313</b>	<b>14.3</b>	1325	14.2
444.namd	2	<b>815</b>	<b>19.7</b>	815	19.7	815	19.7	2	<b>828</b>	<b>19.4</b>	827	19.4	829	19.3
447.dealII	2	<b>756</b>	<b>30.3</b>	766	29.9	734	31.2	2	<b>734</b>	<b>31.2</b>	739	31.0	715	32.0
450.soplex	2	<b>1093</b>	<b>15.3</b>	1092	15.3	1093	15.3	2	1086	15.4	<b>1087</b>	<b>15.3</b>	1090	15.3
453.povray	2	418	25.5	<b>416</b>	<b>25.6</b>	415	25.6	2	<b>319</b>	<b>33.4</b>	319	33.4	319	33.3
454.calculix	2	836	19.7	835	19.8	<b>835</b>	<b>19.8</b>	2	825	20.0	828	19.9	<b>827</b>	<b>19.9</b>
459.GemsFDTD	2	1533	13.8	1534	13.8	<b>1534</b>	<b>13.8</b>	2	1552	13.7	<b>1562</b>	<b>13.6</b>	1562	13.6
465.tonto	2	1107	17.8	<b>1103</b>	<b>17.8</b>	1100	17.9	2	<b>1074</b>	<b>18.3</b>	1077	18.3	1070	18.4
470.lbm	2	2224	12.4	<b>2224</b>	<b>12.4</b>	2225	12.3	2	2202	12.5	<b>2207</b>	<b>12.5</b>	2214	12.4
481.wrf	2	<b>1030</b>	<b>21.7</b>	1051	21.3	1028	21.7	2	<b>1058</b>	<b>21.1</b>	1070	20.9	1056	21.2
482.sphinx3	2	1760	22.2	1770	22.0	<b>1763</b>	<b>22.1</b>	2	<b>1720</b>	<b>22.7</b>	1709	22.8	<b>1715</b>	<b>22.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Environment stack size set to 'unlimited'  
'/usr/bin/taskset' used to bind processes to CPUs

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R410  
(Intel Xeon processor 3040,1.86GHz)

**SPECfp\_rate2006 = 20.2**

**SPECfp\_rate\_base2006 = 19.9**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2007

Hardware Availability: Jun-2007

Software Availability: Dec-2006

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-fast

Fortran benchmarks:  
-fast

Benchmarks using both Fortran and C:  
-fast

## Peak Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R410  
(Intel Xeon processor 3040,1.86GHz)

**SPECfp\_rate2006 = 20.2**

**SPECfp\_rate\_base2006 = 19.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Jun-2007

**Hardware Availability:** Jun-2007

**Software Availability:** Dec-2006

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
-prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32

C++ benchmarks:  
-prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32

Fortran benchmarks:  
-prof\_gen(pass 1) -prof\_use(pass 2) -fast

Benchmarks using both Fortran and C:  
-prof\_gen(pass 1) -prof\_use(pass 2) -fast -auto\_ilp32

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel91\\_flags.html](http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel91\\_flags.xml](http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 13:03:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 July 2007.