



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i120Rg-1
(Intel Xeon processor 5148)

SPECint_rate2006 = 53.7

SPECint_rate_base2006 = 50.0

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2007

Hardware Availability: May-2007

Software Availability: Jun-2007

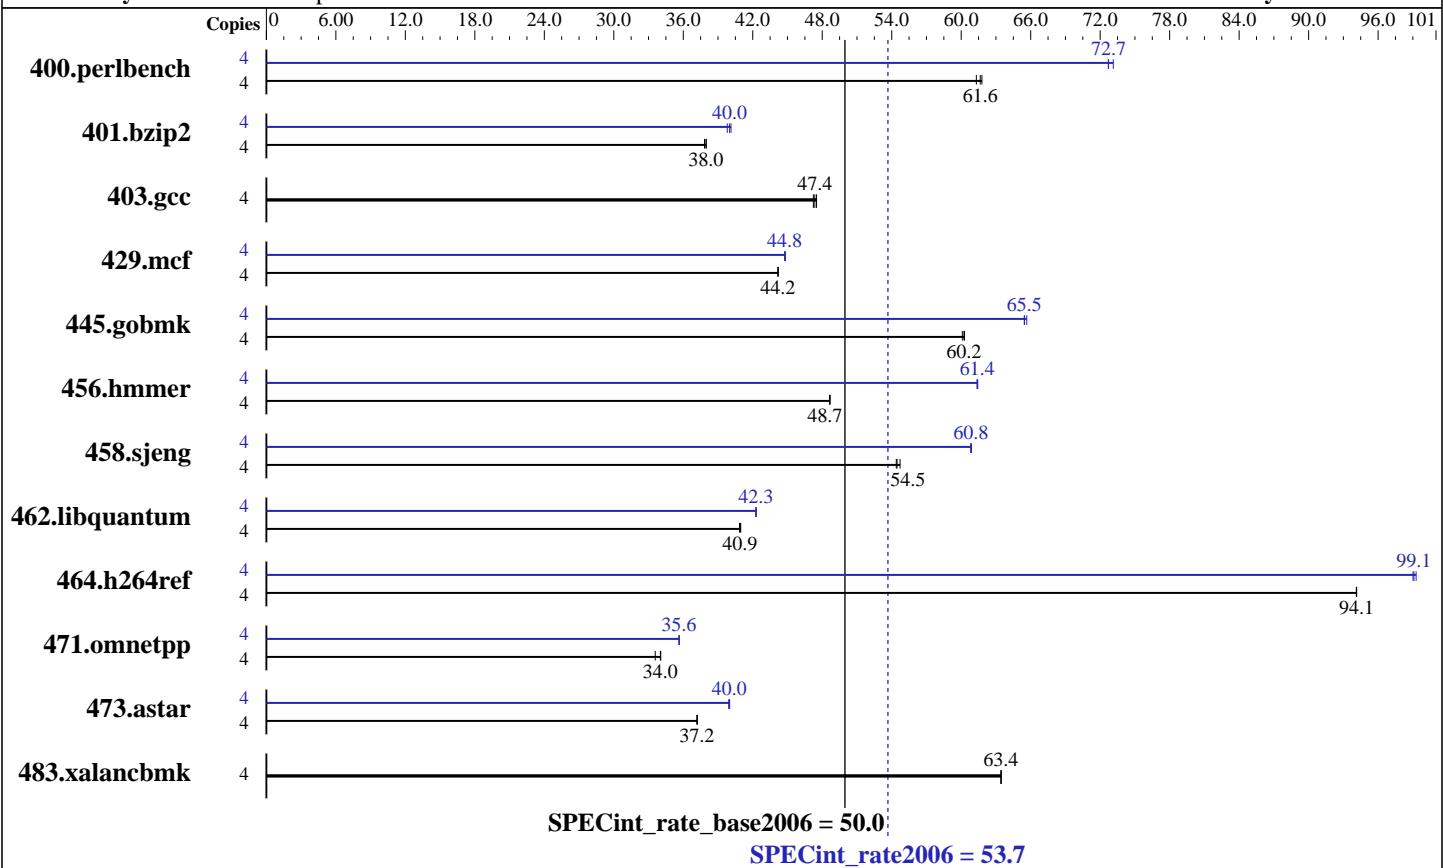

Hardware

CPU Name: Intel Xeon 5148
CPU Characteristics: 2.33 GHz, 4MB L2, 1333MHz bus
CPU MHz: 2333
FPU: Integrated
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per chip
L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 15000RPM
Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp for x86_64
Compiler: Intel C++ Compiler for IA32/EM64T application, Version 10.0 - Build 20070426 Package ID: l_cc_p_10.0.023
Auto Parallel: No
File System: ext2
System State: Multiuser, Runlevel 3
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i120Rg-1
(Intel Xeon processor 5148)

SPECint_rate2006 = 53.7

SPECint_rate_base2006 = 50.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2007

Hardware Availability: May-2007

Software Availability: Jun-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	637	61.3	632	61.8	634	61.6	4	538	72.7	534	73.1	537	72.7
401.bzip2	4	1020	37.8	1017	38.0	1016	38.0	4	965	40.0	970	39.8	962	40.1
403.gcc	4	682	47.2	680	47.4	678	47.5	4	682	47.2	680	47.4	678	47.5
429.mcf	4	826	44.2	825	44.2	826	44.2	4	814	44.8	815	44.8	815	44.8
445.gobmk	4	697	60.2	698	60.1	696	60.3	4	641	65.5	639	65.7	641	65.4
456.hammer	4	767	48.6	767	48.7	767	48.7	4	608	61.4	608	61.4	608	61.4
458.sjeng	4	885	54.7	890	54.4	889	54.5	4	796	60.8	795	60.9	796	60.8
462.libquantum	4	2029	40.9	2023	41.0	2026	40.9	4	1959	42.3	1960	42.3	1961	42.3
464.h264ref	4	940	94.1	940	94.1	940	94.2	4	893	99.1	892	99.3	894	99.0
471.omnetpp	4	734	34.1	735	34.0	745	33.6	4	702	35.6	701	35.6	701	35.6
473.astar	4	755	37.2	755	37.2	755	37.2	4	702	40.0	702	40.0	703	39.9
483.xalancbmk	4	435	63.4	435	63.4	435	63.4	4	435	63.4	435	63.4	435	63.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer,
for peak, are compiled in 64-bit mode

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i120Rg-1
(Intel Xeon processor 5148)

SPECint_rate2006 = 53.7

SPECint_rate_base2006 = 50.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2007

Hardware Availability: May-2007

Software Availability: Jun-2007

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc

456.hmmr: /opt/intel/cce/10.0.023/bin/icc

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -L/opt/intel/cce/10.0.023/lib -I/opt/intel/cce/10.0.023/include
-prof-gen(pass 1) -prof-use(pass 2) -fast

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i120Rg-1
(Intel Xeon processor 5148)

SPECint_rate2006 = 53.7

SPECint_rate_base2006 = 50.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2007

Hardware Availability: May-2007

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec_div -ansi-alias

456.hmmr: -L/opt/intel/cce/10.0.023/lib -I/opt/intel/cce/10.0.023/include
-prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -Obo
-prefetch -opt-streaming-stores always

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec_div -ansi-alias -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-ic10-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-ic10-linux-flags.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i120Rg-1
(Intel Xeon processor 5148)

SPECint_rate2006 = 53.7

SPECint_rate_base2006 = 50.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2007

Hardware Availability: May-2007

Software Availability: Jun-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 13:19:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 July 2007.