



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint[®]_rate2006 = 213

Acer Altos R920 (Intel Xeon X7350)

SPECint_rate_base2006 = 177

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Oct-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

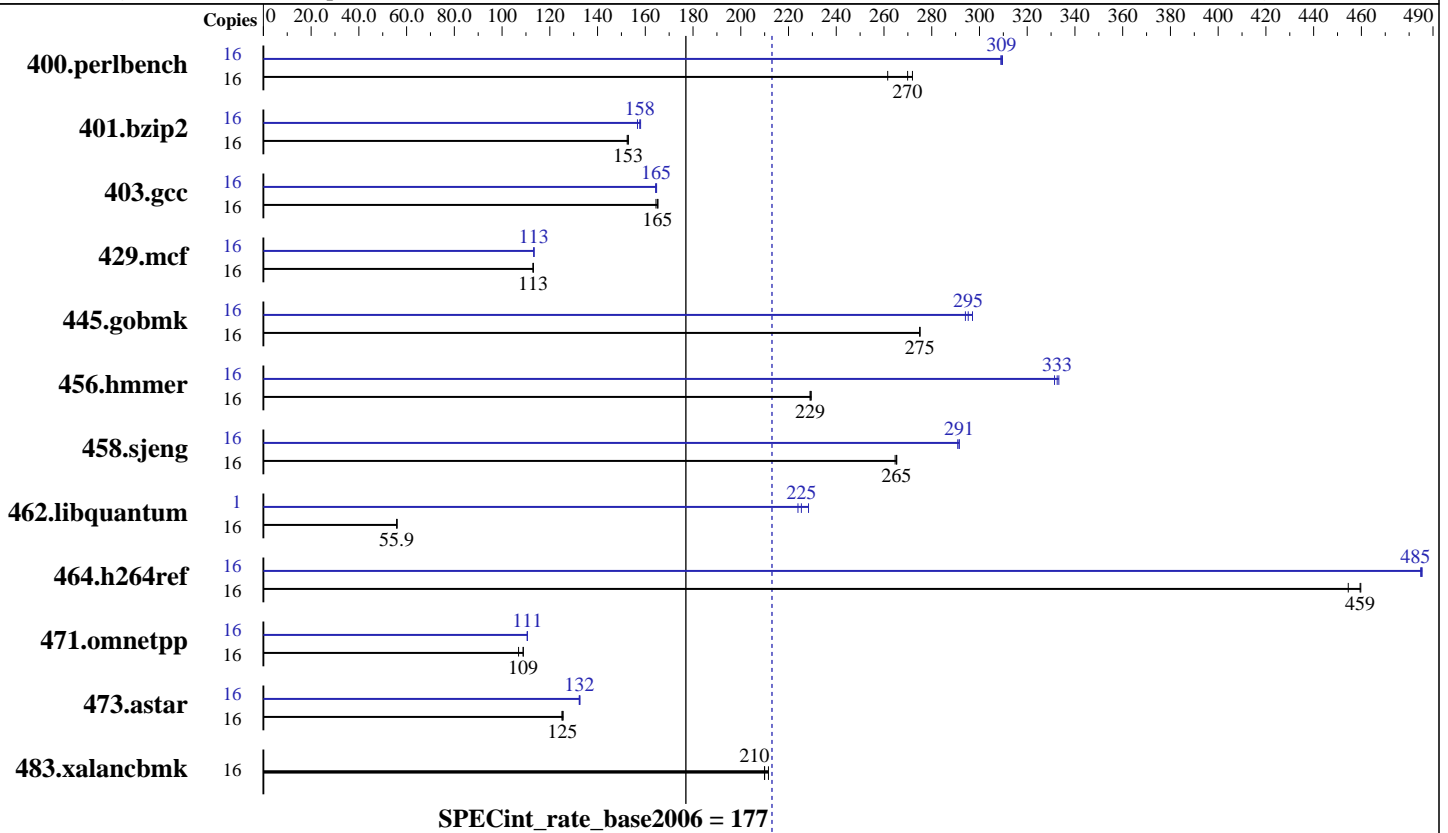

Hardware

CPU Name: Intel Xeon X7350
 CPU Characteristics: 1066MHz system bus
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 1, 2, 4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (16 x 1024MB ECC FB-DIMM DDR2-667 CL5-5-5)
 Disk Subsystem: 1 x 73GB 10000PRM SAS HDD
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 SP1 EM64T (kernel 2.6.16.46-0.12-smp)
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070725
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 213

Acer Altos R920 (Intel Xeon X7350)

SPECint_rate_base2006 = 177

CPU2006 license: 97

Test date: Oct-2007

Test sponsor: Acer Incorporated

Hardware Availability: Nov-2007

Tested by: Acer Incorporated

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	598	262	575	272	579	270	16	506	309	505	310	505	309
401.bzip2	16	1011	153	1013	152	1010	153	16	979	158	977	158	985	157
403.gcc	16	779	165	783	164	780	165	16	784	164	782	165	783	165
429.mcf	16	1291	113	1291	113	1290	113	16	1288	113	1287	113	1287	113
445.gobmk	16	610	275	610	275	610	275	16	565	297	568	295	571	294
456.hammer	16	652	229	650	230	652	229	16	448	333	450	331	449	333
458.sjeng	16	730	265	730	265	731	265	16	664	292	666	291	664	291
462.libquantum	16	5921	56.0	5932	55.9	5931	55.9	1	92.5	224	91.9	225	90.7	228
464.h264ref	16	770	460	779	455	771	459	16	730	485	729	485	730	485
471.omnetpp	16	918	109	935	107	919	109	16	905	111	904	111	904	111
473.astar	16	894	126	898	125	897	125	16	847	133	848	132	849	132
483.xalancbmk	16	526	210	526	210	522	212	16	526	210	526	210	522	212

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

BIOS Settings

Snoop Filter set to OFF

Snoop Filter preserves cache coherency while minimizing snoops to remote nodes.

Adjacent Cache Line Prefetch set to OFF

Prefetch data in order to shorten execution cycles and maximize data processing efficiency.

Optimization for high-frequency FSB applications set to OFF

All results used taskset to bind processes to cores.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 213

Acer Altos R920 (Intel Xeon X7350)

SPECint_rate_base2006 = 177

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Oct-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 213

Acer Altos R920 (Intel Xeon X7350)

SPECint_rate_base2006 = 177

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Oct-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 213

Acer Altos R920 (Intel Xeon X7350)

SPECint_rate_base2006 = 177

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Oct-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.22.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.22.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:06:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 October 2007.