



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint®_rate2006 = 110

Servidor Itautec LX211 (Intel Xeon E5410)

SPECint_rate_base2006 = 85.4

CPU2006 license: 9001


Test date: Apr-2008

Test sponsor: Itautec

Hardware Availability: Dec-2007

Tested by: Itautec

Software Availability: Jan-2008

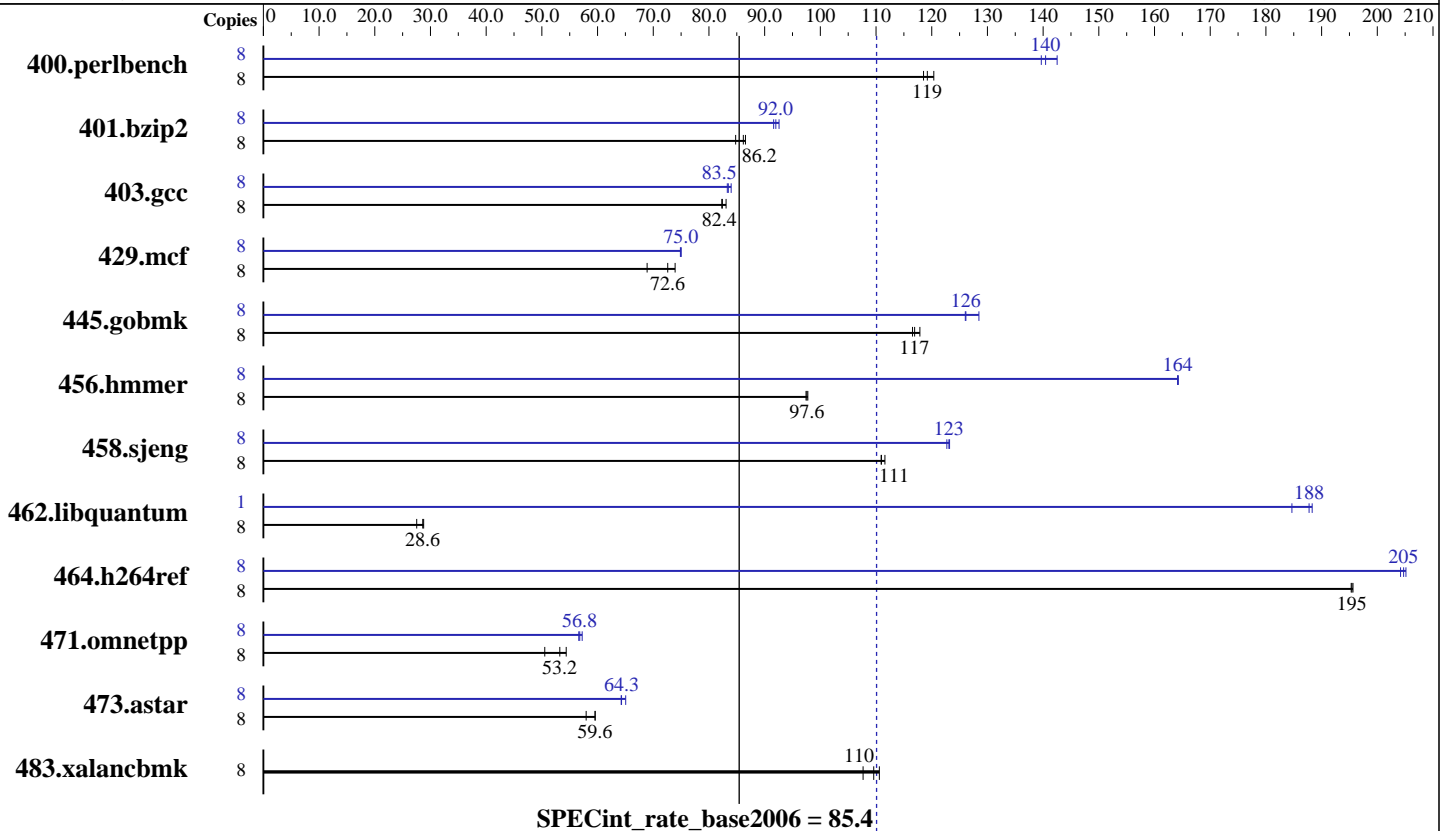

Hardware

CPU Name: Intel Xeon E5410
 CPU Characteristics:
 CPU MHz: 2330
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 12 GB (6 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
 Disk Subsystem: 1 x SCSI, 73GB, 15000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run Level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.17.10.50
 MicroQuill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 110

Servidor Itaotec LX211 (Intel Xeon E5410)

SPECint_rate_base2006 = 85.4

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	659	119	656	119	649	120	8	560	140	557	140	548	143
401.bzip2	8	910	84.8	896	86.2	892	86.6	8	843	91.6	839	92.0	834	92.6
403.gcc	8	782	82.3	781	82.4	775	83.1	8	771	83.5	773	83.3	767	84.0
429.mcf	8	1059	68.9	1005	72.6	987	73.9	8	974	74.9	973	75.0	973	75.0
445.gobmk	8	712	118	718	117	720	117	8	653	128	666	126	665	126
456.hammer	8	766	97.4	764	97.8	765	97.6	8	454	164	455	164	455	164
458.sjeng	8	872	111	873	111	867	112	8	786	123	789	123	786	123
462.libquantum	8	6021	27.5	5793	28.6	5760	28.8	1	110	188	112	185	110	188
464.h264ref	8	906	195	906	195	905	196	8	867	204	863	205	865	205
471.omnetpp	8	990	50.5	939	53.2	920	54.4	8	874	57.2	880	56.8	883	56.6
473.astar	8	969	58.0	943	59.6	943	59.6	8	863	65.1	874	64.2	873	64.3
483.xalancbmk	8	513	108	504	110	499	111	8	513	108	504	110	499	111

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors, except for 462.libquantum at peak.

Platform Notes

BIOS configuration:
Hardware Prefetch Enabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 110

Servidor Itautec LX211 (Intel Xeon E5410)

SPECint_rate_base2006 = 85.4

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include

456.hmmer: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 110

Servidor Itautec LX211 (Intel Xeon E5410)

SPECint_rate_base2006 = 85.4

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 110

Servidor Itaotec LX211 (Intel Xeon E5410)

SPECint_rate_base2006 = 85.4

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaotec-ic10.1-INT-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itaotec-ic10.1-INT-intel64-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 16:46:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 April 2008.