



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp[®]_rate2006 = 36.3

Servidor Itaotec MX201 (Intel Xeon E5405)

SPECfp_rate_base2006 = 34.0

CPU2006 license: 9001


Test date: Apr-2008

Test sponsor: Itaotec

Hardware Availability: Dec-2007

Tested by: Itaotec

Software Availability: Jan-2008

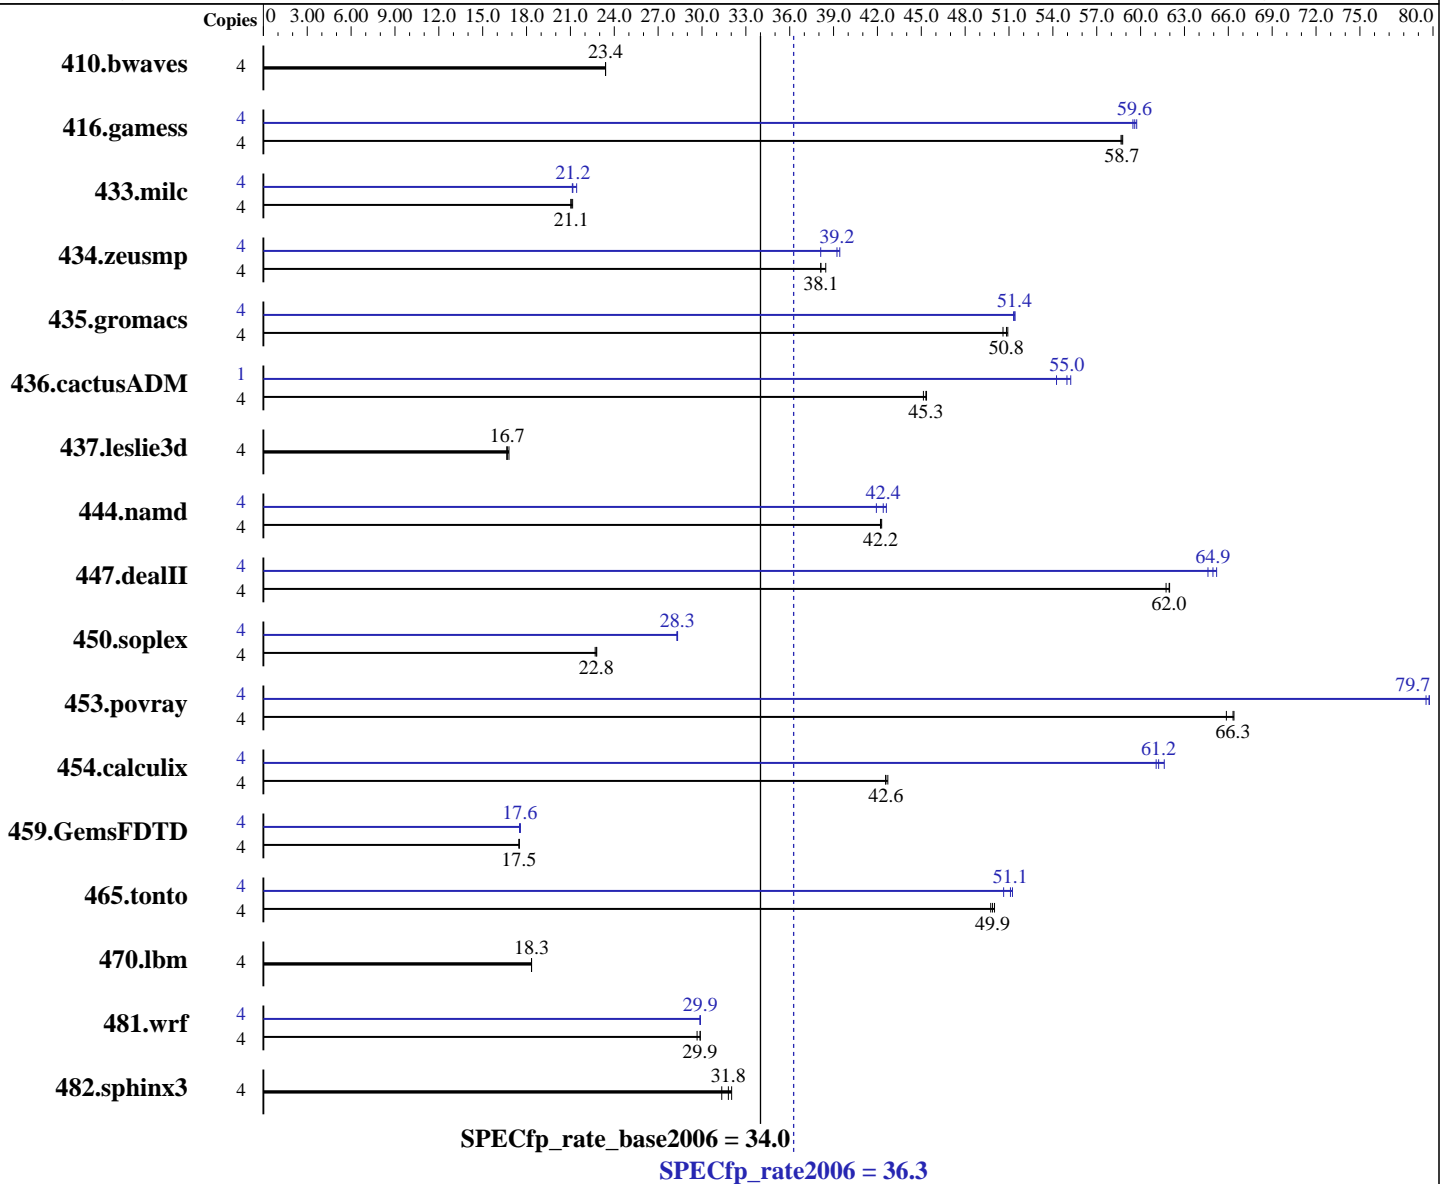

Hardware

CPU Name: Intel Xeon E5405
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler for Linux version 10.1
 Build 20080112 Package ID: l_cc_p_10.1.012, l_fc_p_10.1.012
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run Level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 36.3

Servidor Itaotec MX201 (Intel Xeon E5405)

SPECfp_rate_base2006 = 34.0

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
Disk Subsystem: 1 x SCSI, 73GB, 15000 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.10.50

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	2323	23.4	<u>2323</u>	<u>23.4</u>	2322	23.4	4	2323	23.4	<u>2323</u>	<u>23.4</u>	2322	23.4		
416.gamess	4	1335	58.7	1333	58.8	<u>1334</u>	<u>58.7</u>	4	1317	59.5	1311	59.7	<u>1314</u>	<u>59.6</u>		
433.milc	4	1736	21.2	1746	21.0	<u>1743</u>	<u>21.1</u>	4	<u>1735</u>	<u>21.2</u>	1714	21.4	1738	21.1		
434.zeusmp	4	<u>955</u>	<u>38.1</u>	955	38.1	946	38.5	4	<u>928</u>	<u>39.2</u>	923	39.4	955	38.1		
435.gromacs	4	<u>562</u>	<u>50.8</u>	565	50.6	561	50.9	4	557	51.3	556	51.4	<u>556</u>	<u>51.4</u>		
436.cactusADM	4	1059	45.1	<u>1055</u>	<u>45.3</u>	1054	45.4	1	216	55.2	220	54.2	<u>217</u>	<u>55.0</u>		
437.leslie3d	4	2259	16.6	2238	16.8	<u>2253</u>	<u>16.7</u>	4	2259	16.6	2238	16.8	<u>2253</u>	<u>16.7</u>		
444.namd	4	759	42.3	760	42.2	<u>760</u>	<u>42.2</u>	4	<u>757</u>	<u>42.4</u>	753	42.6	765	41.9		
447.dealII	4	<u>739</u>	<u>62.0</u>	738	62.0	741	61.7	4	702	65.2	708	64.6	<u>705</u>	<u>64.9</u>		
450.soplex	4	<u>1465</u>	<u>22.8</u>	1463	22.8	1470	22.7	4	1180	28.3	1177	28.3	<u>1178</u>	<u>28.3</u>		
453.povray	4	323	65.9	321	66.4	<u>321</u>	<u>66.3</u>	4	<u>267</u>	<u>79.7</u>	267	79.7	268	79.5		
454.calculix	4	775	42.6	<u>775</u>	<u>42.6</u>	773	42.7	4	540	61.1	<u>539</u>	<u>61.2</u>	536	61.6		
459.GemsFDTD	4	<u>2426</u>	<u>17.5</u>	2426	17.5	2425	17.5	4	2422	17.5	2415	17.6	<u>2417</u>	<u>17.6</u>		
465.tonto	4	787	50.0	791	49.7	<u>789</u>	<u>49.9</u>	4	<u>770</u>	<u>51.1</u>	777	50.6	768	51.2		
470.lbm	4	2997	18.3	<u>2997</u>	<u>18.3</u>	2996	18.3	4	2997	18.3	<u>2997</u>	<u>18.3</u>	2996	18.3		
481.wrf	4	<u>1496</u>	<u>29.9</u>	1495	29.9	1506	29.7	4	1496	29.9	1495	29.9	<u>1495</u>	<u>29.9</u>		
482.sphinx3	4	2434	32.0	<u>2451</u>	<u>31.8</u>	2487	31.4	4	2434	32.0	<u>2451</u>	<u>31.8</u>	2487	31.4		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors, except for 436.cactusADM at peak.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 36.3

Servidor Itaotec MX201 (Intel Xeon E5405)

SPECfp_rate_base2006 = 34.0

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Platform Notes

BIOS configuration:
Hardware Prefetch Disabled

General Notes

This result was measured on the Servidor Itaotec MX201.
The Servidor Itaotec MX201 and the Servidor Itaotec MX221 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 36.3

Servidor Itaotec MX201 (Intel Xeon E5405)

SPECfp_rate_base2006 = 34.0

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks (except as noted below):
icpc

450.soplex: /opt/intel/cc/10.1.012/bin/icpc -L/opt/intel/cc/10.1.012/lib
-I/opt/intel/cc/10.1.012/include

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 36.3

Servidor Itaotec MX201 (Intel Xeon E5405)

SPECfp_rate_base2006 = 34.0

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 36.3

Servidor Itautec MX201 (Intel Xeon E5405)

SPECfp_rate_base2006 = 34.0

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Apr-2008

Hardware Availability: Dec-2007

Software Availability: Jan-2008

Peak Optimization Flags (Continued)

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-FP-intel64-linux-flags.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-FP-intel64-linux-flags.20090713.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 16:55:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 April 2008.