



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS


NovaScale T860 E1
(Intel Xeon E5440, 2.83GHz)

SPECfp®_rate2006 = 71.2

SPECfp_rate_base2006 = 64.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

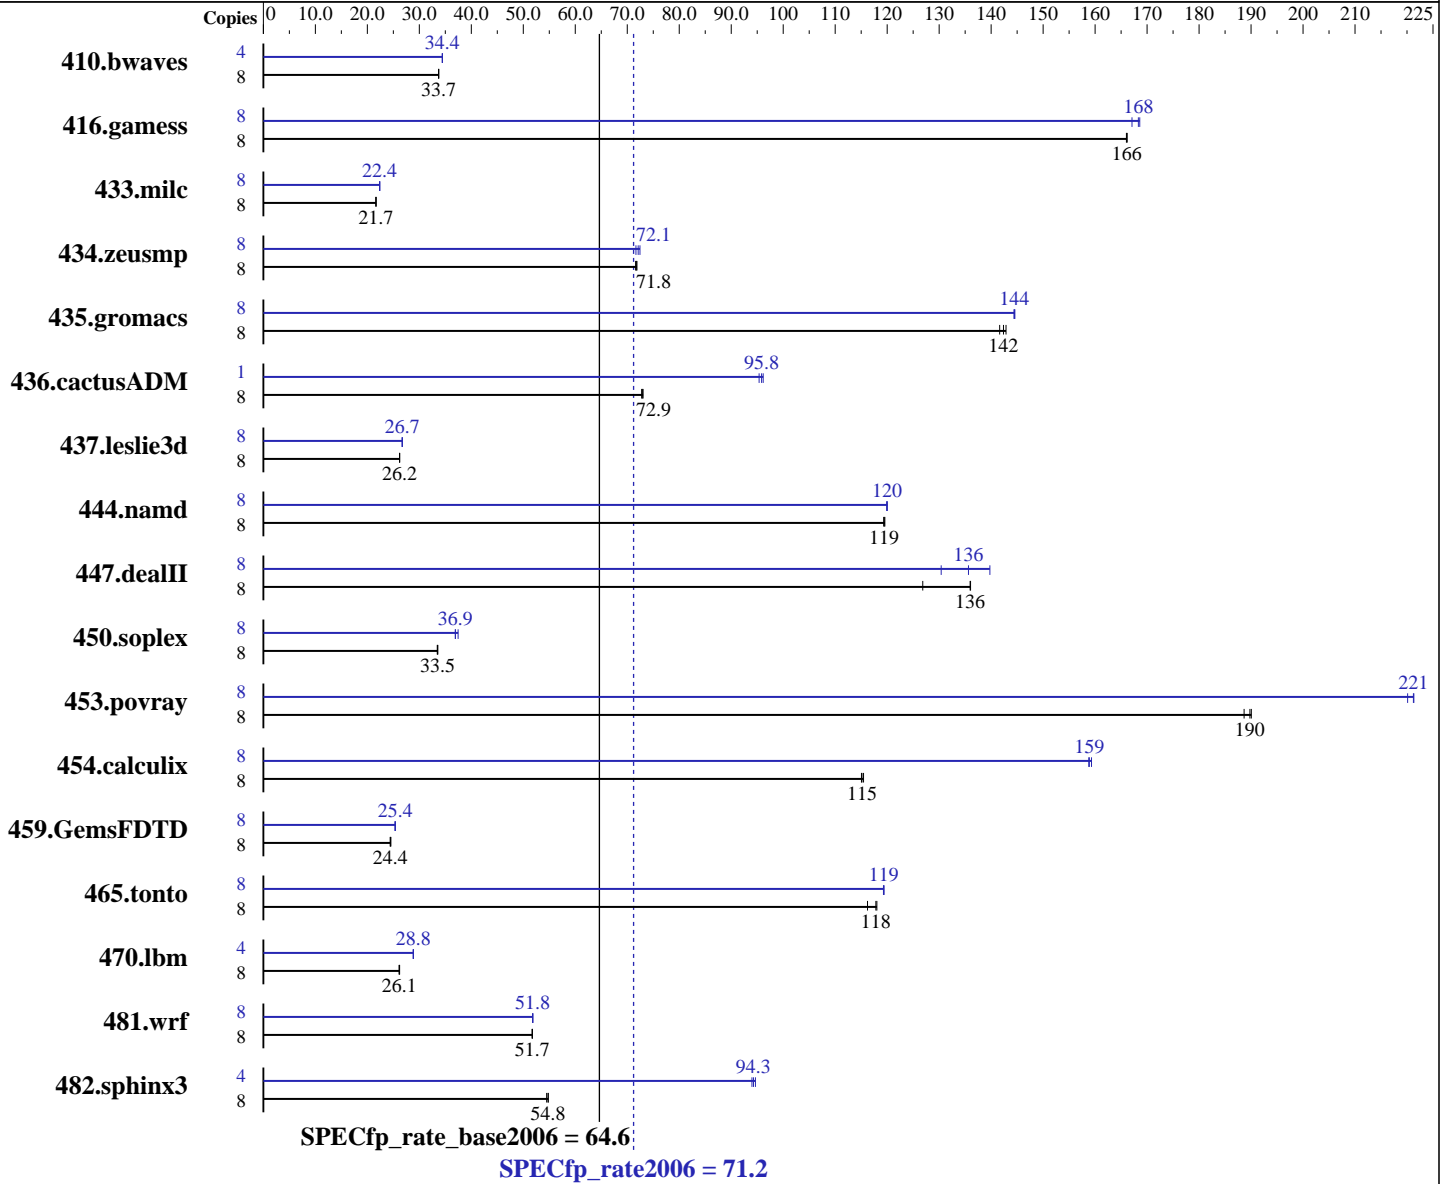

Hardware

CPU Name: Intel Xeon E5440
CPU Characteristics: 2.83 GHz, 2x6 MB L2 shared, 1333 MHz bus
CPU MHz: 2833
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel: Yes
File System: ext2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5440, 2.83GHz)

SPECfp_rate2006 = 71.2

SPECfp_rate_base2006 = 64.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 15000RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.tar.gz, Version 2.17

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	3224	33.7	<u>3224</u>	<u>33.7</u>	3225	33.7	4	1579	34.4	1579	34.4	<u>1579</u>	<u>34.4</u>		
416.gamess	8	943	166	943	166	<u>943</u>	<u>166</u>	8	937	167	<u>931</u>	<u>168</u>	929	169		
433.milc	8	3390	21.7	3391	21.7	<u>3390</u>	<u>21.7</u>	8	<u>3283</u>	<u>22.4</u>	3283	22.4	3281	22.4		
434.zeusmp	8	1017	71.6	<u>1015</u>	<u>71.8</u>	1013	71.9	8	<u>1010</u>	<u>72.1</u>	1005	72.4	1016	71.7		
435.gromacs	8	<u>401</u>	<u>142</u>	403	142	400	143	8	396	144	<u>395</u>	<u>144</u>	395	145		
436.cactusADM	8	<u>1311</u>	<u>72.9</u>	1314	72.8	1309	73.0	1	124	96.2	125	95.4	<u>125</u>	<u>95.8</u>		
437.leslie3d	8	<u>2869</u>	<u>26.2</u>	2871	26.2	2869	26.2	8	2815	26.7	<u>2815</u>	<u>26.7</u>	2814	26.7		
444.namd	8	537	120	538	119	<u>537</u>	<u>119</u>	8	<u>535</u>	<u>120</u>	535	120	535	120		
447.dealII	8	673	136	721	127	<u>673</u>	<u>136</u>	8	655	140	702	130	<u>675</u>	<u>136</u>		
450.soplex	8	1995	33.4	<u>1990</u>	<u>33.5</u>	1989	33.5	8	1807	36.9	<u>1806</u>	<u>36.9</u>	1781	37.5		
453.povray	8	224	190	226	189	<u>224</u>	<u>190</u>	8	<u>192</u>	<u>221</u>	192	221	193	220		
454.calculix	8	<u>573</u>	<u>115</u>	572	115	574	115	8	414	159	416	159	<u>415</u>	<u>159</u>		
459.GemsFDTD	8	3460	24.5	<u>3475</u>	<u>24.4</u>	3477	24.4	8	3345	25.4	3351	25.3	<u>3345</u>	<u>25.4</u>		
465.tonto	8	<u>668</u>	<u>118</u>	677	116	667	118	8	<u>660</u>	<u>119</u>	659	119	660	119		
470.lbm	8	4194	26.2	<u>4205</u>	<u>26.1</u>	4208	26.1	4	1906	28.8	1905	28.9	<u>1905</u>	<u>28.8</u>		
481.wrf	8	<u>1727</u>	<u>51.7</u>	1727	51.8	1728	51.7	8	1724	51.8	1725	51.8	<u>1724</u>	<u>51.8</u>		
482.sphinx3	8	<u>2847</u>	<u>54.8</u>	2862	54.5	2845	54.8	4	<u>827</u>	<u>94.3</u>	824	94.7	830	94.0		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
OMP_NUM_THREADS set to number of cores

Platform Notes

Bios settings:
Intel SpeedStep Technology: Disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5440,2.83GHz)

SPECfp_rate2006 = 71.2

SPECfp_rate_base2006 = 64.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode

The NEC Express5800/120Lj(Intel Xeon E5440) and the Bull NovaScale T860 E1(Intel Xeon E5440,2.83GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/120Lj(Intel Xeon E5440) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5440,2.83GHz)

SPECfp_rate2006 = 71.2

SPECfp_rate_base2006 = 64.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Base Optimization Flags (Continued)

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5440,2.83GHz)

SPECfp_rate2006 = 71.2

SPECfp_rate_base2006 = 64.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3
482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-
450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3
453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch
416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-
434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast
437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3
459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch
465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5440,2.83GHz)

SPECfp_rate2006 = 71.2

SPECfp_rate_base2006 = 64.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:34:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 June 2008.