



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 15.3

IBM System x3455 (AMD Opteron 2356)

SPECfp_base2006 = 13.6

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

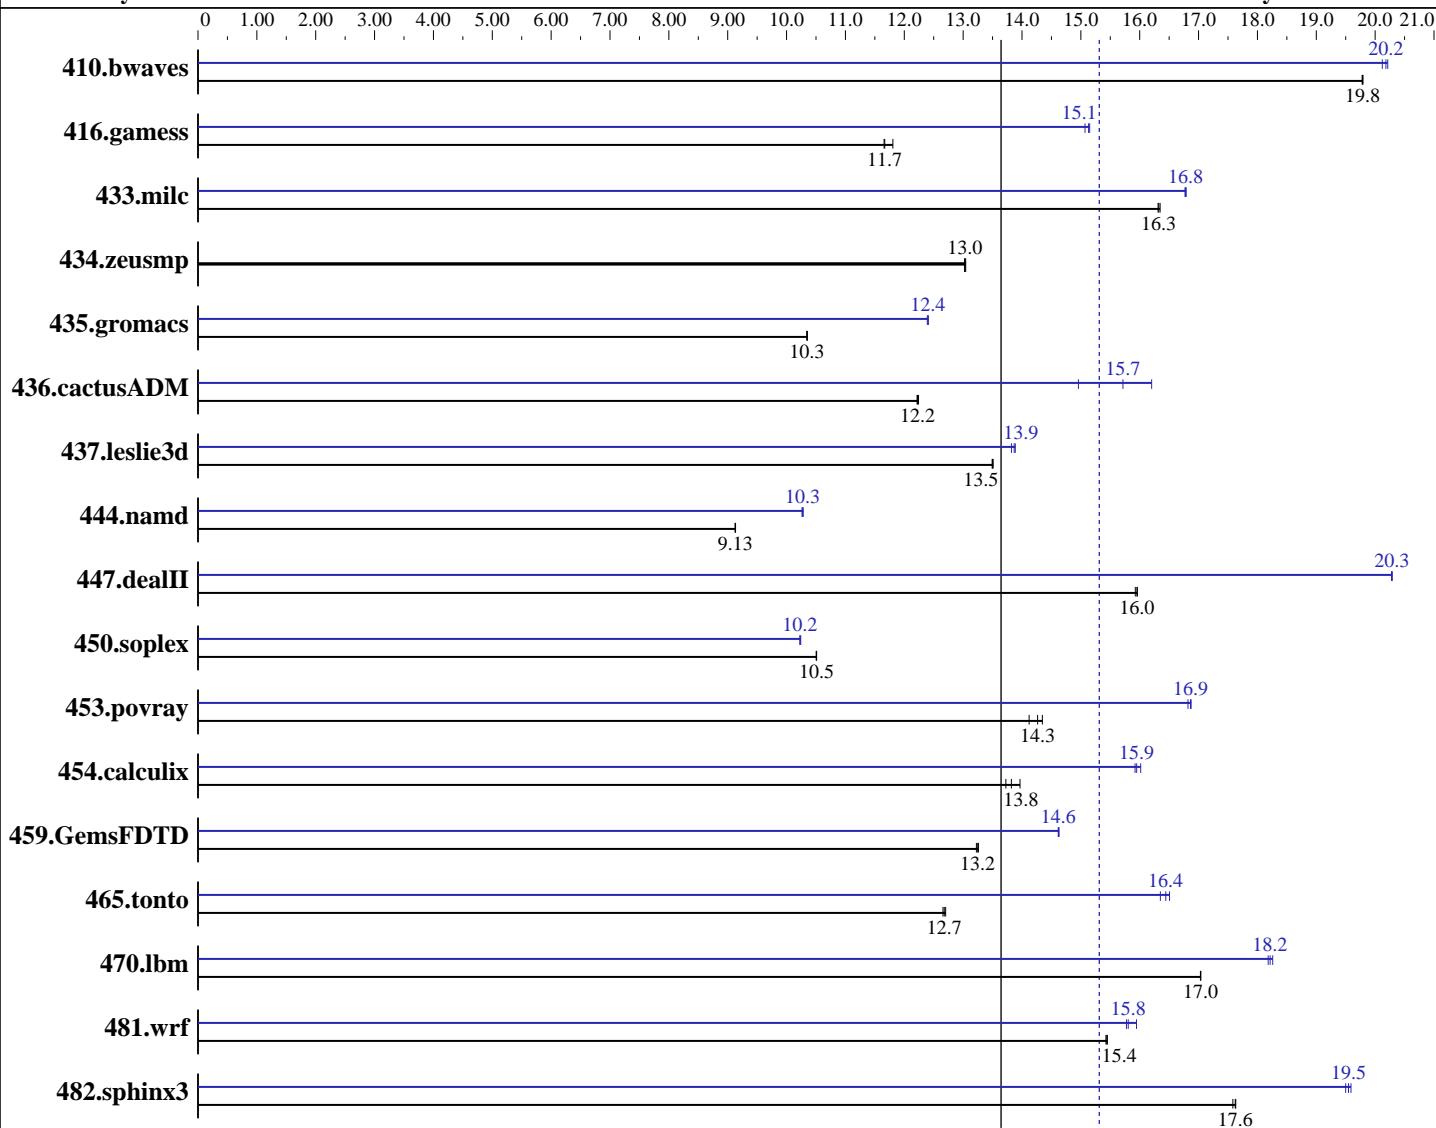

SPECfp_base2006 = 13.6

SPECfp2006 = 15.3

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	15.3
IBM System x3455 (AMD Opteron 2356)	SPECfp_base2006 =	13.6
CPU2006 license: 11	Test date:	Jun-2008
Test sponsor: IBM Corporation	Hardware Availability:	Jul-2008
Tested by: Advanced Micro Devices	Software Availability:	Jun-2008
L3 Cache: 2 MB I+D on chip per chip Other Cache: None Memory: 16 GB (8 x 2 GB, DDR2-667 CL5 Reg Dual Rank) Disk Subsystem: 1 x 160 GB SATA, 7200 RPM Other Hardware: None	Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	687	19.8	687	19.8	687	19.8	672	20.2	675	20.1	673	20.2
416.gamess	1658	11.8	1680	11.7	1678	11.7	1292	15.2	1294	15.1	1299	15.1
433.milc	562	16.3	563	16.3	562	16.3	547	16.8	547	16.8	547	16.8
434.zeusmp	698	13.0	699	13.0	698	13.0	698	13.0	699	13.0	698	13.0
435.gromacs	690	10.3	690	10.3	690	10.4	575	12.4	576	12.4	576	12.4
436.cactusADM	976	12.2	977	12.2	978	12.2	760	15.7	738	16.2	799	15.0
437.leslie3d	697	13.5	696	13.5	696	13.5	677	13.9	678	13.9	680	13.8
444.namd	879	9.13	879	9.13	878	9.13	781	10.3	780	10.3	782	10.3
447.dealII	717	16.0	718	15.9	717	16.0	564	20.3	564	20.3	564	20.3
450.soplex	793	10.5	794	10.5	794	10.5	814	10.2	815	10.2	815	10.2
453.povray	377	14.1	371	14.3	373	14.3	315	16.9	316	16.8	315	16.9
454.calculix	597	13.8	591	14.0	601	13.7	517	15.9	518	15.9	515	16.0
459.GemsFDTD	801	13.2	802	13.2	800	13.3	726	14.6	725	14.6	726	14.6
465.tonto	776	12.7	775	12.7	777	12.7	596	16.5	598	16.4	602	16.4
470.lbm	807	17.0	807	17.0	806	17.0	756	18.2	754	18.2	752	18.3
481.wrf	724	15.4	723	15.5	723	15.4	701	15.9	707	15.8	708	15.8
482.sphinx3	1106	17.6	1108	17.6	1105	17.6	995	19.6	1000	19.5	997	19.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Environment variable PGI_HUGE_PAGES set to 896
Set vm.nr_hugepages=1792 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
powersave -f was used to set the CPU frequency to its maximum.

Base Compiler Invocation

C benchmarks:
 pgcc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	15.3
IBM System x3455 (AMD Opteron 2356)	SPECfp_base2006 =	13.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-fastsse -Msmartralloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fastsse -Msmartralloc=huge:150 -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-fastsse -Mfprelaxed -Msmartralloc=huge:150 -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-fastsse -Msmartralloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 15.3

IBM System x3455 (AMD Opteron 2356)

SPECfp_base2006 = 13.6

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Base Other Flags

C benchmarks:

-Mipa=jobs : 4

C++ benchmarks:

-Mipa=jobs : 4

Fortran benchmarks:

-Mipa=jobs : 4

Benchmarks using both Fortran and C:

-Mipa=jobs : 4

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

470.lbm: pathcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pgf95

416.gamess: pathf95

459.GemsFDTD: pathf95

465.tonto: pathf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -Mnomain

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	15.3
IBM System x3455 (AMD Opteron 2356)	SPECfp_base2006 =	13.6
CPU2006 license: 11	Test date:	Jun-2008
Test sponsor: IBM Corporation	Hardware Availability:	Jul-2008
Tested by: Advanced Micro Devices	Software Availability:	Jun-2008

Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
  -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
  -tp barcelona-64 -Bstatic_pgi

470.lbm: -march=barcelona -Ofast -CG:sse_cse_regs=0
  -CG:locs_shallow_depth=1 -m3dnow

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
  -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
  -Mfprelaxed -Msmartalloc -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
  -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
  -Msmartalloc=huge:150 -Mnodepchk -Mfprelaxed --zc_eh
  -tp barcelona-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
  -fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -O3 -TENV:frame_pointer=off
  -LNO:prefetch=1 -OPT:malloc_alg=1 -CG:load_exe=0 -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast

```

Fortran benchmarks:

```

410.bwaves: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
  -Mipa=inline(pass 2) -fastsse -Msmartalloc
  -Mprefetch=distance:12 -Mprefetch=nta -Mpre -Mfprelaxed
  -tp barcelona-64 -Bstatic_pgi

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 15.3

IBM System x3455 (AMD Opteron 2356)

SPECfp_base2006 = 13.6

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
 -OPT:unroll_size=256

434.zeusmp: basepeak = yes

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
 -Mvect=fuse -Msmaralloc=huge:150 -Mprefetch=distance:8
 -Mprefetch=t0 -Mfrelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
 -LNO:prefetch_ahead=1 -CG:load_exe=0

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
 -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmaralloc=huge:150 -Mfrelaxed -Mfpapprox=rsqrt
 -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
 -Msmaralloc=huge:150 -Mprefetch=t0 -Mpre -Mfrelaxed
 -tp barcelona-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmaralloc
 -Mprefetch=distance:8 -Mfrelaxed -tp barcelona-64
 -Bstatic_pgi

Peak Other Flags

C benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

470.lbm: No flags used

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 15.3

IBM System x3455 (AMD Opteron 2356)

SPECfp_base2006 = 13.6

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Other Flags (Continued)

Fortran benchmarks (except as noted below):

-Mipa=jobs : 4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs : 4(pass 2)

436.cactusADM: No flags used

481.wrf: No flags used

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Sep 13 11:32:07 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 July 2008.