



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260+  
(Intel Xeon E5440, 2.83 GHz)

**SPECint®\_rate2006 = 125**

**SPECint\_rate\_base2006 = 102**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

**Test date:** Jul-2008

**Hardware Availability:** Jan-2008

**Software Availability:** Nov-2007

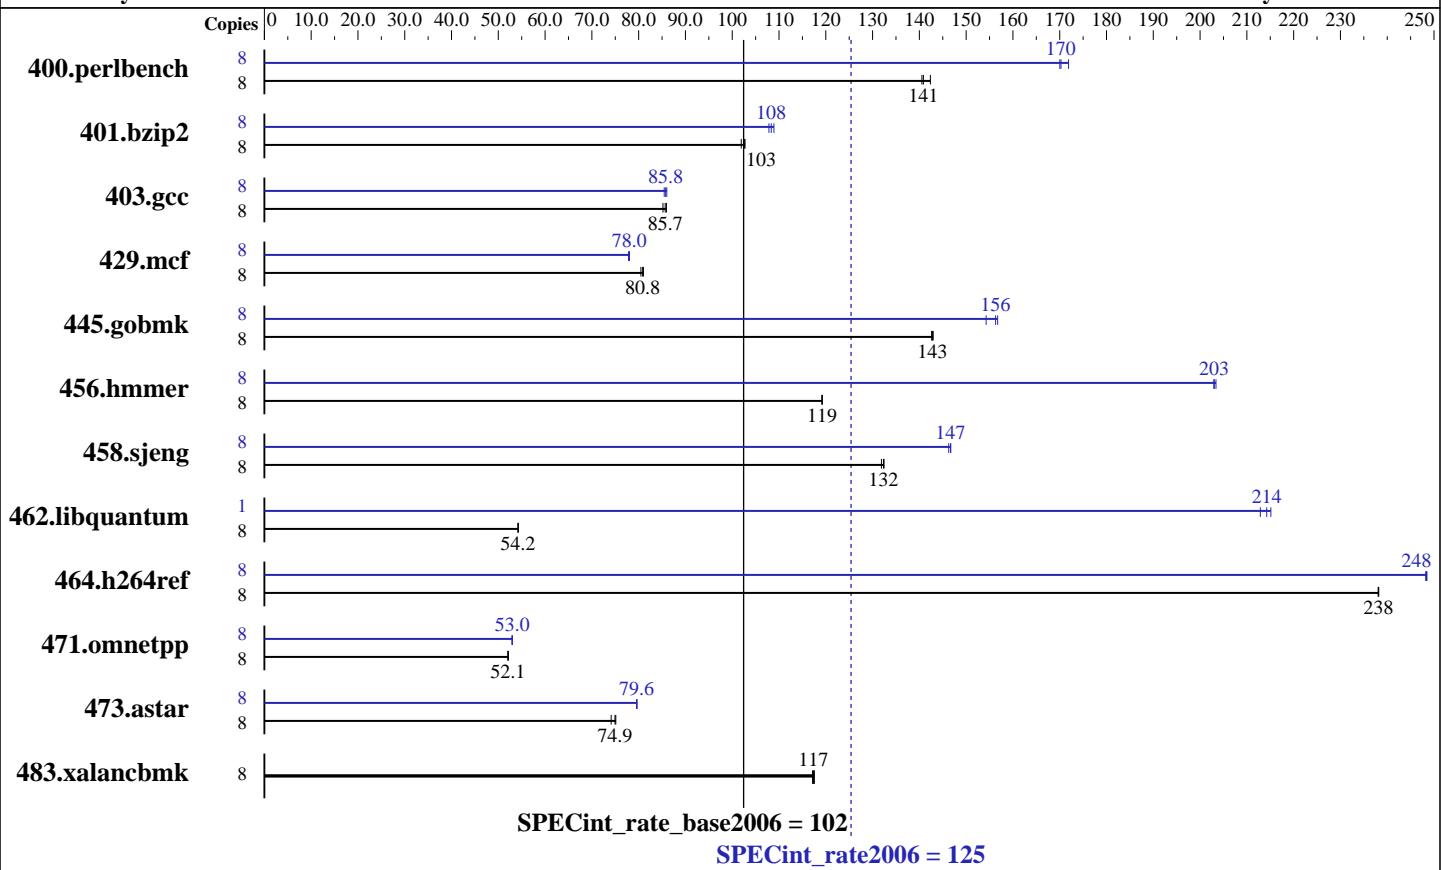

### Hardware

CPU Name:	Intel Xeon E5440
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2833
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem:	1x73 GB SAS, 10000 RPM
Other Hardware:	None

### Software

Operating System:	SUSE LINUX Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: 1_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Binutils 2.17.50.0.15 SmartHeap library V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260+  
(Intel Xeon E5440, 2.83 GHz)

**SPECint\_rate2006 = 125**

**SPECint\_rate\_base2006 = 102**

CPU2006 license: 20

Test date: Jul-2008

Test sponsor: Bull SAS

Hardware Availability: Jan-2008

Tested by: Bull SAS

Software Availability: Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	549	142	<b>555</b>	<b>141</b>	556	141	8	455	172	<b>459</b>	<b>170</b>	460	170
401.bzip2	8	<b>752</b>	<b>103</b>	752	103	757	102	8	716	108	709	109	<b>713</b>	<b>108</b>
403.gcc	8	<b>752</b>	<b>85.7</b>	756	85.2	749	85.9	8	754	85.5	<b>751</b>	<b>85.8</b>	749	86.0
429.mcf	8	901	81.0	<b>902</b>	<b>80.8</b>	907	80.5	8	935	78.0	<b>935</b>	<b>78.0</b>	937	77.8
445.gobmk	8	<b>588</b>	<b>143</b>	588	143	587	143	8	535	157	544	154	<b>537</b>	<b>156</b>
456.hammer	8	626	119	626	119	<b>626</b>	<b>119</b>	8	367	203	<b>368</b>	<b>203</b>	368	203
458.sjeng	8	734	132	731	132	<b>732</b>	<b>132</b>	8	662	146	<b>660</b>	<b>147</b>	660	147
462.libquantum	8	3057	54.2	3055	54.3	<b>3057</b>	<b>54.2</b>	1	<b>96.7</b>	<b>214</b>	97.3	213	96.3	215
464.h264ref	8	743	238	744	238	<b>743</b>	<b>238</b>	8	<b>713</b>	<b>248</b>	713	248	712	248
471.omnetpp	8	960	52.1	<b>960</b>	<b>52.1</b>	959	52.1	8	<b>944</b>	<b>53.0</b>	944	53.0	944	53.0
473.astar	8	<b>749</b>	<b>74.9</b>	758	74.1	748	75.1	8	<b>706</b>	<b>79.6</b>	705	79.7	706	79.6
483.xalancbmk	8	471	117	<b>470</b>	<b>117</b>	470	118	8	471	117	<b>470</b>	<b>117</b>	470	118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 64M

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer,  
for peak, are compiled in 64-bit mode

BIOS settings :

Hardware Prefetcher :	Enabled
Adjacent Cache-Line Prefetch :	Disabled

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260+  
(Intel Xeon E5440, 2.83 GHz)

**SPECint\_rate2006 = 125**

**SPECint\_rate\_base2006 = 102**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Jul-2008

**Hardware Availability:** Jan-2008

**Software Availability:** Nov-2007

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/cpu2006/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

456.hmmr: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260+  
(Intel Xeon E5440, 2.83 GHz)

**SPECint\_rate2006 = 125**

**SPECint\_rate\_base2006 = 102**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jul-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmr: -fast -unroll12 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll14 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260+  
(Intel Xeon E5440, 2.83 GHz)

**SPECint\_rate2006 = 125**

**SPECint\_rate\_base2006 = 102**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Jul-2008

**Hardware Availability:** Jan-2008

**Software Availability:** Nov-2007

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel101\\_int\\_flags.20090713.00.html](http://www.spec.org/cpu2006/flags/EM64T_Intel101_int_flags.20090713.00.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel101\\_int\\_flags.20090713.00.xml](http://www.spec.org/cpu2006/flags/EM64T_Intel101_int_flags.20090713.00.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 19:02:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 September 2008.