




SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp®2006 = 19.7

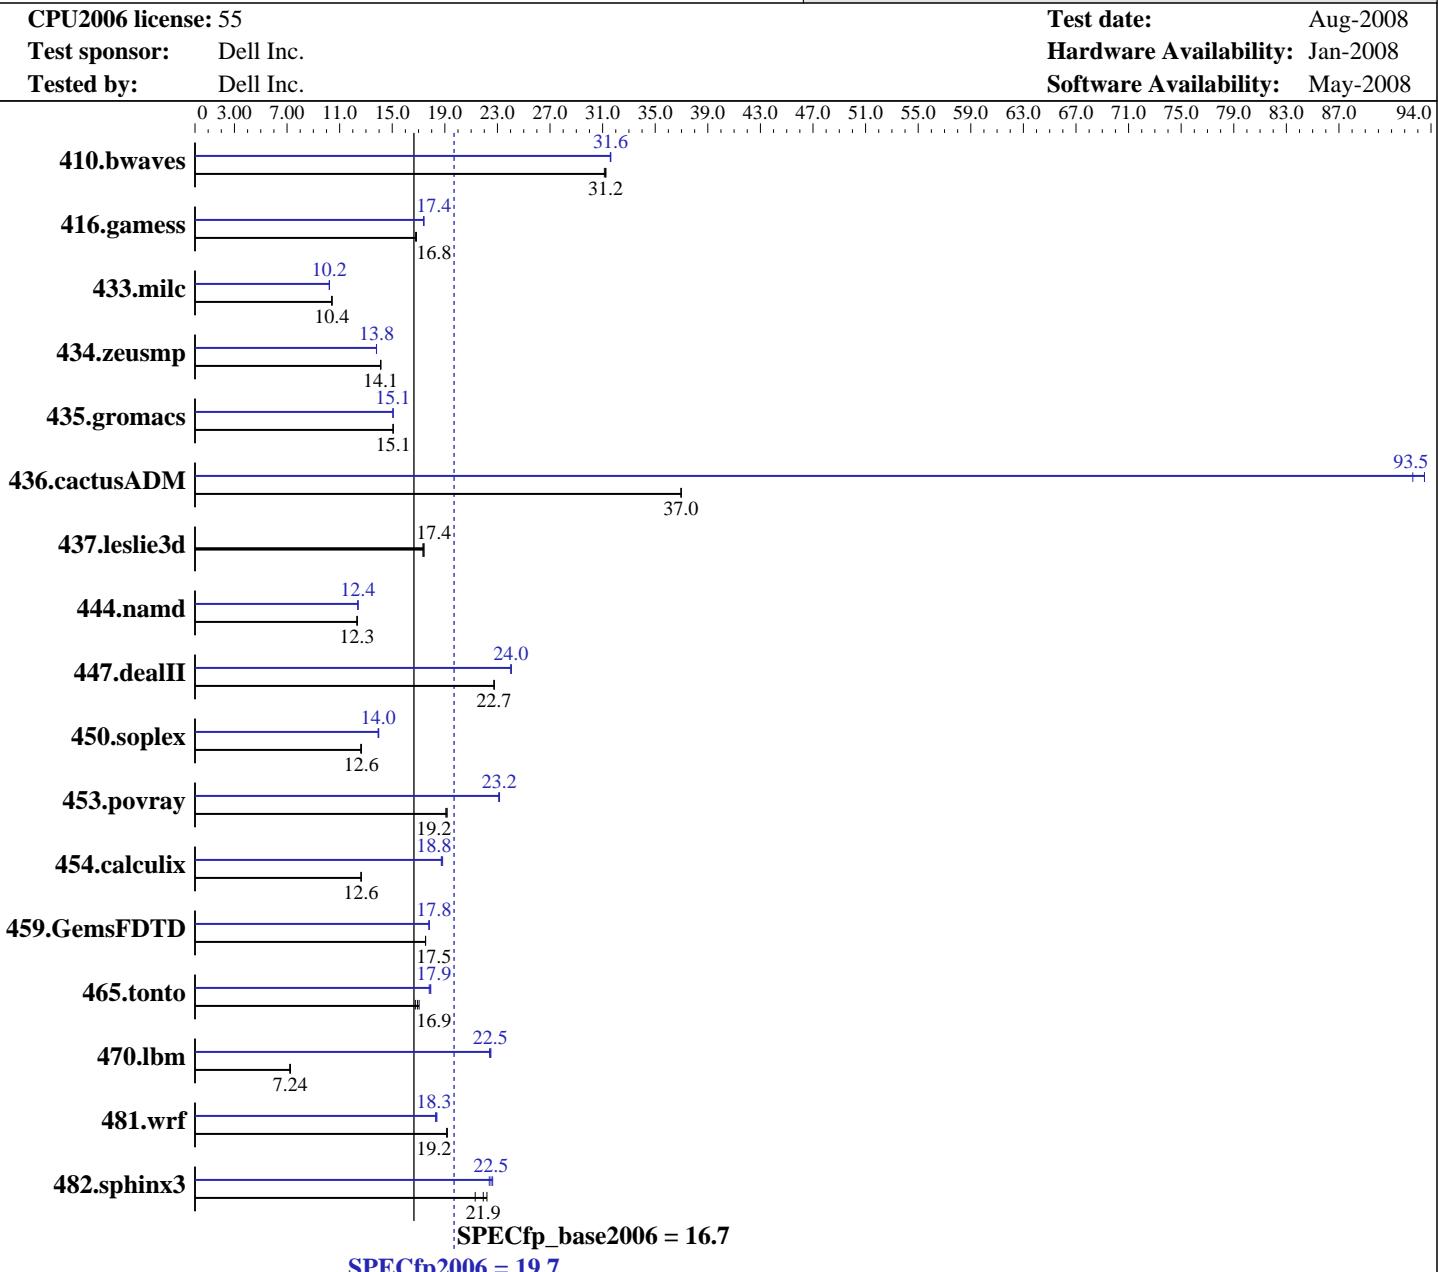

Hardware		Software	
CPU Name:	Intel Xeon E5410	Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
CPU Characteristics:	2333	Compiler:	Intel C++ and Fortran Compiler 10.1 for Linux Build 20080312 Package ID: 1_cc_p_10.1.015, 1_fc_p_10.1.015
CPU MHz:	2333	Auto Parallel:	Yes
FPU:	Integrated	File System:	ReiserFS
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1,2 chips	Base Pointers:	64-bit
Primary Cache:	32 KB I + 32 KB D on chip per core		
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores		

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 19.7

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp_base2006 = 16.7

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB 667 MHz ECC CL5 FB-DIMM)
 Disk Subsystem: 1 x 80 GB 5400 RPM SATA
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	435	31.2	437	31.1	435	31.2	430	31.6	430	31.6	430	31.6
416.gamess	1164	16.8	1167	16.8	1163	16.8	1125	17.4	1125	17.4	1127	17.4
433.milc	881	10.4	883	10.4	881	10.4	898	10.2	899	10.2	898	10.2
434.zeusmp	644	14.1	644	14.1	644	14.1	659	13.8	659	13.8	659	13.8
435.gromacs	474	15.1	474	15.1	474	15.1	474	15.1	474	15.1	474	15.1
436.cactusADM	323	37.0	323	37.0	323	37.0	128	93.5	128	93.5	129	92.6
437.leslie3d	540	17.4	540	17.4	542	17.3	540	17.4	540	17.4	542	17.3
444.namd	651	12.3	651	12.3	650	12.3	647	12.4	648	12.4	647	12.4
447.dealII	503	22.8	503	22.7	503	22.7	476	24.0	475	24.1	476	24.0
450.soplex	659	12.7	660	12.6	662	12.6	598	14.0	599	13.9	597	14.0
453.povray	278	19.2	278	19.2	279	19.1	230	23.1	230	23.2	230	23.2
454.calculix	653	12.6	653	12.6	652	12.6	438	18.8	440	18.7	439	18.8
459.GemsFDTD	605	17.5	605	17.5	605	17.5	596	17.8	596	17.8	596	17.8
465.tonto	577	17.0	587	16.8	582	16.9	549	17.9	550	17.9	552	17.8
470.lbm	1892	7.26	1897	7.24	1907	7.21	612	22.5	613	22.4	611	22.5
481.wrf	582	19.2	582	19.2	583	19.1	610	18.3	609	18.3	607	18.4
482.sphinx3	915	21.3	878	22.2	889	21.9	866	22.5	861	22.6	871	22.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

General Notes

All benchmarks compiled in 64-bit mode except 450.soplex,
 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
 OMP_NUM_THREADS set to number of processors
 KMP_AFFINITY set to "physical,0"
 KMP_STACKSIZE set to 200M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp2006 =

19.7

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date:

Aug-2008

Hardware Availability: Jan-2008

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp2006 =

19.7

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date:

Aug-2008

Hardware Availability: Jan-2008

Software Availability: May-2008

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.015/bin/icc -L/opt/intel/cc/10.1.015/lib  
-I/opt/intel/cc/10.1.015/include
```

433.milc: icc

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.015/bin/icpc -L/opt/intel/cc/10.1.015/lib  
-I/opt/intel/cc/10.1.015/include
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icc ifort
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
    433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-scalar-rep -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp2006 =

19.7

SPECfp_base2006 =

16.7

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date:

Aug-2008

Hardware Availability: Jan-2008

Software Availability: May-2008

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revD.20090713.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 19.7

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp_base2006 = 16.7

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revD.20090713.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 19:13:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 September 2008.