



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 91.6**

PowerEdge M805 (AMD Opteron 2350, 2.0 GHz)

**SPECint\_rate\_base2006 = 79.6**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2008

Hardware Availability: Aug-2008

Software Availability: May-2008

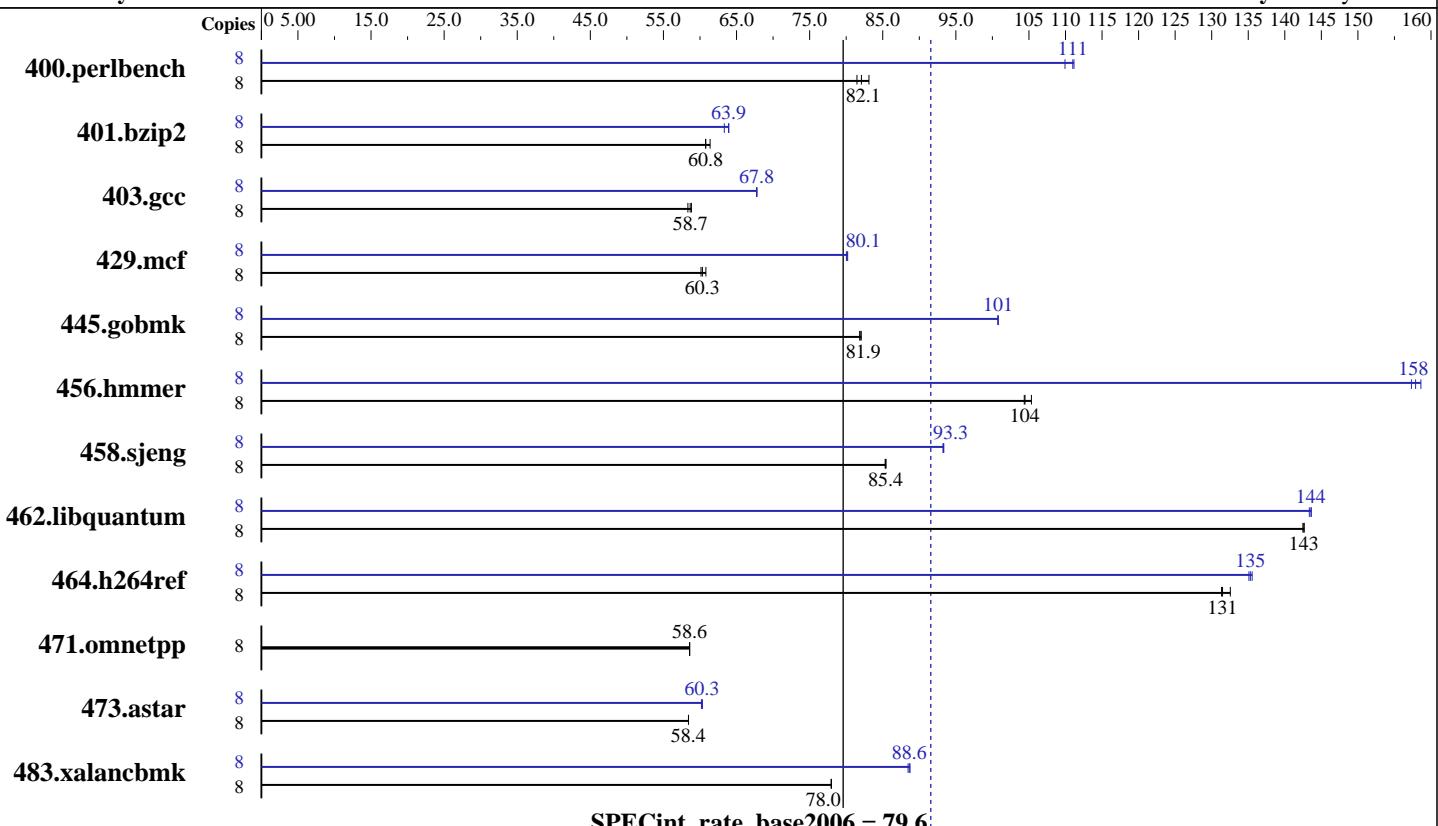

## Hardware

CPU Name:	AMD Opteron 2350
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (8x2GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem:	1 x 73 SATA 15000 RPM
Other Hardware:	None

## Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
Compiler:	PGI Server Complete Version 7.2
	PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 91.6**

PowerEdge M805 (AMD Opteron 2350, 2.0 GHz)

**SPECint\_rate\_base2006 = 79.6**

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>952</b>	<b>82.1</b>	959	81.5	940	83.1	8	711	110	<b>704</b>	<b>111</b>	703	111
401.bzip2	8	1258	61.4	<b>1270</b>	<b>60.8</b>	1271	60.8	8	1219	63.3	<b>1208</b>	<b>63.9</b>	1207	64.0
403.gcc	8	1095	58.8	<b>1098</b>	<b>58.7</b>	1104	58.3	8	950	67.8	<b>950</b>	<b>67.8</b>	951	67.7
429.mcf	8	1200	60.8	1213	60.1	<b>1209</b>	<b>60.3</b>	8	912	80.0	910	80.2	<b>911</b>	<b>80.1</b>
445.gobmk	8	<b>1025</b>	<b>81.9</b>	1025	81.8	1023	82.1	8	833	101	<b>833</b>	<b>101</b>	833	101
456.hmmer	8	<b>715</b>	<b>104</b>	715	104	709	105	8	474	157	471	159	<b>473</b>	<b>158</b>
458.sjeng	8	1133	85.5	1134	85.3	<b>1134</b>	<b>85.4</b>	8	1037	93.4	<b>1037</b>	<b>93.3</b>	1038	93.2
462.libquantum	8	<b>1162</b>	<b>143</b>	1163	142	1162	143	8	<b>1154</b>	<b>144</b>	1154	144	1156	143
464.h264ref	8	1348	131	<b>1346</b>	<b>131</b>	1336	133	8	1311	135	1306	136	<b>1309</b>	<b>135</b>
471.omnetpp	8	<b>854</b>	<b>58.6</b>	853	58.6	854	58.6	8	<b>854</b>	<b>58.6</b>	853	58.6	854	58.6
473.astar	8	961	58.4	<b>961</b>	<b>58.4</b>	961	58.4	8	931	60.3	933	60.2	<b>932</b>	<b>60.3</b>
483.xalancbmk	8	708	78.0	708	77.9	<b>708</b>	<b>78.0</b>	8	624	88.5	622	88.7	<b>623</b>	<b>88.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'numactl' was used to bind copies to the cores

Environment variable PGI\_HUGE\_PAGES set to 150

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2457600' was used to set environment locked pages in memory quantity

Set vm.nr\_hugepages = 1200 in /etc/sysctl.conf

mount -t hugetlbfs nodev /mnt/hugepages

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 91.6**

PowerEdge M805 (AMD Opteron 2350, 2.0 GHz)

**SPECint\_rate\_base2006 = 79.6**

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmaralloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmaralloc=huge:150  
--zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w -Mipa=jobs:4

C++ benchmarks:

-w -Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 91.6**

PowerEdge M805 (AMD Opteron 2350, 2.0 GHz)

**SPECint\_rate\_base2006 = 79.6**

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
  -WOPT;if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
  -Msmaralloc=huge:150 -Mnounroll -tp barcelona-64
  -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa:inline:1 -Msmaralloc=huge:150
  -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
  -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmaralloc=huge:150 -Mfprelaxed
  -Mvect=partial -Msafepr -Mipa=const -Mipa=ptr -Mipa=arg
  -Mipa:inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa:inline:1(pass 2)
  -Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
  -Msmaralloc=huge:150 -Mfprelaxed -tp barcelona-64
  -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmaralloc=huge:150 -Munroll=m:8
  -Mipa=fast -Mipa:inline -Mipa=noarg -tp barcelona-64
  -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
  -Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
  -Msmaralloc=huge:150 -Mfprelaxed -tp barcelona-64
  -Bstatic_pgi
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 91.6**

PowerEdge M805 (AMD Opteron 2350, 2.0 GHz)

**SPECint\_rate\_base2006 = 79.6**

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame\_pointer=off  
-WOPT;if\_conv=0 -GRA:optimize\_boundary=on -IPA:plimit=525  
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0  
-lsmartheap

## Peak Other Flags

C benchmarks (except as noted below):

-w -Mipa=jobs:4(pass 2)

400.perlbench: No flags used

401.bzip2: -w

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.

Report generated on Tue Jul 22 19:34:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 September 2008.