



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B140a-T  
(Intel Xeon E7220)

**SPECint®2006 = 24.8**

**SPECint\_base2006 = 21.8**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

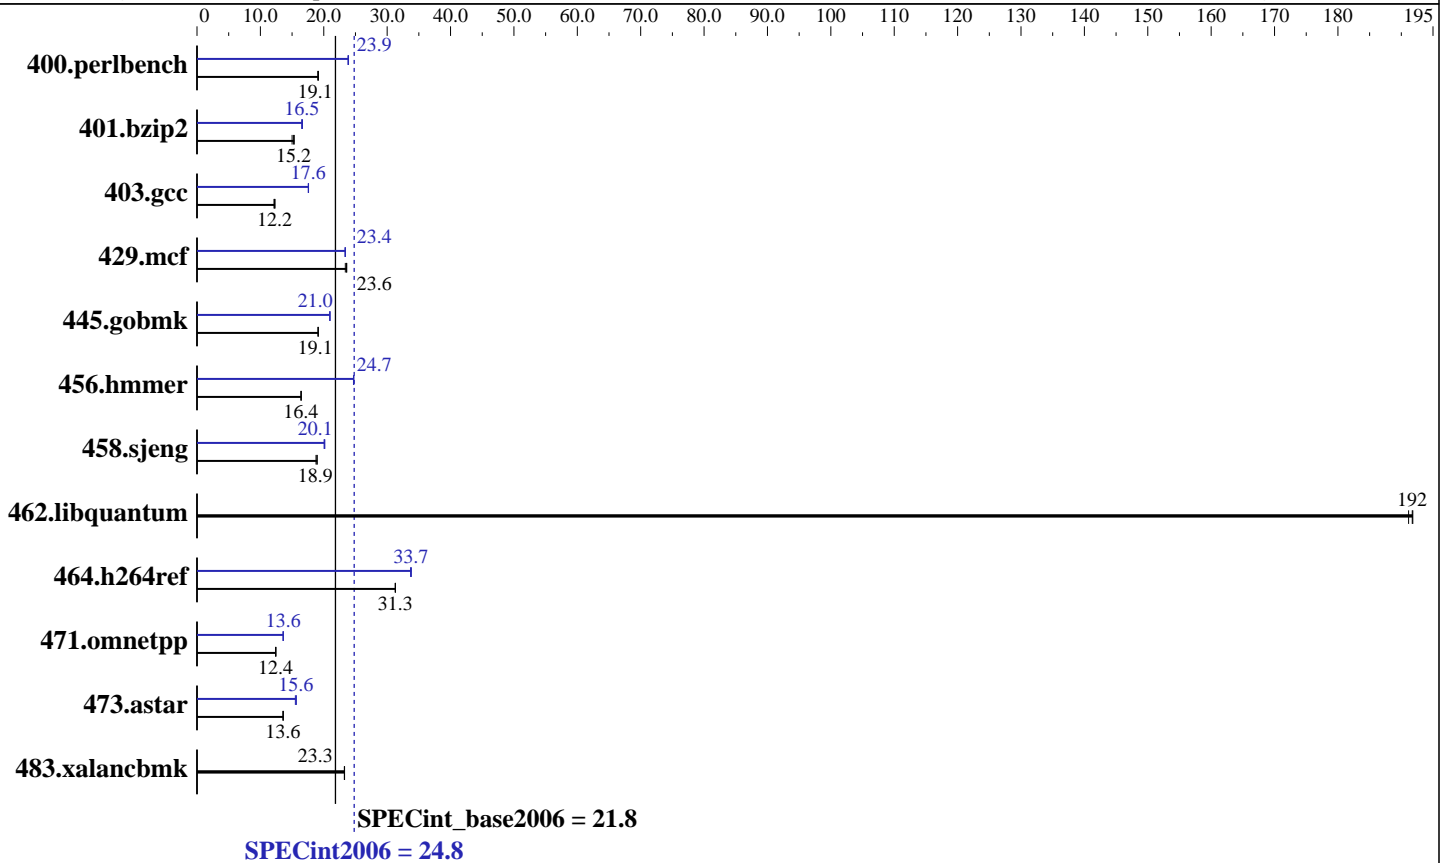

### Hardware

CPU Name: Intel Xeon E7220  
 CPU Characteristics: 1066 MHz system bus  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per core  
 L3 Cache: None  
 Other Cache: None  
 Memory: 32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
 Disk Subsystem: 1x146.5 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20081105 Package ID: l\_cproc\_p\_11.0.074  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B140a-T  
(Intel Xeon E7220)

SPECint2006 = 24.8

SPECint\_base2006 = 21.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	513	19.1	510	19.2	<u>511</u>	<u>19.1</u>	410	23.8	409	23.9	<u>409</u>	<u>23.9</u>
401.bzip2	643	15.0	629	15.3	<u>633</u>	<u>15.2</u>	583	16.5	580	16.6	<u>583</u>	<u>16.5</u>
403.gcc	654	12.3	<u>658</u>	<u>12.2</u>	663	12.1	<u>458</u>	<u>17.6</u>	457	17.6	458	17.6
429.mcf	390	23.4	<u>387</u>	<u>23.6</u>	386	23.6	391	23.4	390	23.4	<u>390</u>	<u>23.4</u>
445.gobmk	<u>549</u>	<u>19.1</u>	549	19.1	549	19.1	500	21.0	<u>500</u>	<u>21.0</u>	500	21.0
456.hammer	569	16.4	568	16.4	<u>568</u>	<u>16.4</u>	<u>378</u>	<u>24.7</u>	377	24.8	378	24.7
458.sjeng	639	18.9	644	18.8	<u>639</u>	<u>18.9</u>	603	20.1	600	20.2	<u>602</u>	<u>20.1</u>
462.libquantum	108	192	108	191	<u>108</u>	<u>192</u>	108	192	108	191	<u>108</u>	<u>192</u>
464.h264ref	<u>707</u>	<u>31.3</u>	707	31.3	707	31.3	654	33.8	<u>656</u>	<u>33.7</u>	657	33.7
471.omnetpp	502	12.4	504	12.4	<u>503</u>	<u>12.4</u>	459	13.6	460	13.6	<u>459</u>	<u>13.6</u>
473.astar	516	13.6	517	13.6	<u>516</u>	<u>13.6</u>	448	15.7	<u>449</u>	<u>15.6</u>	452	15.5
483.xalancbmk	297	23.3	<u>297</u>	<u>23.3</u>	296	23.3	297	23.3	<u>297</u>	<u>23.3</u>	296	23.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to "physical,0"

## Platform Notes

Bios settings:  
Hardware Prefetcher: Enabled  
Adjacent Cache Line Prefetch: Enabled

## Base Compiler Invocation

C benchmarks:  
icc  
  
C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/B140a-T  
(Intel Xeon E7220)

**SPECint2006 = 24.8**

**SPECint\_base2006 = 21.8**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Mar-2009

**Hardware Availability:** Feb-2009

**Software Availability:** Nov-2008

## Base Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/074/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/074/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/B140a-T  
(Intel Xeon E7220)

**SPECint2006 = 24.8**

**SPECint\_base2006 = 21.8**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Mar-2009

**Hardware Availability:** Feb-2009

**Software Availability:** Nov-2008

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -auto-ilp32 -opt-prefetch  
-ansi-alias

403.gcc: -xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3

429.mcf: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B140a-T  
(Intel Xeon E7220)

**SPECint2006 = 24.8**

**SPECint\_base2006 = 21.8**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Mar-2009

**Hardware Availability:** Feb-2009

**Software Availability:** Nov-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 01:44:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 April 2009.