



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.  
NTT Business W 907G

SPECint®2006 = 17.7  
SPECint\_base2006 = 16.2

CPU2006 license: 9013


Test sponsor: NTT System S. A.

Tested by: NTT System S. A.

Test date: Jul-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2009

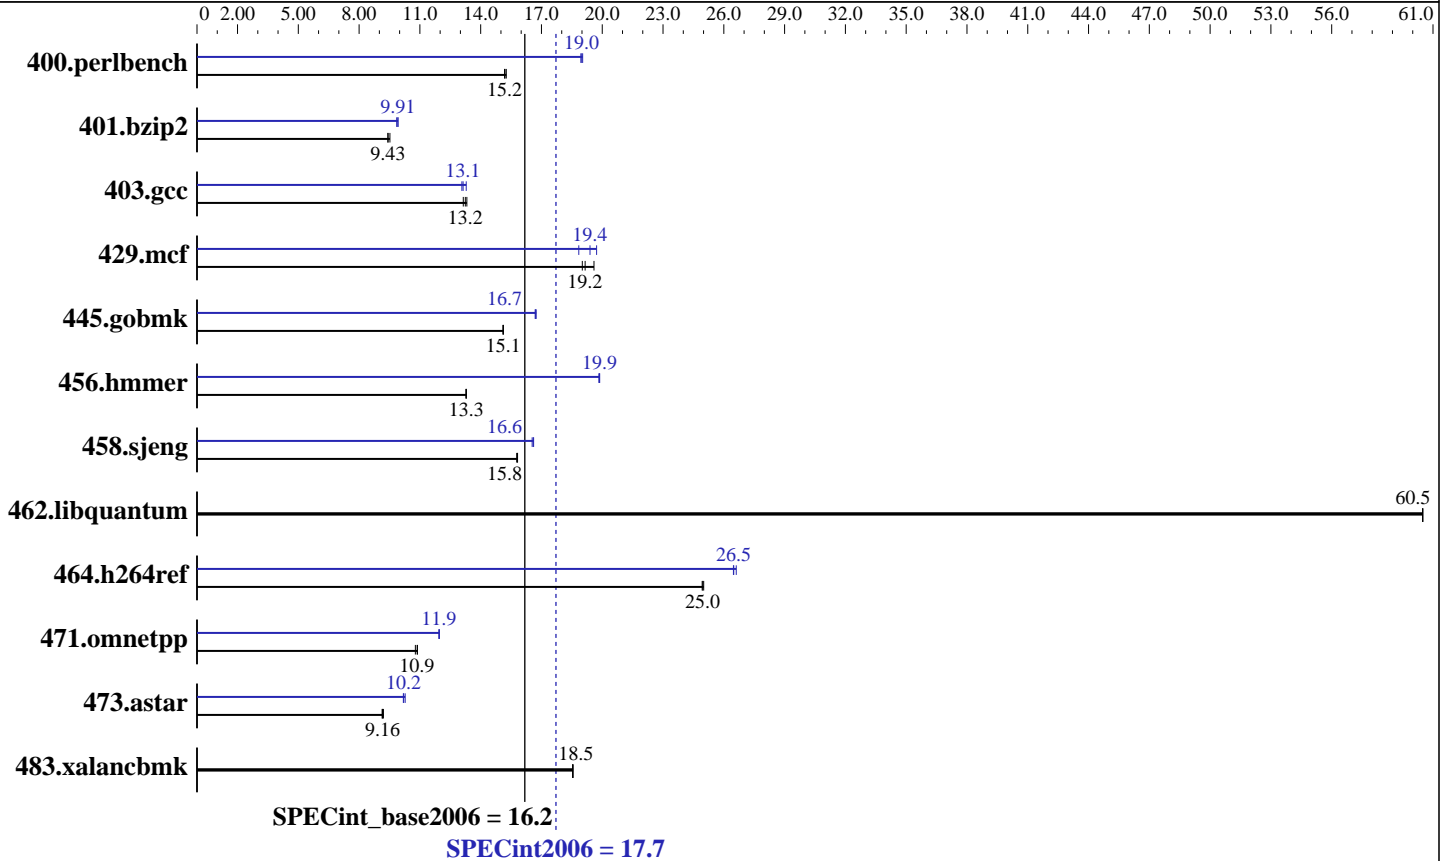

## Hardware

CPU Name: Intel Celeron E3200  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 4 GB (2x2GB) DDR2 800Mhz  
 Disk Subsystem: 250 GB SATA, 7200RPM  
 Other Hardware: None

## Software

Operating System: SuSe Linux SLES10 SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux  
 Build 20080930 Package ID: l\_cproc\_p\_11.0.066  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.  
NTT Business W 907G

SPECint2006 = 17.7  
SPECint\_base2006 = 16.2

CPU2006 license: 9013  
Test sponsor: NTT System S. A.  
Tested by: NTT System S. A.

Test date: Jul-2009  
Hardware Availability: Jul-2009  
Software Availability: Nov-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>643</b>	<b>15.2</b>	640	15.3	644	15.2	516	18.9	513	19.0	<b>515</b>	<b>19.0</b>
401.bzip2	<b>1023</b>	<b>9.43</b>	1025	9.42	1014	9.52	979	9.85	<b>974</b>	<b>9.91</b>	973	9.92
403.gcc	<b>608</b>	<b>13.2</b>	604	13.3	613	13.1	616	13.1	<b>613</b>	<b>13.1</b>	606	13.3
429.mcf	480	19.0	<b>476</b>	<b>19.2</b>	465	19.6	<b>470</b>	<b>19.4</b>	462	19.7	484	18.8
445.gobmk	<b>694</b>	<b>15.1</b>	694	15.1	695	15.1	<b>628</b>	<b>16.7</b>	628	16.7	627	16.7
456.hammer	703	13.3	<b>702</b>	<b>13.3</b>	702	13.3	470	19.9	<b>470</b>	<b>19.9</b>	470	19.8
458.sjeng	765	15.8	767	15.8	<b>765</b>	<b>15.8</b>	728	16.6	732	16.5	<b>729</b>	<b>16.6</b>
462.libquantum	343	60.5	343	60.5	<b>343</b>	<b>60.5</b>	343	60.5	343	60.5	<b>343</b>	<b>60.5</b>
464.h264ref	888	24.9	885	25.0	<b>887</b>	<b>25.0</b>	836	26.5	832	26.6	<b>835</b>	<b>26.5</b>
471.omnetpp	574	10.9	<b>575</b>	<b>10.9</b>	580	10.8	<b>523</b>	<b>11.9</b>	523	11.9	523	12.0
473.astar	768	9.14	763	9.20	<b>767</b>	<b>9.16</b>	689	10.2	683	10.3	<b>688</b>	<b>10.2</b>
483.xalancbmk	<b>372</b>	<b>18.5</b>	372	18.5	372	18.6	<b>372</b>	<b>18.5</b>	372	18.5	372	18.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECint2006 = 17.7

NTT Business W 907G

SPECint\_base2006 = 16.2

CPU2006 license: 9013

Test date: Jul-2009

Test sponsor: NTT System S. A.

Hardware Availability: Jul-2009

Tested by: NTT System S. A.

Software Availability: Nov-2009

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -auto-ilp32 -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.  
NTT Business W 907G

SPECint2006 = 17.7  
SPECint\_base2006 = 16.2

CPU2006 license: 9013

Test sponsor: NTT System S. A.

Tested by: NTT System S. A.

Test date: Jul-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2009

## Peak Optimization Flags (Continued)

403.gcc: -xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3

429.mcf: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.00.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.  
NTT Business W 907G

SPECint2006 = 17.7  
SPECint\_base2006 = 16.2

CPU2006 license: 9013  
Test sponsor: NTT System S. A.  
Tested by: NTT System S. A.

Test date: Jul-2009  
Hardware Availability: Jul-2009  
Software Availability: Nov-2009

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:13:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 August 2009.