



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECint®2006 = 21.3**

PRIMERGY TX300 S5, Intel Xeon E5504, 2.0 GHz

**SPECint\_base2006 = 19.2**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

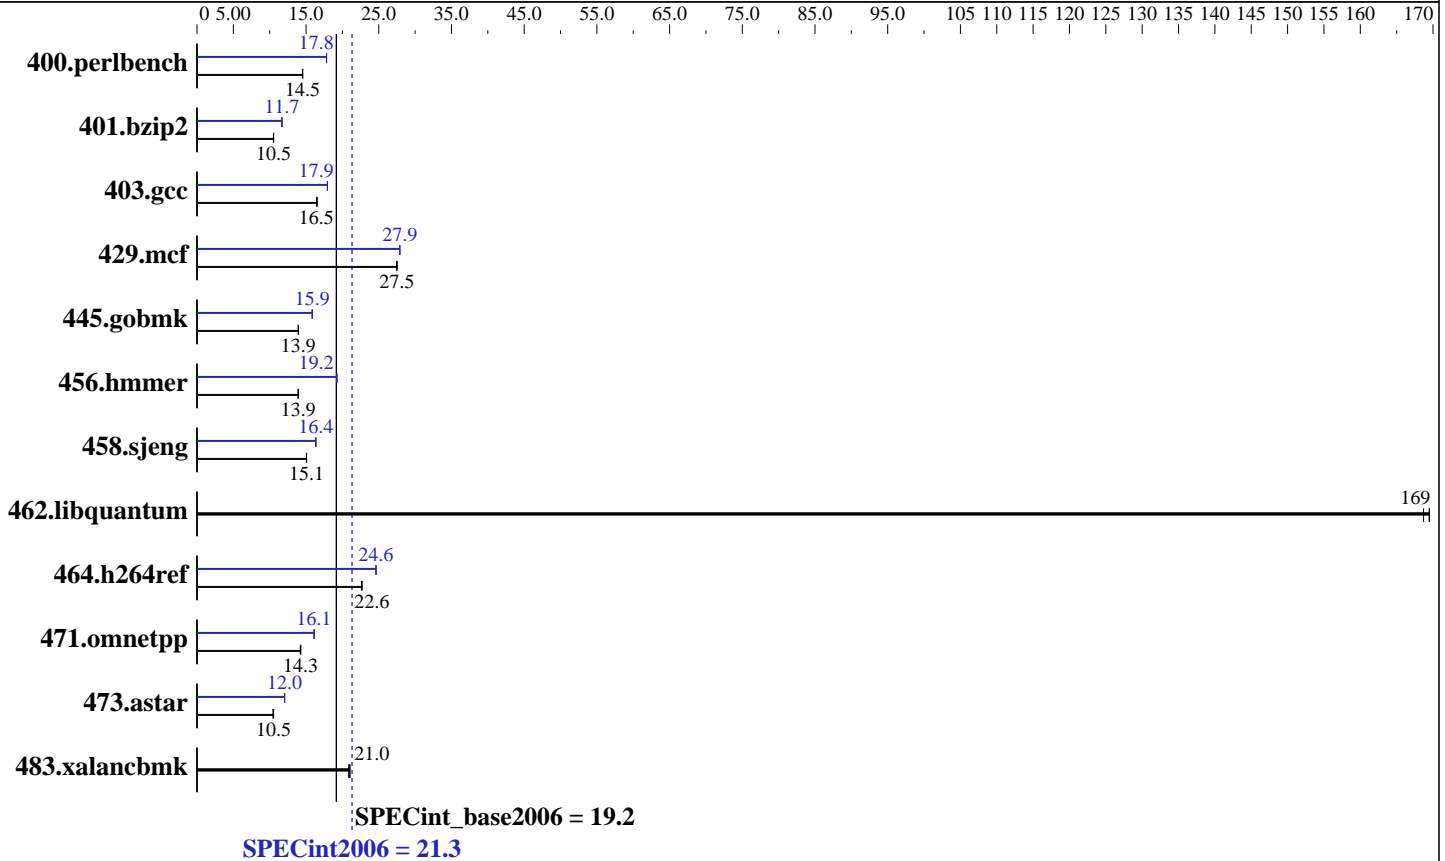

### Hardware

CPU Name: Intel Xeon E5504  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 72 GB (18x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
 Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Multi-User Run Level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 21.3

PRIMERGY TX300 S5, Intel Xeon E5504, 2.0 GHz

SPECint\_base2006 = 19.2

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	674	14.5	672	14.5	<b><u>673</u></b>	<b><u>14.5</u></b>	548	17.8	<b><u>548</u></b>	<b><u>17.8</u></b>	549	17.8
401.bzip2	917	10.5	916	10.5	<b><u>916</u></b>	<b><u>10.5</u></b>	827	11.7	825	11.7	<b><u>825</u></b>	<b><u>11.7</u></b>
403.gcc	489	16.4	487	16.5	<b><u>488</u></b>	<b><u>16.5</u></b>	449	17.9	<b><u>449</u></b>	<b><u>17.9</u></b>	448	18.0
429.mcf	331	27.5	332	27.4	<b><u>331</u></b>	<b><u>27.5</u></b>	327	27.9	<b><u>327</u></b>	<b><u>27.9</u></b>	327	27.9
445.gobmk	752	13.9	<b><u>752</u></b>	<b><u>13.9</u></b>	753	13.9	<b><u>662</u></b>	<b><u>15.9</u></b>	662	15.8	662	15.9
456.hammer	670	13.9	<b><u>670</u></b>	<b><u>13.9</u></b>	669	13.9	485	19.2	<b><u>485</u></b>	<b><u>19.2</u></b>	485	19.2
458.sjeng	<b><u>803</u></b>	<b><u>15.1</u></b>	804	15.1	803	15.1	741	16.3	<b><u>740</u></b>	<b><u>16.4</u></b>	740	16.4
462.libquantum	123	169	122	170	<b><u>122</u></b>	<b><u>169</u></b>	123	169	122	170	<b><u>122</u></b>	<b><u>169</u></b>
464.h264ref	<b><u>977</u></b>	<b><u>22.6</u></b>	974	22.7	977	22.6	898	24.6	<b><u>899</u></b>	<b><u>24.6</u></b>	900	24.6
471.omnetpp	440	14.2	438	14.3	<b><u>438</u></b>	<b><u>14.3</u></b>	388	16.1	388	16.1	<b><u>388</u></b>	<b><u>16.1</u></b>
473.astar	672	10.4	666	10.5	<b><u>667</u></b>	<b><u>10.5</u></b>	<b><u>583</u></b>	<b><u>12.0</u></b>	582	12.1	583	12.0
483.xalancbmk	<b><u>329</u></b>	<b><u>21.0</u></b>	331	20.9	328	21.1	<b><u>329</u></b>	<b><u>21.0</u></b>	331	20.9	328	21.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 800 MHz.

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
This result was measured on the PRIMERGY TX300 S5. The PRIMERGY TX300 S5 and the PRIMERGY RX300 S5 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 21.3**

PRIMERGY TX300 S5, Intel Xeon E5504, 2.0 GHz

**SPECint\_base2006 = 19.2**

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc  
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc  
456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc  
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc  
C++ benchmarks (except as noted below):  
icpc  
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 21.3**

PRIMERGY TX300 S5, Intel Xeon E5504, 2.0 GHz

**SPECint\_base2006 = 19.2**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch  
401.bzp2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap  
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 21.3**

PRIMERGY TX300 S5, Intel Xeon E5504, 2.0 GHz

**SPECint\_base2006 = 19.2**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091013.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091013.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 04:34:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 October 2009.