



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M3000

SPECint_rate2006 = 49.1

SPECint_rate_base2006 = 45.4

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Fujitsu

Test date: Oct-2009

Hardware Availability: Jan-2010

Software Availability: Oct-2009

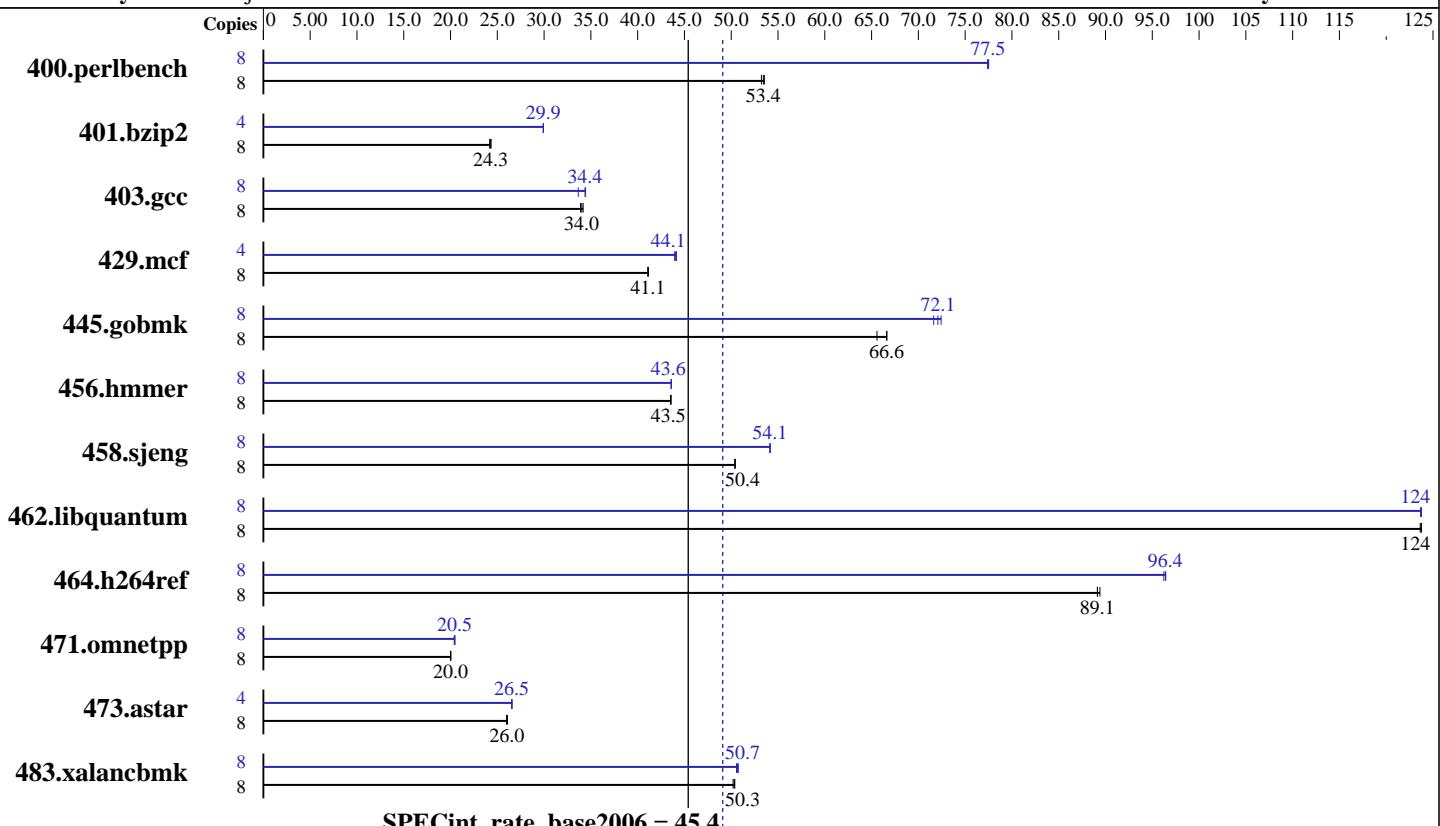

Hardware

CPU Name:	SPARC64 VII
CPU Characteristics:	
CPU MHz:	2750
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	5 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB), 2-way interleaved
Disk Subsystem:	1 x Seagate Savvio 10K.2 (146 GB 10,000 RPM SAS)
Other Hardware:	None

Software

Operating System:	Solaris 10 10/09 with patch 119963-18
Compiler:	Sun Studio 12 Update 1
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M3000

SPECint_rate2006 = 49.1

SPECint_rate_base2006 = 45.4

CPU2006 license: 6

Test date: Oct-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Oct-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1468	53.2	1460	53.5	<u>1463</u>	<u>53.4</u>	8	<u>1009</u>	<u>77.5</u>	1008	77.5	1010	77.4
401.bzip2	8	<u>3179</u>	<u>24.3</u>	3173	24.3	3193	24.2	4	1290	29.9	1290	29.9	<u>1290</u>	<u>29.9</u>
403.gcc	8	1900	33.9	1885	34.2	<u>1893</u>	<u>34.0</u>	8	1914	33.6	<u>1873</u>	<u>34.4</u>	1870	34.4
429.mcf	8	1776	41.1	1773	41.1	<u>1775</u>	<u>41.1</u>	4	<u>828</u>	<u>44.1</u>	826	44.1	830	43.9
445.gobmk	8	<u>1260</u>	<u>66.6</u>	1280	65.6	1259	66.6	8	1171	71.6	1159	72.4	<u>1164</u>	<u>72.1</u>
456.hmmer	8	<u>1714</u>	<u>43.5</u>	1715	43.5	1713	43.6	8	<u>1712</u>	<u>43.6</u>	1712	43.6	1712	43.6
458.sjeng	8	1919	50.4	1921	50.4	<u>1920</u>	<u>50.4</u>	8	1787	54.2	1788	54.1	<u>1788</u>	<u>54.1</u>
462.libquantum	8	1341	124	<u>1340</u>	<u>124</u>	1339	124	8	<u>1340</u>	<u>124</u>	1340	124	1339	124
464.h264ref	8	1986	89.1	1980	89.4	<u>1986</u>	<u>89.1</u>	8	1836	96.4	1840	96.2	<u>1837</u>	<u>96.4</u>
471.omnetpp	8	2500	20.0	<u>2497</u>	<u>20.0</u>	2496	20.0	8	2451	20.4	<u>2444</u>	<u>20.5</u>	2443	20.5
473.astar	8	<u>2158</u>	<u>26.0</u>	2160	26.0	2153	26.1	4	1058	26.5	1056	26.6	<u>1058</u>	<u>26.5</u>
483.xalancbmk	8	1096	50.4	1100	50.2	<u>1097</u>	<u>50.3</u>	8	<u>1089</u>	<u>50.7</u>	1088	50.8	1092	50.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at

http://developers.sun.com/sunstudio/downloads/patches/ss12u1_patches.jsp

Submit Notes

The config file option 'submit' was used. Processes were assigned to specific processors using 'pbind' commands. The list of processors to use was provided in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack.(making more space available for the heap)

System Tunables:

(/etc/system parameters)

tune_t_fsflushr=10
Controls how many seconds elapse between runs of the page flush daemon, fsflush.

autoup=600
Causes pages older than the listed number of seconds to be written by fsflush.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M3000

SPECint_rate2006 = 49.1

SPECint_rate_base2006 = 45.4

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu

Test date: Oct-2009

Hardware Availability: Jan-2010

Software Availability: Oct-2009

Operating System Notes (Continued)

`bufhwm=3000`

Memory byte limit for caching I/O buffers.

`segmap_percent=1`

Set maximum percent memory for file system cache.

Other System Settings:

The webconsole service was turned off using svcadm disable webconsole.

Platform Notes

Memory is 2-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M3000 Server.
Note that the Fujitsu SPARC Enterprise M3000 and Sun SPARC Enterprise M3000 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

`cc`

C++ benchmarks:

`CC`

Base Portability Flags

`400.perlbench: -DSPEC_CPU_SOLARIS_SPARC`

`403.gcc: -DSPEC_CPU_SOLARIS`

`462.libquantum: -DSPEC_CPU_SOLARIS`

`483.xalancbmk: -DSPEC_CPU_SOLARIS`

Base Optimization Flags

C benchmarks:

`-fast -fma=fused -xipo=2 -xpagesize=4M -xarch=sparcfmaf
-xalias_level=std -ll2amm`

C++ benchmarks:

`-library=stlport4 -fast -fma=fused -xipo=2 -xppagesize=4M
-xarch=sparcfmaf -xdepend -xalias_level=compatible -lfast`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M3000

SPECint_rate2006 = 49.1

SPECint_rate_base2006 = 45.4

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu

Test date: Oct-2009

Hardware Availability: Jan-2010

Software Availability: Oct-2009

Base Other Flags

C benchmarks:

-xjobs=2 -V -#

C++ benchmarks:

-xjobs=2 -verbose=diags,version

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

cc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-M /usr/lib/ld/map.bssalign -fma=fused -xipo=2
-xalias_level=std -xrestrict -xprefetch=no%auto -Xc
-lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xalias_level=strong

403.gcc: -fast -xppagesize=4M -M /usr/lib/ld/map.bssalign -fma=fused
-xipo=2 -xalias_level=std -ll2amm

429.mcf: -fast -xppagesize=4M -fma=fused -xipo=2 -xalias_level=std
-ll2amm

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xppagesize=4M
-fma=fused -xalias_level=std -xrestrict

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems Sun SPARC Enterprise M3000	SPECint_rate2006 = 49.1 SPECint_rate_base2006 = 45.4
--	---

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu

Test date: Oct-2009

Hardware Availability: Jan-2010

Software Availability: Oct-2009

Peak Optimization Flags (Continued)

456.hmmer: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xiwo=1

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xiwo=2 -xprefetch=latx:0.5 -l12amm

462.libquantum: Same as 429.mcf

464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xiwo=2 -xalias_level=std -xprefetch=no
-l12amm

C++ benchmarks:

471.omnetpp: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -fma=fused -xiwo=2
-xprefetch_level=2 -Qoption cg -Qlp-av=0 -lfast

473.astar: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -M /usr/lib/ld/map.bssalign
-fma=fused -xiwo=2 -xprefetch=no%auto -xdepend -lfast
-lbsdmalloc

483.xalancbmk: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -fma=fused -xiwo=2 -xprefetch=no
-xdepend -lfast

Peak Other Flags

C benchmarks:

-xjobs=2 -V -#

C++ benchmarks:

-xjobs=2 -verbose=diags,version

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 49.1

Sun SPARC Enterprise M3000

SPECint_rate_base2006 = 45.4

CPU2006 license: 6

Test date: Oct-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Oct-2009

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:10:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 January 2010.