



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint®_rate2006 = 167

SuperServer 5017C-MF (X9SCL-F, Intel Xeon E3-1280)

SPECint_rate_base2006 = 157

CPU2006 license: 001176


Test date: Apr-2011

Test sponsor: Supermicro

Hardware Availability: Apr-2011

Tested by: Supermicro

Software Availability: Jan-2011

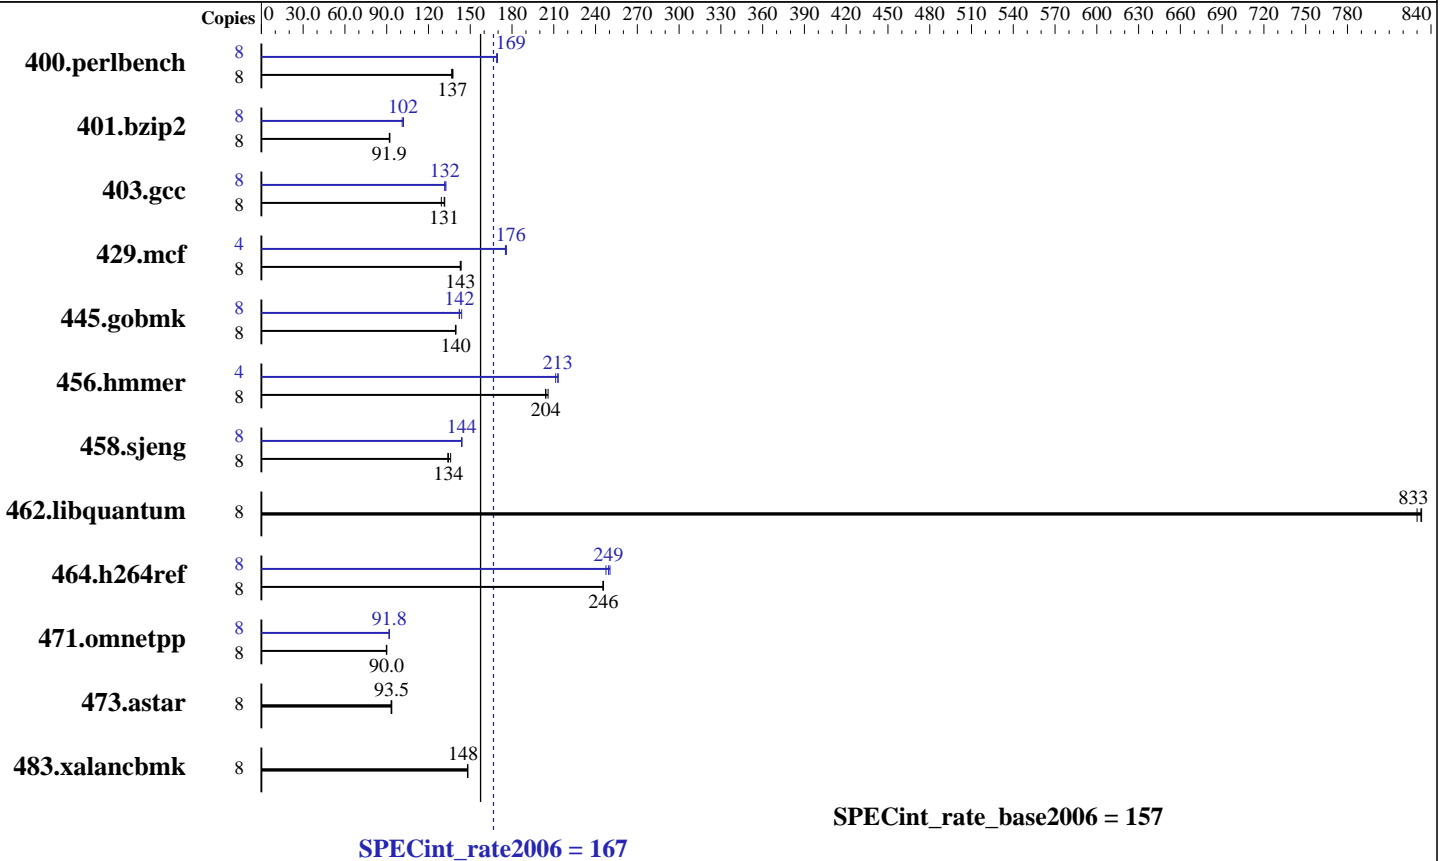

Hardware

CPU Name: Intel Xeon E3-1280
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4 GB 2Rx8 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 250 GB SATA II, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1
 Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32
 Version 12.0.1.116 Build 20101116
 Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 167

SuperServer 5017C-MF (X9SCL-F, Intel Xeon E3-1280)

SPECint_rate_base2006 = 157

CPU2006 license: 001176

Test date: Apr-2011

Test sponsor: Supermicro

Hardware Availability: Apr-2011

Tested by: Supermicro

Software Availability: Jan-2011

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|---------|-------|------------|-------------|------------|-------------|--------|------------|------------|------------|-------------|------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 8 | 572 | 137 | <u>569</u> | <u>137</u> | 568 | 138 | 8 | 462 | 169 | <u>462</u> | <u>169</u> | 461 | 170 |
| 401.bzip2 | 8 | 836 | 92.3 | 840 | 91.9 | <u>840</u> | <u>91.9</u> | 8 | 764 | 101 | <u>758</u> | <u>102</u> | 756 | 102 |
| 403.gcc | 8 | 489 | 132 | <u>490</u> | <u>131</u> | 498 | 129 | 8 | <u>489</u> | <u>132</u> | 489 | 132 | 486 | 133 |
| 429.mcf | 8 | 509 | 143 | 511 | 143 | <u>510</u> | <u>143</u> | 4 | 208 | 175 | 207 | 176 | <u>208</u> | <u>176</u> |
| 445.gobmk | 8 | 602 | 139 | 601 | 140 | <u>601</u> | <u>140</u> | 8 | <u>590</u> | <u>142</u> | 583 | 144 | 591 | 142 |
| 456.hammer | 8 | 366 | 204 | 363 | 206 | <u>365</u> | <u>204</u> | 4 | 177 | 211 | 175 | 213 | <u>175</u> | <u>213</u> |
| 458.sjeng | 8 | 712 | 136 | 723 | 134 | <u>721</u> | <u>134</u> | 8 | 673 | 144 | <u>672</u> | <u>144</u> | 672 | 144 |
| 462.libquantum | 8 | 200 | 830 | <u>199</u> | <u>833</u> | 199 | 833 | 8 | 200 | 830 | <u>199</u> | <u>833</u> | 199 | 833 |
| 464.h264ref | 8 | 722 | 245 | 720 | 246 | <u>721</u> | <u>246</u> | 8 | 715 | 247 | 707 | 250 | <u>710</u> | <u>249</u> |
| 471.omnetpp | 8 | 556 | 90.0 | <u>556</u> | <u>90.0</u> | 557 | 89.8 | 8 | 544 | 91.9 | <u>545</u> | <u>91.8</u> | 545 | 91.8 |
| 473.astar | 8 | 603 | 93.2 | 600 | 93.6 | <u>600</u> | <u>93.5</u> | 8 | 603 | 93.2 | 600 | 93.6 | <u>600</u> | <u>93.5</u> |
| 483.xalancbmk | 8 | 373 | 148 | <u>373</u> | <u>148</u> | 372 | 148 | 8 | 373 | 148 | <u>373</u> | <u>148</u> | 372 | 148 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Hugepages was enabled with the following:
nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 3600 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes

Platform Notes

Fan speed set to Full Speed in BIOS Setup.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 167

SuperServer 5017C-MF (X9SCL-F, Intel Xeon E3-1280)

SPECint_rate_base2006 = 157

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 167

SuperServer 5017C-MF (X9SCL-F, Intel Xeon E3-1280)

SPECint_rate_base2006 = 157

CPU2006 license: 001176

Test date: Apr-2011

Test sponsor: Supermicro

Hardware Availability: Apr-2011

Tested by: Supermicro

Software Availability: Jan-2011

Peak Portability Flags (Continued)

456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xAVX -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-auto-ilp32

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmr: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 167

SuperServer 5017C-MF (X9SCL-F, Intel Xeon E3-1280)

SPECint_rate_base2006 = 157

CPU2006 license: 001176

Test date: Apr-2011

Test sponsor: Supermicro

Hardware Availability: Apr-2011

Tested by: Supermicro

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 18:39:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 April 2011.