



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Advanced Micro Devices)

Gigabyte GA-880GMA-USB3,  
AMD Phenom II X2 555

SPECfp<sup>®</sup>\_rate2006 = 46.6

SPECfp\_rate\_base2006 = 41.3

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2011

Hardware Availability: Apr-2010

Software Availability: Jul-2010

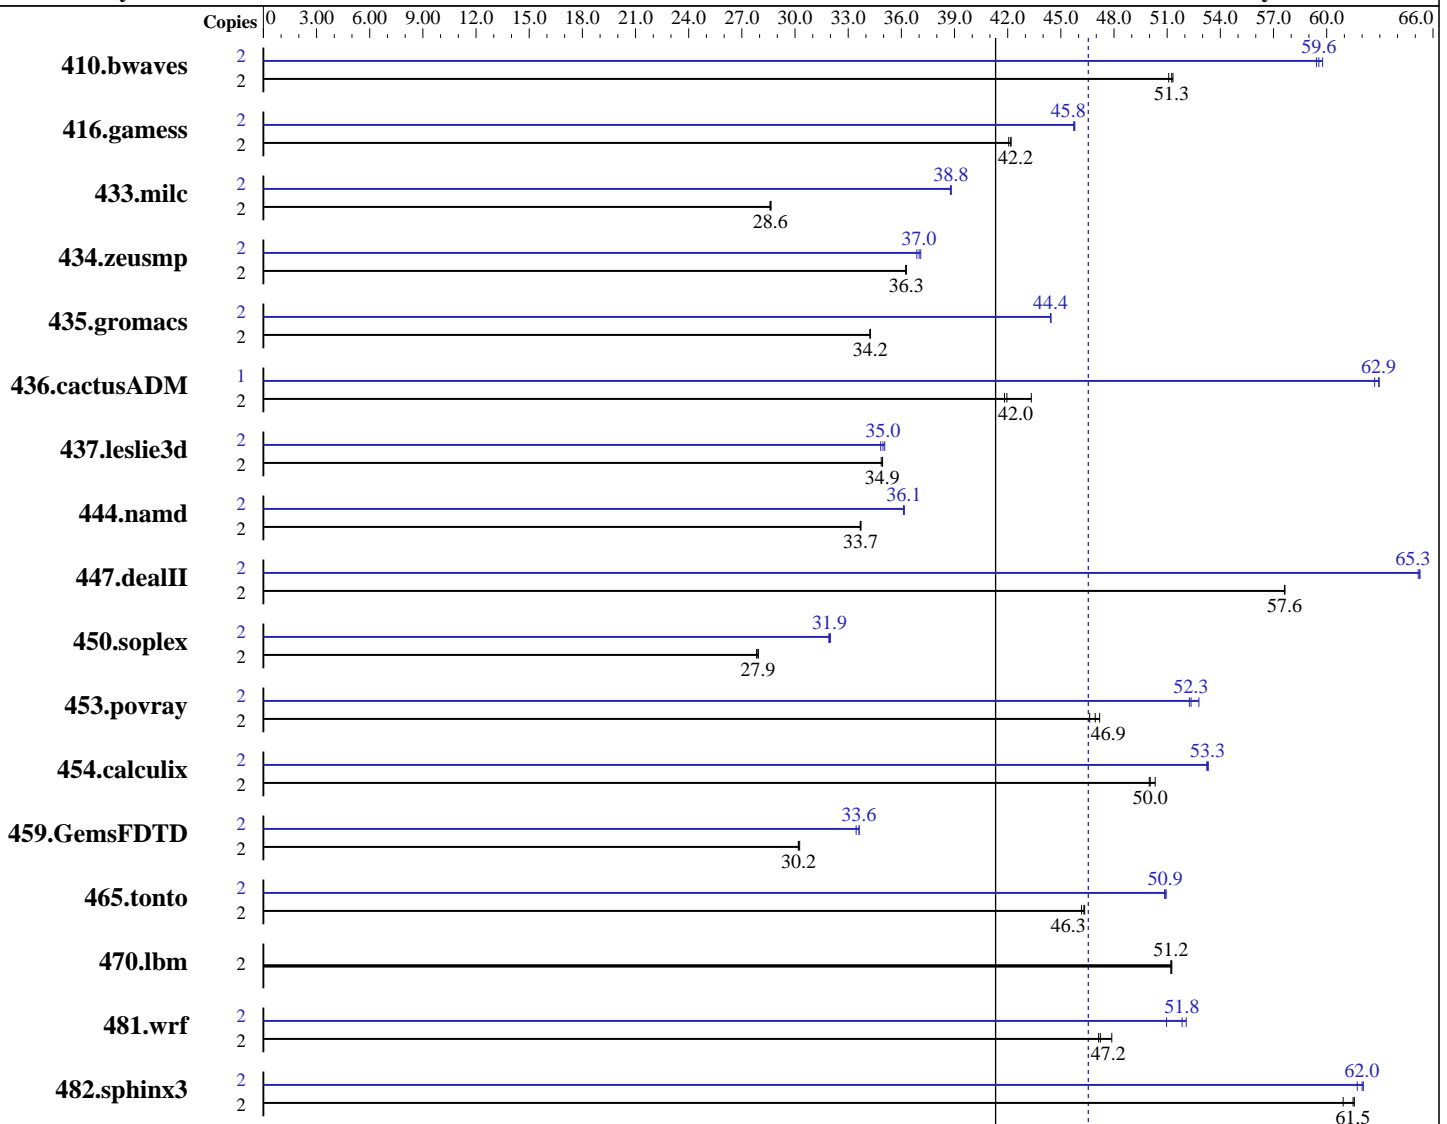

SPECfp\_rate\_base2006 = 41.3

SPECfp\_rate2006 = 46.6

## Hardware

CPU Name: AMD Phenom II X2 555  
 CPU Characteristics:  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64),  
 Kernel 2.6.32.12-0.7-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Advanced Micro Devices)

Gigabyte GA-880GMA-USB3,  
AMD Phenom II X2 555

SPECfp\_rate2006 = 46.6

SPECfp\_rate\_base2006 = 41.3

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2011

Hardware Availability: Apr-2010

Software Availability: Jul-2010

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (4 x 2 GB 1Rx4 PC3-10600U-9)  
Disk Subsystem: 1 x 2 TB SATA, 7200 RPM  
Other Hardware: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	532	51.1	530	51.3	<b>530</b>	<b>51.3</b>	2	<b>456</b>	<b>59.6</b>	455	59.8	457	59.4
416.gamess	2	928	42.2	931	42.1	<b>929</b>	<b>42.2</b>	2	855	45.8	856	45.7	<b>856</b>	<b>45.8</b>
433.milc	2	642	28.6	<b>642</b>	<b>28.6</b>	641	28.6	2	<b>473</b>	<b>38.8</b>	474	38.8	473	38.8
434.zeusmp	2	502	36.3	<b>502</b>	<b>36.3</b>	502	36.2	2	<b>492</b>	<b>37.0</b>	494	36.9	491	37.1
435.gromacs	2	<b>417</b>	<b>34.2</b>	417	34.2	417	34.3	2	<b>321</b>	<b>44.4</b>	321	44.4	321	44.4
436.cactusADM	2	552	43.3	<b>570</b>	<b>42.0</b>	571	41.8	1	<b>190</b>	<b>62.9</b>	190	63.0	191	62.7
437.leslie3d	2	539	34.9	538	34.9	<b>538</b>	<b>34.9</b>	2	540	34.8	536	35.1	<b>538</b>	<b>35.0</b>
444.namd	2	<b>476</b>	<b>33.7</b>	476	33.7	476	33.7	2	444	36.1	<b>444</b>	<b>36.1</b>	443	36.2
447.dealII	2	<b>397</b>	<b>57.6</b>	397	57.6	397	57.6	2	<b>351</b>	<b>65.3</b>	351	65.3	351	65.2
450.soplex	2	599	27.8	<b>598</b>	<b>27.9</b>	597	27.9	2	523	31.9	<b>522</b>	<b>31.9</b>	521	32.0
453.povray	2	228	46.6	<b>227</b>	<b>46.9</b>	225	47.2	2	<b>203</b>	<b>52.3</b>	204	52.3	202	52.8
454.calculix	2	<b>330</b>	<b>50.0</b>	330	50.0	328	50.3	2	310	53.2	<b>310</b>	<b>53.3</b>	309	53.3
459.GemsFDTD	2	703	30.2	<b>702</b>	<b>30.2</b>	701	30.3	2	631	33.6	<b>631</b>	<b>33.6</b>	634	33.5
465.tonto	2	426	46.2	425	46.3	<b>425</b>	<b>46.3</b>	2	387	50.9	386	50.9	<b>387</b>	<b>50.9</b>
470.lbm	2	536	51.3	537	51.2	<b>537</b>	<b>51.2</b>	2	536	51.3	537	51.2	<b>537</b>	<b>51.2</b>
481.wrf	2	467	47.9	474	47.1	<b>473</b>	<b>47.2</b>	2	429	52.1	438	51.0	<b>431</b>	<b>51.8</b>
482.sphinx3	2	<b>634</b>	<b>61.5</b>	640	60.9	633	61.6	2	632	61.7	628	62.1	<b>629</b>	<b>62.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=1792 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

Binaries were compiled on SLES10 SP2 with binutils 2.18



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**GIGA-BYTE Technology Co. Ltd.**

(Test Sponsor: Advanced Micro Devices)

Gigabyte GA-880GMA-USB3,  
AMD Phenom II X2 555

**SPECfp\_rate2006 = 46.6**

**SPECfp\_rate\_base2006 = 41.3**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Apr-2011

**Hardware Availability:** Apr-2010

**Software Availability:** Jul-2010

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "1792"

LD\_LIBRARY\_PATH = "/root/work/cpu2006v1.1/amd1002-rate-libs-revC/64:/root/work/cpu2006v1.1/amd1002-rate-libs-revC/32"

OMP\_NUM\_THREADS = "2"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.lelie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
 -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Advanced Micro Devices)

Gigabyte GA-880GMA-USB3,  
AMD Phenom II X2 555

SPECfp\_rate2006 = 46.6

SPECfp\_rate\_base2006 = 41.3

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2011

Hardware Availability: Apr-2010

Software Availability: Jul-2010

## Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-OPT:malloc\_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m -HP

## Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Advanced Micro Devices)

Gigabyte GA-880GMA-USB3,  
AMD Phenom II X2 555

SPECfp\_rate2006 = 46.6

SPECfp\_rate\_base2006 = 41.3

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2011

Hardware Availability: Apr-2010

Software Availability: Jul-2010

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1  
-CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on

### C++ benchmarks:

444.namd: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
-OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
-CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

### Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:prefetch\_ahead=5  
-LNO:ignore\_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m  
-CG:cmp\_peep=on

416.gamess: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll\_size=256  
-CG:cmp\_peep=on -GRA:prioritize\_by\_density=on -HP

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**GIGA-BYTE Technology Co. Ltd.**

(Test Sponsor: Advanced Micro Devices)

Gigabyte GA-880GMA-USB3,  
AMD Phenom II X2 555

**SPECfp\_rate2006 = 46.6**

**SPECfp\_rate\_base2006 = 41.3**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Apr-2011

**Hardware Availability:** Apr-2010

**Software Availability:** Jul-2010

## Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -mso -Ofast  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m -LANG:heap\_allocation\_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load\_exe=0  
-CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2 -CG:compute\_to=on  
-LNO:prefetch\_ahead=30 -WOPT:unroll=2  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on -m3dnow  
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20101109.html>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.20110119.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20101109.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.20110119.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:09:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 May 2011.