SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HX5 (Intel Xeon E7-8867L)

SPECint®_rate2006 = 478

SPECint_rate_base2006 = 443

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

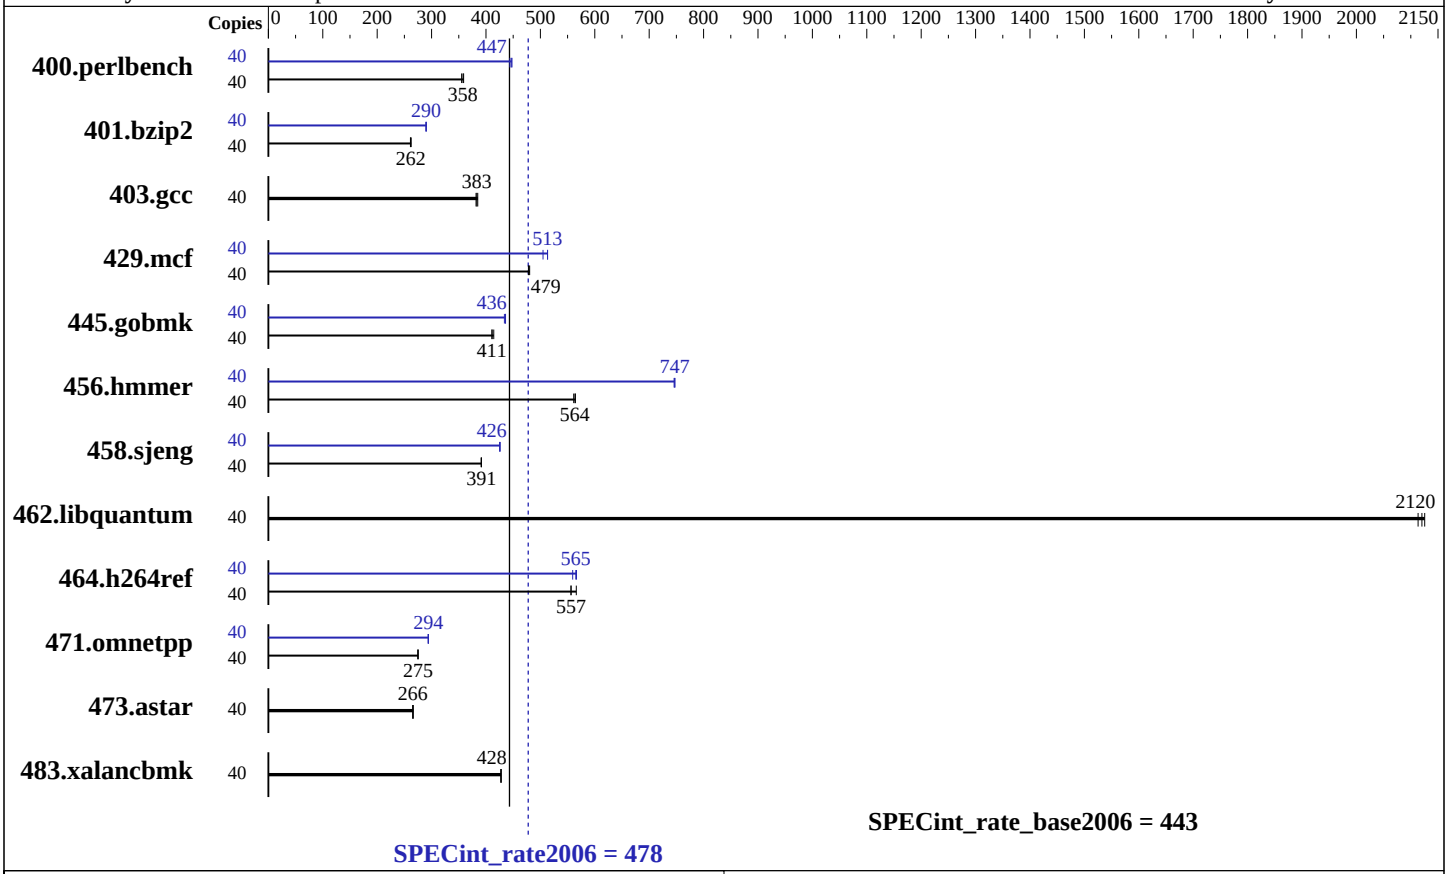

Hardware

CPU Name:	Intel Xeon E7-8867L
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 4Rx8 PC3-8500R-7, ECC)
Disk Subsystem:	2 x 50 GB SSD, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HX5 (Intel Xeon E7-8867L)

SPECint_rate2006 = 478

SPECint_rate_base2006 = 443

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	1089	359	1100	355	**1092**	**358**	40	880	444	**875**	**447**	873	448
401.bzip2	40	1478	261	**1475**	**262**	1471	262	40	1333	290	1329	290	**1331**	**290**
403.gcc	40	837	385	**840**	**383**	844	382	40	837	385	**840**	**383**	844	382
429.mcf	40	**762**	**479**	760	480	763	478	40	723	505	711	513	**711**	**513**
445.gobmk	40	1021	411	**1020**	**411**	1013	414	40	**963**	**436**	963	436	967	434
456.hmmer	40	661	564	**662**	**564**	665	561	40	**500**	**747**	500	746	499	747
458.sjeng	40	1237	391	1236	392	**1236**	**391**	40	1138	425	1137	426	**1137**	**426**
462.libquantum	40	390	2130	**391**	**2120**	392	2110	40	390	2130	**391**	**2120**	392	2110
464.h264ref	40	1564	566	**1591**	**557**	1592	556	40	1582	559	1563	566	**1566**	**565**
471.omnetpp	40	908	275	**909**	**275**	910	275	40	851	294	**850**	**294**	850	294
473.astar	40	1055	266	1058	265	**1058**	**266**	40	1055	266	1058	265	**1058**	**266**
483.xalancbmk	40	645	428	646	428	**645**	**428**	40	645	428	646	428	**645**	**428**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 1 > /proc/sys/vm/zone_reclaim_mode
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 26000 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
BIOS Settings:
Turbo Boost Power Optimization set to Traditional
```

General Notes

```
Binaries were compiled on RHEL5.5
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 17:37:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 June 2011.