



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 133

IBM BladeCenter HS22V (Intel Xeon E5606)

SPECfp_rate_base2006 = 126

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

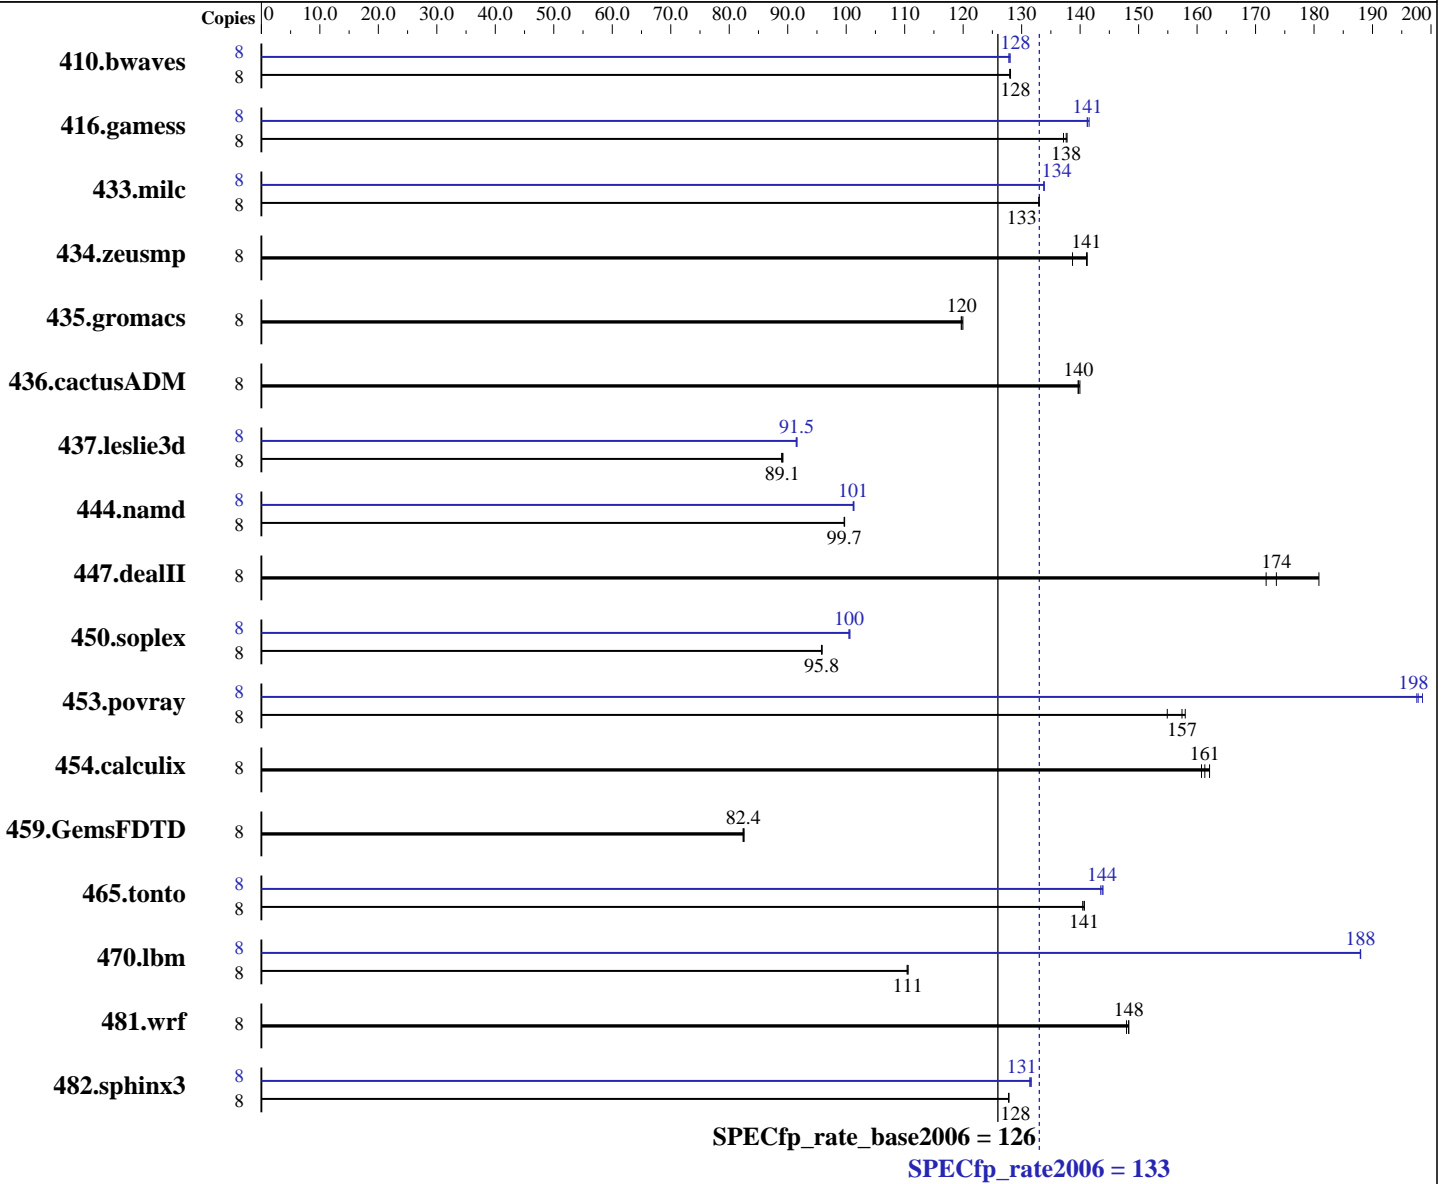

Hardware

CPU Name: Intel Xeon E5606
 CPU Characteristics:
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 133

IBM BladeCenter HS22V (Intel Xeon E5606)

SPECfp_rate_base2006 = 126

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC, running at 1066 MHz)
 Disk Subsystem: 2 x 50 GB SATA, SSD, RAID 0
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	849	128	849	128	850	128	8	850	128	849	128	850	128		
416.gamess	8	1137	138	1138	138	1142	137	8	1107	142	1109	141	1109	141		
433.milc	8	552	133	552	133	552	133	8	549	134	549	134	549	134		
434.zeusmp	8	516	141	516	141	525	139	8	516	141	516	141	525	139		
435.gromacs	8	476	120	477	120	477	120	8	476	120	477	120	477	120		
436.cactusADM	8	684	140	683	140	685	140	8	684	140	683	140	685	140		
437.leslie3d	8	845	89.0	843	89.2	844	89.1	8	822	91.4	822	91.5	821	91.6		
444.namd	8	643	99.7	644	99.7	644	99.7	8	634	101	633	101	634	101		
447.dealII	8	506	181	527	174	533	172	8	506	181	527	174	533	172		
450.soplex	8	696	95.9	697	95.8	696	95.8	8	664	100	664	100	663	101		
453.povray	8	275	155	269	158	270	157	8	214	199	215	198	215	198		
454.calculix	8	407	162	409	161	411	161	8	407	162	409	161	411	161		
459.GemsFDTD	8	1030	82.4	1028	82.5	1030	82.4	8	1030	82.4	1028	82.5	1030	82.4		
465.tonto	8	560	141	561	140	559	141	8	548	144	547	144	548	144		
470.lbm	8	996	110	994	111	994	111	8	585	188	585	188	585	188		
481.wrf	8	603	148	603	148	604	148	8	603	148	603	148	604	148		
482.sphinx3	8	1220	128	1220	128	1220	128	8	1187	131	1186	131	1184	132		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodet /mnt/hugepages hugetlbfs nodev 0 0' added to /etc/fstab
echo 7200 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 133

IBM BladeCenter HS22V (Intel Xeon E5606)

SPECfp_rate_base2006 = 126

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Platform Notes

Load Default BIOS Settings and then change the following
Power C-states enabled
Demand Scrub disabled

General Notes

Binaries compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 133

IBM BladeCenter HS22V (Intel Xeon E5606)

SPECfp_rate_base2006 = 126

CPU2006 license: 11

Test date: Jun-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 133

IBM BladeCenter HS22V (Intel Xeon E5606)

SPECfp_rate_base2006 = 126

CPU2006 license: 11

Test date: Jun-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 133

IBM BladeCenter HS22V (Intel Xeon E5606)

SPECfp_rate_base2006 = 126

CPU2006 license: 11

Test date: Jun-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:24:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.