



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint®2006 = 34.2**

### IBM System x3250 M4 (Intel Pentium G620)

**SPECint\_base2006 = 32.5**

CPU2006 license: 11


Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

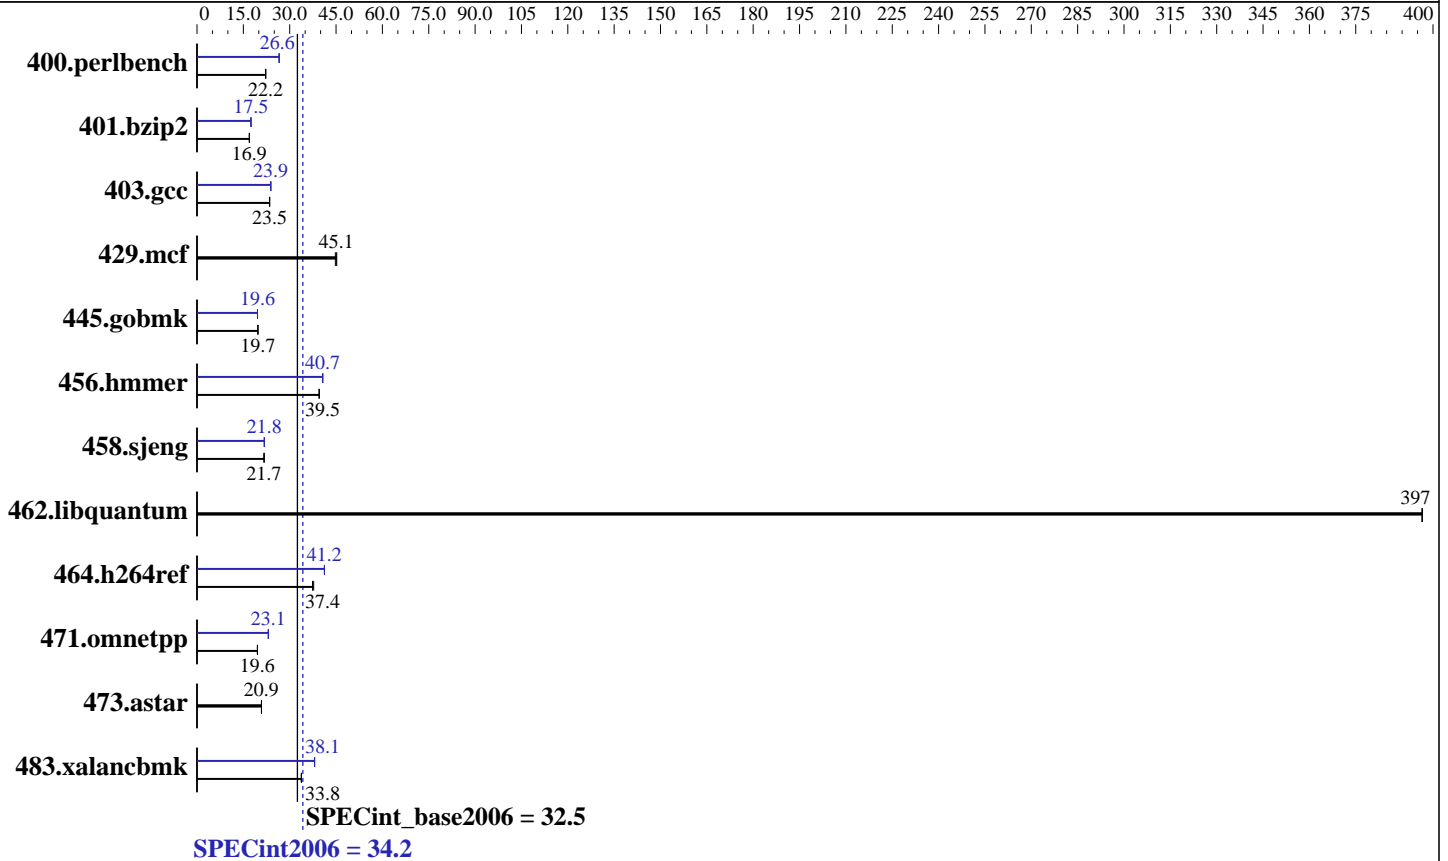

### Hardware

CPU Name: Intel Pentium G620  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC, running at 1066 MHz)  
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel Compiler XE Build 20110803  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 34.2

IBM System x3250 M4 (Intel Pentium G620)

SPECint\_base2006 = 32.5

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Nov-2011  
Hardware Availability: Oct-2011  
Software Availability: Aug-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	440	22.2	439	22.3	<b>440</b>	<b>22.2</b>	368	26.6	367	26.6	<b>367</b>	<b>26.6</b>
401.bzip2	570	16.9	<b>570</b>	<b>16.9</b>	568	17.0	554	17.4	551	17.5	<b>552</b>	<b>17.5</b>
403.gcc	<b>342</b>	<b>23.5</b>	342	23.5	343	23.5	337	23.9	337	23.9	<b>337</b>	<b>23.9</b>
429.mcf	202	45.2	204	44.8	<b>202</b>	<b>45.1</b>	202	45.2	204	44.8	<b>202</b>	<b>45.1</b>
445.gobmk	532	19.7	532	19.7	<b>532</b>	<b>19.7</b>	<b>536</b>	<b>19.6</b>	536	19.6	536	19.6
456.hammer	236	39.5	<b>236</b>	<b>39.5</b>	236	39.6	229	40.7	229	40.7	<b>229</b>	<b>40.7</b>
458.sjeng	558	21.7	557	21.7	<b>557</b>	<b>21.7</b>	<b>555</b>	<b>21.8</b>	555	21.8	556	21.8
462.libquantum	52.3	396	<b>52.3</b>	<b>397</b>	52.3	397	52.3	396	<b>52.3</b>	<b>397</b>	52.3	397
464.h264ref	592	37.4	586	37.8	<b>591</b>	<b>37.4</b>	<b>537</b>	<b>41.2</b>	537	41.2	536	41.3
471.omnetpp	<b>320</b>	<b>19.6</b>	320	19.5	319	19.6	271	23.1	<b>271</b>	<b>23.1</b>	271	23.1
473.astar	336	20.9	<b>336</b>	<b>20.9</b>	337	20.8	336	20.9	<b>336</b>	<b>20.9</b>	337	20.8
483.xalancbmk	<b>204</b>	<b>33.8</b>	204	33.8	204	33.8	181	38.1	181	38.0	<b>181</b>	<b>38.1</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

BIOS Settings:  
C-State enabled in BIOS

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/root/SPECcpu12.1/smartheap:/root/SPECcpu12.1/ic12.1-libs/ia32:/root/SPECcpu12.1/ic12.1-libs/intel64"

OMP\_NUM\_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory  
using RHEL5.5 with binutils-2.17.50.0.6-14.el5

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 34.2

IBM System x3250 M4 (Intel Pentium G620)

SPECint\_base2006 = 32.5

CPU2006 license: 11

Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 34.2

IBM System x3250 M4 (Intel Pentium G620)

SPECint\_base2006 = 32.5

CPU2006 license: 11

Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
              -L/smartheap -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 34.2

IBM System x3250 M4 (Intel Pentium G620)

SPECint\_base2006 = 32.5

CPU2006 license: 11

Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 00:49:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 December 2011.