



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4256 EE

SPECint®2006 = 22.3

SPECint_base2006 = 18.8

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

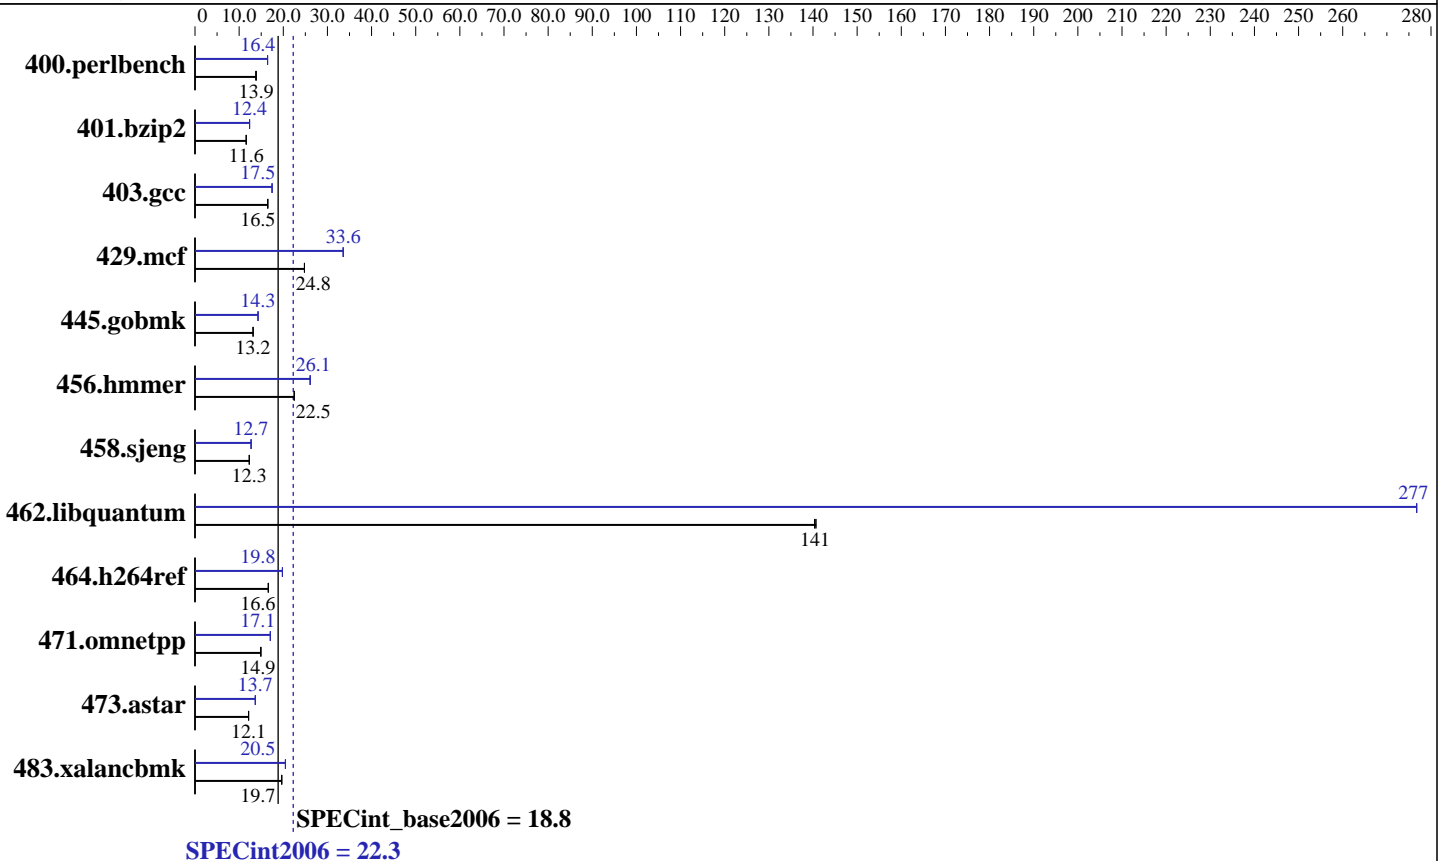

Hardware

CPU Name: AMD Opteron 4256 EE
CPU Characteristics: AMD Turbo CORE technology up to 2.80 GHz
CPU MHz: 1600
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 256 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 128 GB SATA, 7200 RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1,
Kernel 2.6.32-131.0.15.el6.x86_64
Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (Full multiuser with network)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4256 EE

SPECint2006 = 22.3

SPECint_base2006 = 18.8

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	711	13.7	704	13.9	704	13.9	594	16.4	594	16.4	594	16.4
401.bzip2	832	11.6	832	11.6	831	11.6	781	12.4	780	12.4	781	12.4
403.gcc	488	16.5	488	16.5	488	16.5	461	17.5	461	17.5	461	17.5
429.mcf	368	24.8	368	24.8	368	24.8	272	33.6	272	33.6	272	33.6
445.gobmk	797	13.2	797	13.2	797	13.2	735	14.3	735	14.3	734	14.3
456.hammer	415	22.5	415	22.5	415	22.5	358	26.1	357	26.1	358	26.1
458.sjeng	984	12.3	984	12.3	984	12.3	953	12.7	952	12.7	952	12.7
462.libquantum	148	140	147	141	147	141	74.9	277	74.9	277	74.9	277
464.h264ref	1332	16.6	1332	16.6	1332	16.6	1117	19.8	1118	19.8	1118	19.8
471.omnetpp	418	14.9	419	14.9	420	14.9	366	17.1	366	17.1	366	17.1
473.astar	578	12.1	578	12.1	578	12.1	514	13.7	514	13.7	514	13.7
483.xalancbmk	351	19.7	352	19.6	351	19.7	337	20.5	337	20.5	337	20.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Set kernel/randomize_va_space=0 in /etc/sysctl.conf
cpuspeed stop was used to set the CPU frequency to its maximum.

Set vm/nr_hugepages=2000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-speed-libs-revA/32:/root/work/cpu2006v1.2/amd1104-speed-libs-revA/64"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15"
O64_OMP_SPIN_COUNT = "800000"
O64_OMP_SPIN_USER_LOCK = "true"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4256 EE

SPECint2006 = 22.3

SPECint_base2006 = 18.8

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

General Notes (Continued)

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -CG:local_sched_alg=1 -CG:p2align=0
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bd=2m:heap=2m -LNO:prefetch=2

C++ benchmarks:

-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4256 EE

SPECint2006 = 22.3

SPECint_base2006 = 18.8

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
 -IPA:plimit=20000 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
 -CG:load_exe=0 -CG:unroll_fb_req=on -CG:movext_icmp=off
 -HP:bdt=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
 -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
 -HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
 -INLINE:aggressive=on -CG:gcm=off
 -GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
 -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1
 -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bdt=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
 -OPT:alias=disjoint -OPT:unroll_times_max=16
 -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4256 EE

SPECint2006 = 22.3

SPECint_base2006 = 18.8

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-CG:p2align=1 -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:bdt=2m:heap=2m -WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -OPT:unroll_size=512
-OPT:unroll_times_max=8 -LNO:prefetch=2 -LNO:pf2=0
-CG:local_sched_alg=1 -INLINE:aggressive=on
-IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m,limit=450 -apo

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -CG:gcm=off
-INLINE:aggressive=on -WOPT:if_conv=0 -WOPT:sib=on -m32
-HP:bdt=2m:heap=2m

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=0 -GRA:optimize_boundary=on -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=0 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4256 EE

SPECint2006 = 22.3

SPECint_base2006 = 18.8

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 02:03:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 February 2012.