



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint®\_rate2006 = 174**

PowerEdge M620 (Intel Xeon E5-2603, 1.80 GHz)

**SPECint\_rate\_base2006 = 167**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

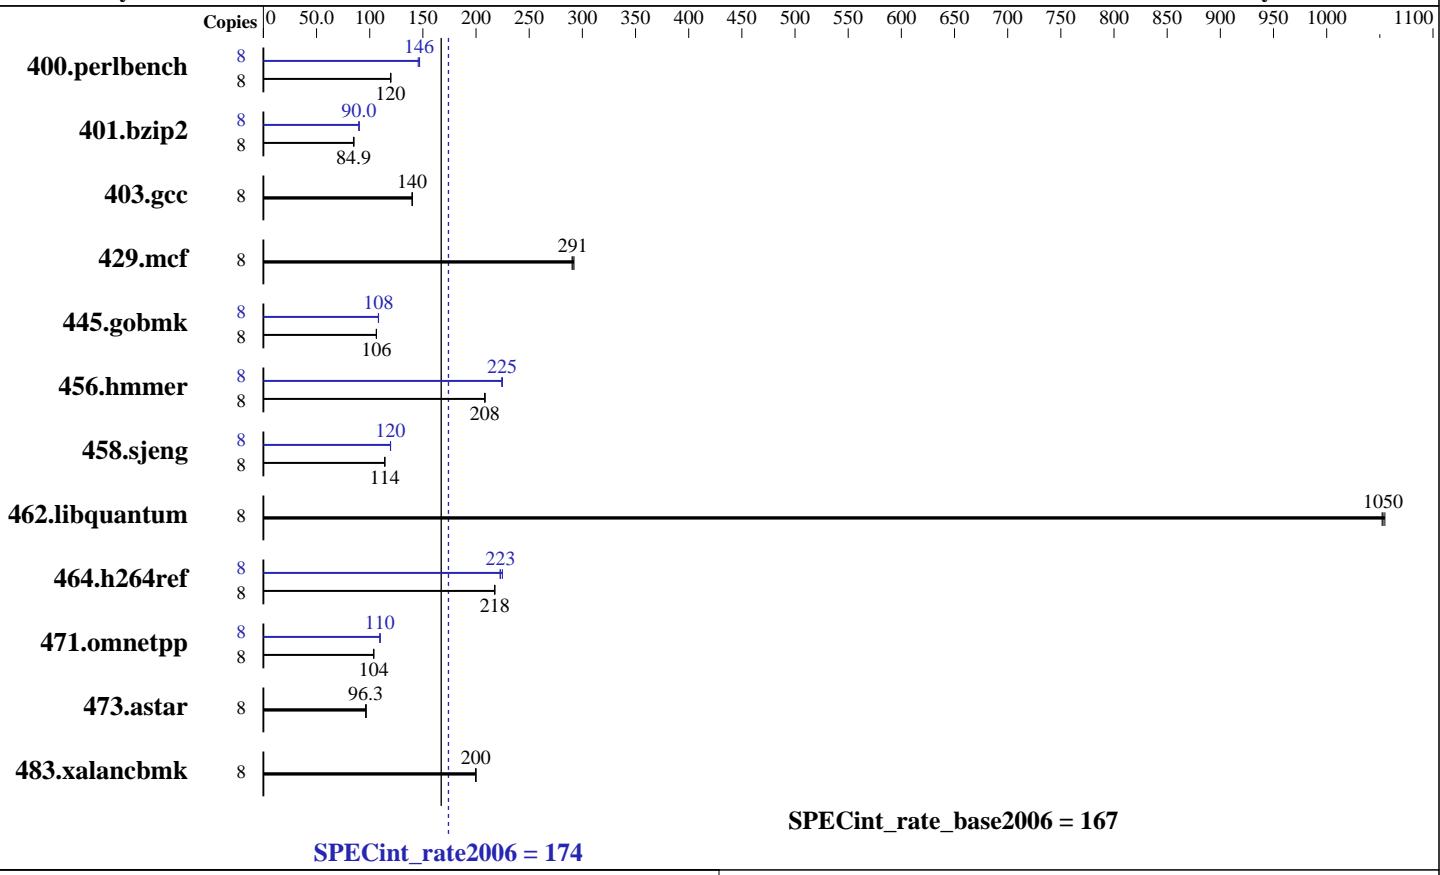

<b>Hardware</b>		<b>Software</b>	
CPU Name:	Intel Xeon E5-2603	Operating System:	SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.9-default
CPU Characteristics:		Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
CPU MHz:	1800	Auto Parallel:	No
FPU:	Integrated	File System:	ext3
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip	System State:	Run level 3 (add definition here)
CPU(s) orderable:	1,2 chip	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V9.01
L3 Cache:	10 MB I+D on chip per chip		
Other Cache:	None		
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)		
Disk Subsystem:	1 x 500 GB 7200 RPM SATA		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 174

PowerEdge M620 (Intel Xeon E5-2603, 1.80 GHz)

SPECint\_rate\_base2006 = 167

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>653</b>	<b>120</b>	654	120	651	120	8	<b>534</b>	<b>146</b>	537	146	532	147
401.bzip2	8	<b>909</b>	<b>84.9</b>	906	85.2	911	84.7	8	860	89.8	857	90.0	<b>858</b>	<b>90.0</b>
403.gcc	8	460	140	460	140	<b>460</b>	<b>140</b>	8	460	140	460	140	<b>460</b>	<b>140</b>
429.mcf	8	250	292	251	290	<b>251</b>	<b>291</b>	8	250	292	251	290	<b>251</b>	<b>291</b>
445.gobmk	8	790	106	<b>789</b>	<b>106</b>	789	106	8	<b>775</b>	<b>108</b>	776	108	<b>775</b>	108
456.hammer	8	359	208	358	209	<b>358</b>	<b>208</b>	8	332	225	<b>332</b>	<b>225</b>	333	224
458.sjeng	8	849	114	847	114	<b>848</b>	<b>114</b>	8	810	120	809	120	<b>810</b>	<b>120</b>
462.libquantum	8	157	1050	<b>157</b>	<b>1050</b>	158	1050	8	157	1050	<b>157</b>	<b>1050</b>	158	1050
464.h264ref	8	813	218	<b>814</b>	<b>218</b>	814	217	8	795	223	787	225	<b>793</b>	<b>223</b>
471.omnetpp	8	483	104	<b>482</b>	<b>104</b>	481	104	8	457	110	455	110	<b>456</b>	<b>110</b>
473.astar	8	581	96.7	<b>583</b>	<b>96.3</b>	584	96.2	8	581	96.7	<b>583</b>	<b>96.3</b>	584	96.2
483.xalancbmk	8	276	200	<b>276</b>	<b>200</b>	277	200	8	276	200	<b>276</b>	<b>200</b>	277	200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost set to Enabled

C States/C1E set to Enabled

Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on linux-8itg Wed Feb 15 18:47:20 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz

2 "physical id"s (chips)

8 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = 174**

PowerEdge M620 (Intel Xeon E5-2603, 1.80 GHz)

**SPECint\_rate\_base2006 = 167**

CPU2006 license: 55

**Test date:** Feb-2012

Test sponsor: Dell Inc.

**Hardware Availability:** Mar-2012

Tested by: Dell Inc.

**Software Availability:** Feb-2012

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings   : 4
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      132122692 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 11 (x86_64)
  VERSION = 11
  PATCHLEVEL = 2
```

```
uname -a:
Linux linux-8itg 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012
(54ddfaf) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 15 18:38 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal      ext3  455G  59G  373G  14%  /
```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/CPU2006-1.2/lib32:/root/CPU2006-1.2/lib64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2603, 1.80 GHz)

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECint\_rate2006 = 174**

**SPECint\_rate\_base2006 = 167**

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 174

PowerEdge M620 (Intel Xeon E5-2603, 1.80 GHz)

SPECint\_rate\_base2006 = 167

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
  
403.gcc: basepeak = yes  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M620 (Intel Xeon E5-2603, 1.80 GHz)

**SPECint\_rate2006 = 174**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 02:39:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 March 2012.