



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®2006 = 59.8

Express5800/R120d-2M (Intel Xeon E5-2690)

SPECint_base2006 = 55.0

CPU2006 license: 9006


Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

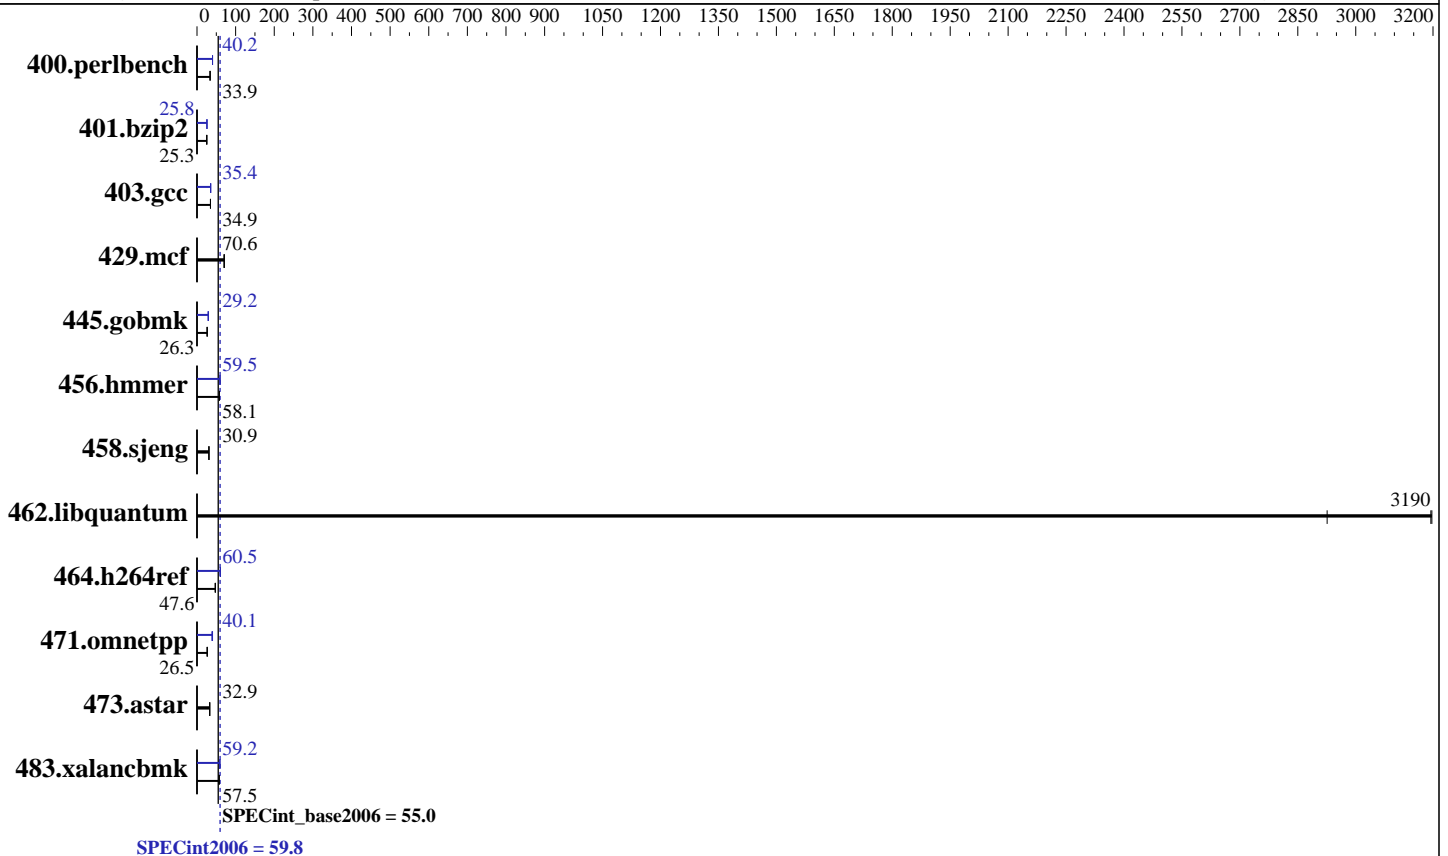

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = **59.8**

Express5800/R120d-2M (Intel Xeon E5-2690)

SPECint_base2006 = **55.0**

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	287	34.0	288	33.9	288	33.9	243	40.3	243	40.2	243	40.2
401.bzip2	381	25.3	382	25.3	382	25.3	375	25.8	375	25.8	375	25.8
403.gcc	231	34.8	231	34.9	231	34.9	227	35.4	228	35.3	227	35.4
429.mcf	130	70.0	129	70.7	129	70.6	130	70.0	129	70.7	129	70.6
445.gobmk	398	26.4	399	26.3	398	26.3	360	29.2	359	29.2	360	29.2
456.hmmr	161	58.1	160	58.1	160	58.1	157	59.4	157	59.5	156	59.8
458.sjeng	392	30.9	392	30.9	392	30.9	392	30.9	392	30.9	392	30.9
462.libquantum	7.08	2930	6.49	3190	6.48	3200	7.08	2930	6.49	3190	6.48	3200
464.h264ref	464	47.7	465	47.6	471	47.0	366	60.5	366	60.5	366	60.5
471.omnetpp	236	26.5	236	26.5	236	26.4	156	40.1	155	40.2	162	38.5
473.astar	214	32.9	214	32.8	212	33.1	214	32.9	214	32.8	212	33.1
483.xalancbmk	120	57.5	120	57.7	121	56.9	116	59.3	117	58.9	117	59.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance
Memory Voltage: 1.5 V
Hyper-Threading: Disabled

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
OMP_NUM_THREADS = "16"

The Express5800/R120d-1M and the Express5800/R120d-2M models are electronically equivalent. The results have been measured on the Express5800/R120d-2M model.

Added glibc-static-2.12-1.47.el6.x86_64.rpm to enable static linking

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 59.8

Express5800/R120d-2M (Intel Xeon E5-2690)

SPECint_base2006 = 55.0

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 59.8

Express5800/R120d-2M (Intel Xeon E5-2690)

SPECint_base2006 = 55.0

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 59.8

Express5800/R120d-2M (Intel Xeon E5-2690)

SPECint_base2006 = 55.0

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 05:51:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 June 2012.