



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®2006 = 27.4

Huawei RH2285 V2 (Intel Xeon E5-2403)

SPECint_base2006 = 26.2

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

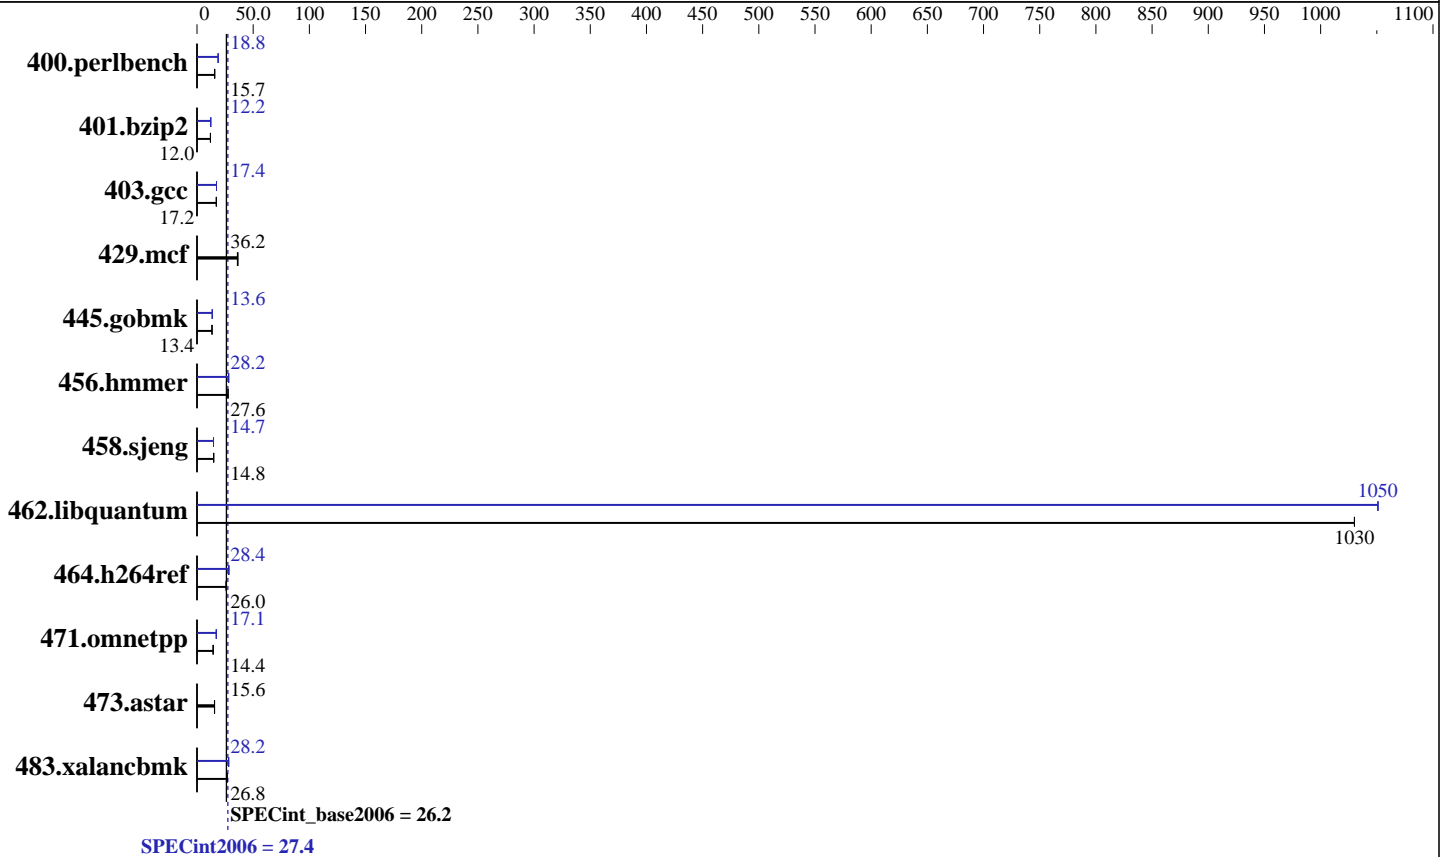

Hardware

CPU Name: Intel Xeon E5-2403
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 1Rx4 PC3-10600R-11, ECC, running at 1067 MHz and CL7)
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 27.4

Huawei RH2285 V2 (Intel Xeon E5-2403)

SPECint_base2006 = 26.2

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	621	15.7	621	15.7	622	15.7	519	18.8	519	18.8	519	18.8
401.bzip2	806	12.0	808	11.9	807	12.0	789	12.2	788	12.2	789	12.2
403.gcc	468	17.2	467	17.2	468	17.2	464	17.4	464	17.3	464	17.4
429.mcf	254	35.9	250	36.5	252	36.2	254	35.9	250	36.5	252	36.2
445.gobmk	785	13.4	785	13.4	785	13.4	773	13.6	773	13.6	773	13.6
456.hammer	338	27.6	338	27.6	338	27.6	331	28.2	331	28.2	331	28.2
458.sjeng	815	14.8	815	14.8	815	14.8	823	14.7	823	14.7	824	14.7
462.libquantum	20.1	1030	20.1	1030	20.1	1030	19.7	1050	19.7	1050	19.7	1050
464.h264ref	852	26.0	851	26.0	852	26.0	790	28.0	780	28.4	776	28.5
471.omnetpp	434	14.4	434	14.4	434	14.4	365	17.1	364	17.1	363	17.2
473.astar	452	15.5	449	15.6	449	15.6	452	15.5	449	15.6	449	15.6
483.xalancbmk	258	26.8	258	26.8	258	26.8	245	28.2	245	28.2	245	28.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Select only test related files when installing the operating system

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Sysinfo program /spec/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on RH62-yjp2 Sun Sep 23 20:46:52 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2403 0 @ 1.80GHz
2 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 27.4

Huawei RH2285 V2 (Intel Xeon E5-2403)

SPECint_base2006 = 26.2

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

Platform Notes (Continued)

physical 1: cores 0 1 2 3
cache size : 10240 KB

From /proc/meminfo
MemTotal: 49403792 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux RH62-yjp2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 21 15:26

SPEC is set to: /spec
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext3 270G 54G 203G 21% /

Additional information from dmidecode:
Memory:
12x Samsu M393B 4 GB 1333 MHz 1 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "8"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory
using RHEL 6.1

The Huawei RH2285 v2 and Huawei RH2285H v2 models are electronically equivalent.
The results have been measured on a Huawei RH2285 v2 model.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 27.4

Huawei RH2285 V2 (Intel Xeon E5-2403)

SPECint_base2006 = 26.2

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 27.4

Huawei RH2285 V2 (Intel Xeon E5-2403)

SPECint_base2006 = 26.2

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
 -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
 -auto-p32

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-ra-region-strategy=block -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 27.4

Huawei RH2285 V2 (Intel Xeon E5-2403)

SPECint_base2006 = 26.2

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

471.omnetpp (continued):

-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 12:55:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 October 2012.