



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Itaotec

### SPECint®\_rate2006 = 275

### Servidor Itaotec MX225+ (Intel Xeon E5-2650)

### SPECint\_rate\_base2006 = 262

CPU2006 license: 9001


Test sponsor: Itaotec

Tested by: Itaotec

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

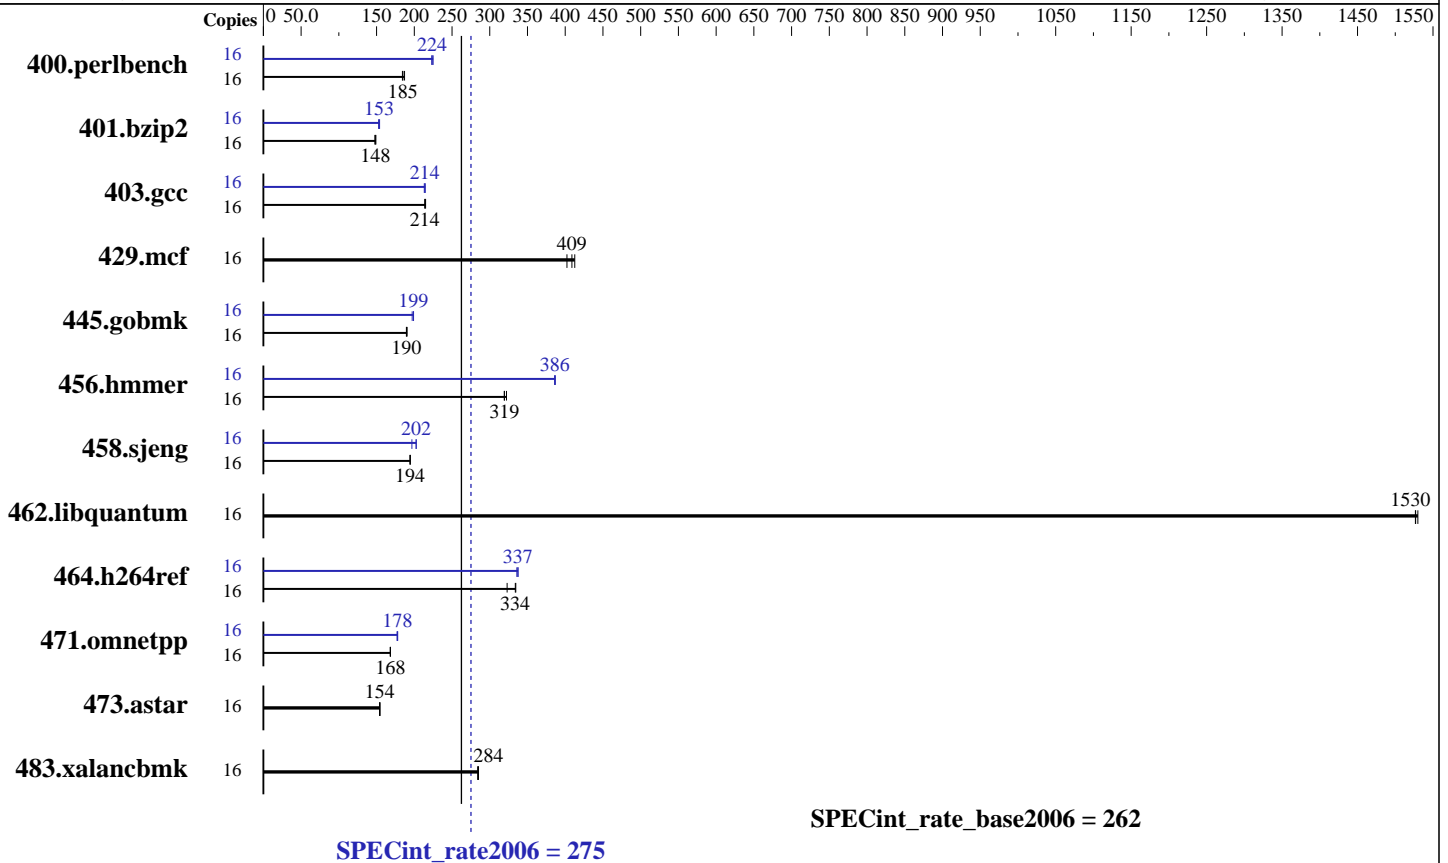

### Hardware

CPU Name: Intel Xeon E5-2650  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8 x 4 GB 1Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 500 GB, SATA-2, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.3, 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 275

Servidor Itaotec MX225+ (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 262

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Apr-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	848	184	<b>845</b>	<b>185</b>	836	187	16	701	223	695	225	<b>699</b>	<b>224</b>
401.bzip2	16	<b>1041</b>	<b>148</b>	1045	148	1036	149	16	1003	154	1011	153	<b>1007</b>	<b>153</b>
403.gcc	16	599	215	<b>602</b>	<b>214</b>	602	214	16	<b>602</b>	<b>214</b>	604	213	601	214
429.mcf	16	363	402	<b>357</b>	<b>409</b>	354	413	16	363	402	<b>357</b>	<b>409</b>	354	413
445.gobmk	16	<b>884</b>	<b>190</b>	886	190	881	190	16	<b>844</b>	<b>199</b>	851	197	843	199
456.hammer	16	<b>467</b>	<b>319</b>	463	322	468	319	16	387	386	386	387	<b>386</b>	<b>386</b>
458.sjeng	16	<b>995</b>	<b>194</b>	995	195	995	194	16	984	197	<b>957</b>	<b>202</b>	956	203
462.libquantum	16	217	1530	<b>217</b>	<b>1530</b>	217	1530	16	217	1530	<b>217</b>	<b>1530</b>	217	1530
464.h264ref	16	1096	323	1059	334	<b>1061</b>	<b>334</b>	16	1054	336	1049	337	<b>1050</b>	<b>337</b>
471.omnetpp	16	594	168	595	168	<b>594</b>	<b>168</b>	16	562	178	565	177	<b>562</b>	<b>178</b>
473.astar	16	<b>728</b>	<b>154</b>	730	154	727	154	16	<b>728</b>	<b>154</b>	730	154	727	154
483.xalancbmk	16	387	285	389	284	<b>388</b>	<b>284</b>	16	387	285	389	284	<b>388</b>	<b>284</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c  
running on localhost Thu Apr 5 17:41:34 2012

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz  
1 "physical id"s (chips)  
16 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The  
following excerpts from /proc/cpuinfo might not be reliable. Use with  
caution.)  
cpu cores : 8  
siblings : 16

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 275

Servidor Itaotec MX225+ (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 262

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Apr-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Platform Notes (Continued)

physical 0: cores 0 1 2 3 4 5 6 7  
cache size : 20480 KB

From /proc/meminfo  
MemTotal: 32850352 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/\*release\* /etc/\*version\*  
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:  
Linux localhost 2.6.32-279.el6.x86\_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Apr 5 17:35

SPEC is set to: /home/rcaneca/cpu2006  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/vg\_fam5-lv\_home  
ext4 394G 2.1G 372G 1% /home

(End of data from sysinfo program)

## General Notes

This result was measured on the Servidor Itaotec MX205.  
The Servidor Itaotec LX205, the Servidor Itaotec MX205 and the Servidor Itaotec MX225+ are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 275

Servidor Itaotec MX225+ (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 262

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Apr-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Base Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmer: icc -m64  
458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 275

Servidor Itautec MX225+ (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 262

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Apr-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 275

Servidor Itautec MX225+ (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 262

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Apr-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.html](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.xml](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:52:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 October 2012.