



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint®_rate2006 = 174

Servidor Itaotec MX205 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 9001


Test sponsor: Itaotec

Tested by: Itaotec

Test date: Jan-2013

Hardware Availability: Jun-2012

Software Availability: Jun-2012

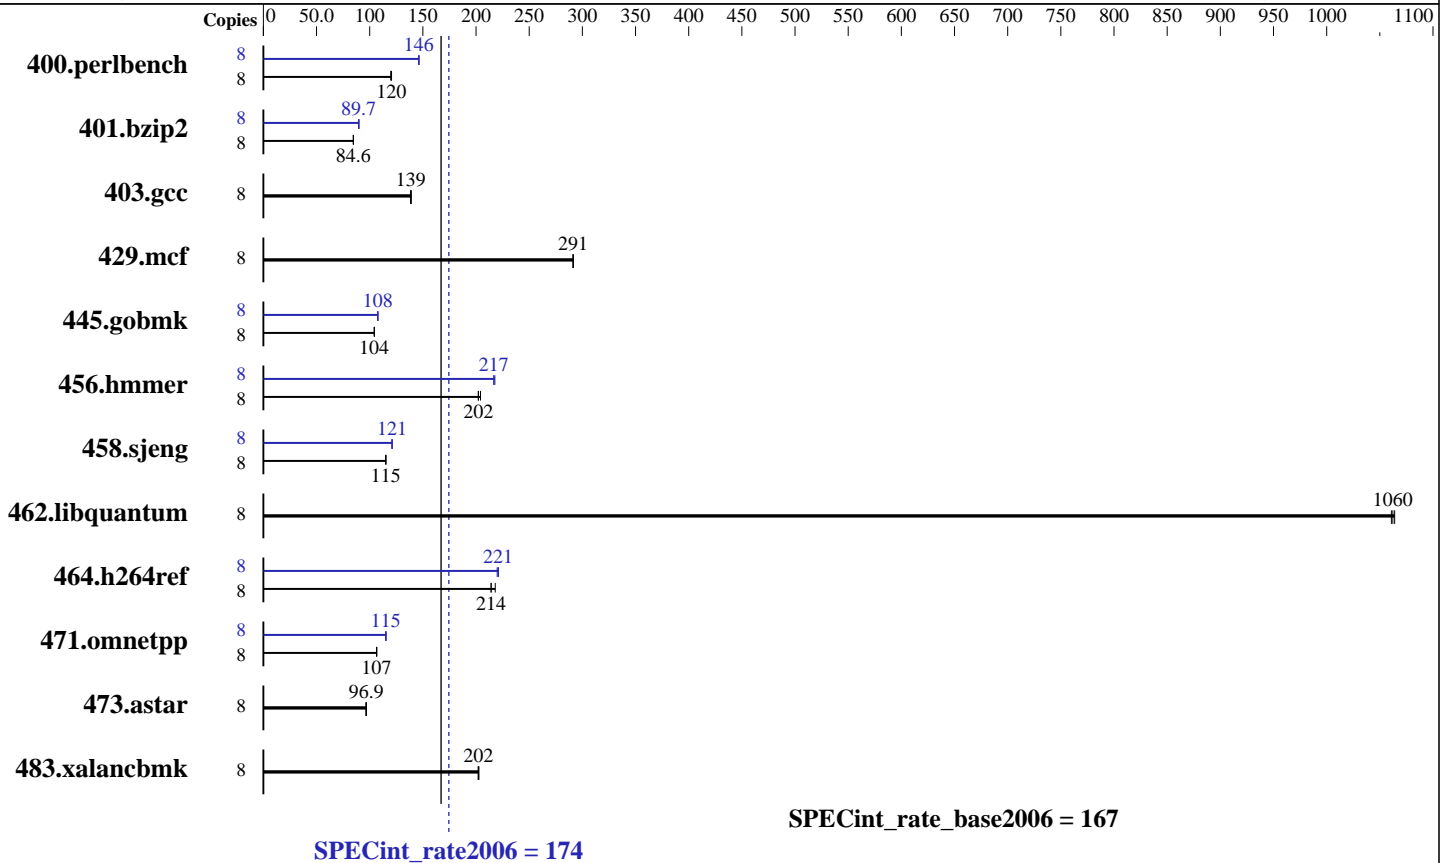

Hardware

CPU Name: Intel Xeon E5-2603
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16 x 4 GB 2Rx8 PC3-10600R-11, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 3 x 300 GB, SAS, 15000 RPM, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server Release 6.3, 2.6.32-279.el6.x86_64
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 174

Servidor Itaotec MX205 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jan-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	648	121	653	120	649	120	8	534	146	534	146	535	146
401.bzip2	8	912	84.6	912	84.6	912	84.7	8	861	89.7	859	89.9	860	89.7
403.gcc	8	465	139	463	139	465	139	8	465	139	463	139	465	139
429.mcf	8	250	291	251	291	250	291	8	250	291	251	291	250	291
445.gobmk	8	804	104	804	104	804	104	8	779	108	780	108	779	108
456.hammer	8	365	204	369	202	369	202	8	344	217	344	217	343	218
458.sjeng	8	841	115	841	115	840	115	8	800	121	800	121	800	121
462.libquantum	8	156	1060	156	1060	156	1060	8	156	1060	156	1060	156	1060
464.h264ref	8	812	218	827	214	826	214	8	805	220	801	221	802	221
471.omnetpp	8	470	106	469	107	469	107	8	433	115	434	115	435	115
473.astar	8	580	96.9	580	96.9	583	96.4	8	580	96.9	580	96.9	583	96.4
483.xalancbmk	8	272	203	273	202	273	202	8	272	203	273	202	273	202

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c
running on itaotec.fam5 Thu Jan 24 15:45:04 2013

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
2 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 174

Servidor Itautec MX205 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jan-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      65946096 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux itautec.fam5 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 24 15:42
```

```
SPEC is set to: /home/rcaneca/cpu2006
Filesystem      Type      Size Used Avail Use% Mounted on
/dev/mapper/vg_itautec-lv_home
                ext4      743G  2.1G  704G   1% /home
```

(End of data from sysinfo program)

General Notes

This result was measured on the Servidor Itautec MX205.
The Servidor Itautec MX205, the Servidor Itautec MX225+ and the Servidor Itautec LX205 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 174

Servidor Itaotec MX205 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jan-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32
400.perlbench: icc -m64
401.bzip2: icc -m64
456.hmmmer: icc -m64
458.sjeng: icc -m64
C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 174

Servidor Itaotec MX205 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jan-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
401.bzp2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias
403.gcc: basepeak = yes
429.mcf: basepeak = yes
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3
456.hmmcr: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto-ilp32
462.libquantum: basepeak = yes
464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap
473.astar: basepeak = yes
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 174

Servidor Itaotec MX205 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 167

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jan-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Itaotec-Servidor_Itaotec-Intel-Linux-Platform.html
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Itaotec-Servidor_Itaotec-Intel-Linux-Platform.xml
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:06:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 February 2013.