



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECint®\_rate2006 = 1760**

**Teecal Huawei RH5885 V2 (Intel Xeon E7-8850)**

**SPECint\_rate\_base2006 = 1690**

**CPU2006 license:** 3175


**Test date:** Aug-2013

**Test sponsor:** Huawei

**Hardware Availability:** Oct-2012

**Tested by:** Huawei

**Software Availability:** Oct-2012

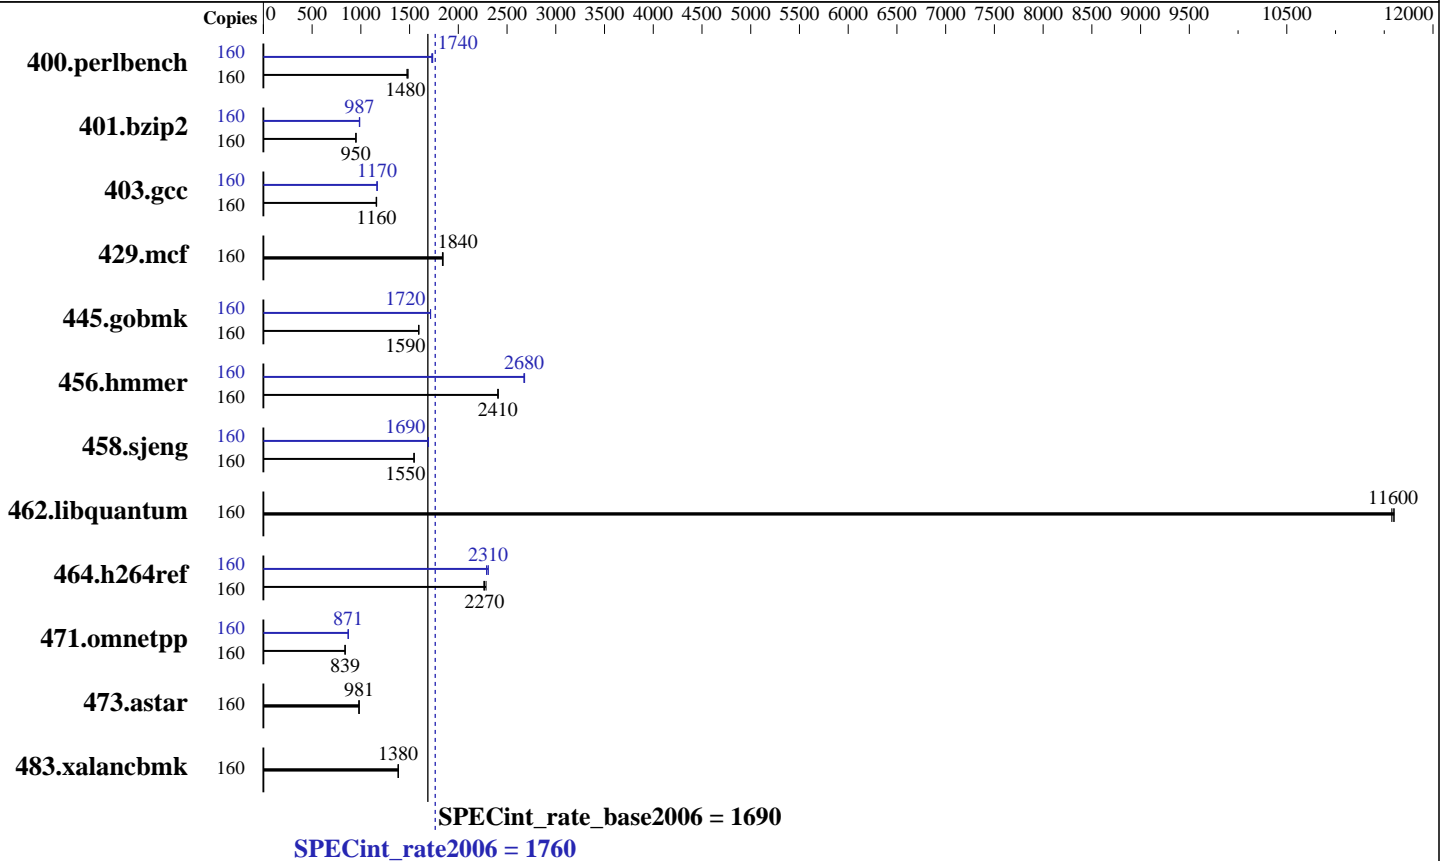

### Hardware

**CPU Name:** Intel Xeon E7-8850  
**CPU Characteristics:** Intel Turbo Boost Technology up to 2.40 GHz  
**CPU MHz:** 2000  
**FPU:** Integrated  
**CPU(s) enabled:** 80 cores, 8 chips, 10 cores/chip, 2 threads/core  
**CPU(s) orderable:** 8 chips  
**Primary Cache:** 32 KB I + 32 KB D on chip per core  
**Secondary Cache:** 256 KB I+D on chip per core  
**L3 Cache:** 24 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 2 TB (128 x 16 GB 4Rx4 PC3-10600R-9, ECC, running at 1066 MHz)  
**Disk Subsystem:** 2 x 300 GB SAS, 10K RPM  
**Other Hardware:** None

### Software

**Operating System:** Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
**Compiler:** C/C++: Version 13.0.0.079 of Intel C++ Studio XE for Linux  
**Auto Parallel:** No  
**File System:** ext4  
**System State:** Run level 3 (multi-user)  
**Base Pointers:** 32-bit  
**Peak Pointers:** 32/64-bit  
**Other Software:** Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint\_rate2006 = 1760

Tecal Huawei RH5885 V2 (Intel Xeon E7-8850)

SPECint\_rate\_base2006 = 1690

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Aug-2013  
Hardware Availability: Oct-2012  
Software Availability: Oct-2012

## Results Table

| Benchmark      | Base   |             |             |             |              |             |             | Peak   |             |            |            |              |             |             |
|----------------|--------|-------------|-------------|-------------|--------------|-------------|-------------|--------|-------------|------------|------------|--------------|-------------|-------------|
|                | Copies | Seconds     | Ratio       | Seconds     | Ratio        | Seconds     | Ratio       | Copies | Seconds     | Ratio      | Seconds    | Ratio        | Seconds     | Ratio       |
| 400.perlbench  | 160    | <b>1056</b> | <b>1480</b> | 1062        | 1470         | 1053        | 1480        | 160    | 900         | 1740       | 905        | 1730         | <b>901</b>  | <b>1740</b> |
| 401.bzip2      | 160    | <b>1626</b> | <b>950</b>  | 1627        | 949          | 1625        | 950         | 160    | <b>1564</b> | <b>987</b> | 1568       | 985          | 1563        | 988         |
| 403.gcc        | 160    | 1113        | 1160        | 1108        | 1160         | <b>1110</b> | <b>1160</b> | 160    | 1102        | 1170       | 1105       | 1170         | <b>1104</b> | <b>1170</b> |
| 429.mcf        | 160    | 794         | 1840        | <b>793</b>  | <b>1840</b>  | 792         | 1840        | 160    | 794         | 1840       | <b>793</b> | <b>1840</b>  | 792         | 1840        |
| 445.gobmk      | 160    | 1053        | 1590        | <b>1053</b> | <b>1590</b>  | 1053        | 1590        | 160    | 979         | 1710       | <b>979</b> | <b>1720</b>  | 978         | 1720        |
| 456.hammer     | 160    | 621         | 2410        | <b>620</b>  | <b>2410</b>  | 620         | 2410        | 160    | 557         | 2680       | <b>558</b> | <b>2680</b>  | 558         | 2670        |
| 458.sjeng      | 160    | <b>1252</b> | <b>1550</b> | 1253        | 1550         | 1251        | 1550        | 160    | 1145        | 1690       | 1143       | 1690         | <b>1143</b> | <b>1690</b> |
| 462.libquantum | 160    | 286         | 11600       | <b>286</b>  | <b>11600</b> | 286         | 11600       | 160    | 286         | 11600      | <b>286</b> | <b>11600</b> | 286         | 11600       |
| 464.h264ref    | 160    | <b>1561</b> | <b>2270</b> | 1565        | 2260         | 1550        | 2280        | 160    | 1535        | 2310       | 1547       | 2290         | <b>1536</b> | <b>2310</b> |
| 471.omnetpp    | 160    | <b>1193</b> | <b>839</b>  | 1193        | 838          | 1192        | 839         | 160    | 1150        | 869        | 1147       | 872          | <b>1148</b> | <b>871</b>  |
| 473.astar      | 160    | <b>1145</b> | <b>981</b>  | 1146        | 980          | 1143        | 983         | 160    | <b>1145</b> | <b>981</b> | 1146       | 980          | 1143        | 983         |
| 483.xalancbmk  | 160    | 799         | 1380        | 797         | 1380         | <b>798</b>  | <b>1380</b> | 160    | 799         | 1380       | 797        | 1380         | <b>798</b>  | <b>1380</b> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Power Technology set to Custom, Performance/Watt set to Traditional, Disable C3/C6 state  
Sysinfo program /speccpu/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on huawei5885 Fri Aug 2 16:23:06 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-8850 @ 2.00GHz  
8 "physical id"s (chips)  
160 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint\_rate2006 = 1760

Teal Huawei RH5885 V2 (Intel Xeon E7-8850)

SPECint\_rate\_base2006 = 1690

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Aug-2013  
Hardware Availability: Oct-2012  
Software Availability: Oct-2012

### Platform Notes (Continued)

```
cpu cores : 10
siblings  : 20
physical 0: cores 0 1 2 8 9 16 17 18 24 25
physical 1: cores 0 1 2 8 9 16 17 18 24 25
physical 2: cores 0 1 2 8 9 16 17 18 24 25
physical 3: cores 0 1 2 8 9 16 17 18 24 25
physical 4: cores 0 1 2 8 9 16 17 18 24 25
physical 5: cores 0 1 2 8 9 16 17 18 24 25
physical 6: cores 0 1 2 8 9 16 17 18 24 25
physical 7: cores 0 1 2 8 9 16 17 18 24 25
cache size : 24576 KB
```

```
From /proc/meminfo
MemTotal:      2117588376 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux huawei5885 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 2 11:59
```

```
SPEC is set to: /speccpu
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       ext4      500G  7.6G  467G   2% /speccpu
```

```
Additional information from dmidecode:
Memory:
128x Samsung M393B2K70CM0-CH9 16 GB 1067 MHz 4 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/speccpu/libs/32:/speccpu/libs/64"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.4

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1760

Teecal Huawei RH5885 V2 (Intel Xeon E7-8850)

SPECint\_rate\_base2006 = 1690

CPU2006 license: 3175

Test date: Aug-2013

Test sponsor: Huawei

Hardware Availability: Oct-2012

Tested by: Huawei

Software Availability: Oct-2012

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/speccpu/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1760

Teal Huawei RH5885 V2 (Intel Xeon E7-8850)

SPECint\_rate\_base2006 = 1690

CPU2006 license: 3175

Test date: Aug-2013

Test sponsor: Huawei

Hardware Availability: Oct-2012

Tested by: Huawei

Software Availability: Oct-2012

## Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1760

Teal Huawei RH5885 V2 (Intel Xeon E7-8850)

SPECint\_rate\_base2006 = 1690

CPU2006 license: 3175

Test date: Aug-2013

Test sponsor: Huawei

Hardware Availability: Oct-2012

Tested by: Huawei

Software Availability: Oct-2012

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/speccpu/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:46:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 August 2013.