



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint®_rate2006 = 428

I620-G10 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

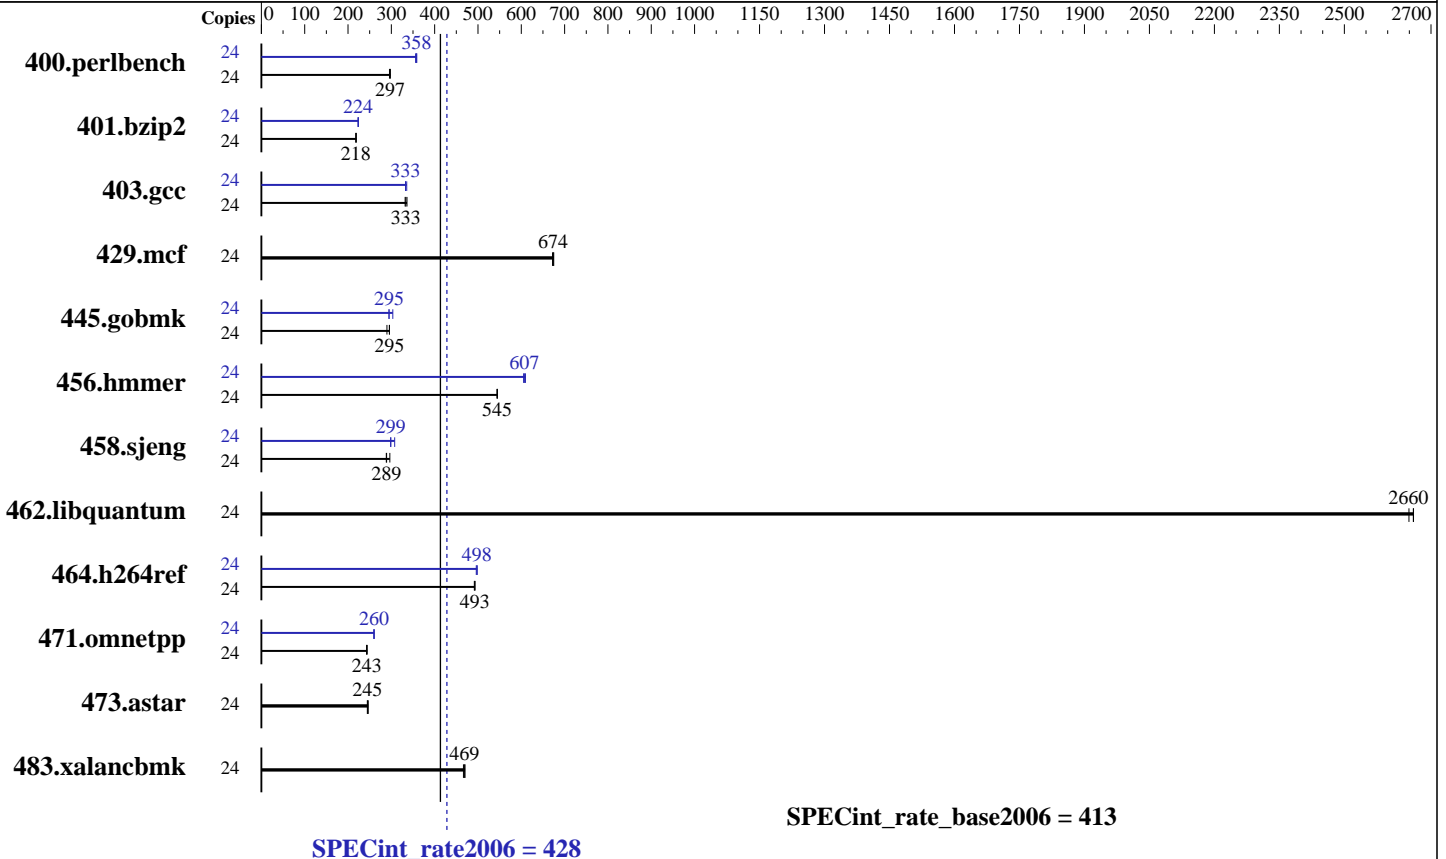

Hardware

CPU Name: Intel Xeon E5-2620 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL7)
 Disk Subsystem: 1 X 2 TB SATA 7200 RPM, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 428

I620-G10 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Dec-2013
Hardware Availability: Jan-2014
Software Availability: Jan-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	788	298	<u>789</u>	<u>297</u>	793	296	24	654	359	<u>654</u>	<u>358</u>	659	356
401.bzip2	24	1057	219	<u>1061</u>	<u>218</u>	1062	218	24	1035	224	1037	223	<u>1036</u>	<u>224</u>
403.gcc	24	575	336	<u>579</u>	<u>333</u>	582	332	24	576	336	<u>580</u>	<u>333</u>	581	333
429.mcf	24	324	675	326	672	<u>325</u>	<u>674</u>	24	324	675	326	672	<u>325</u>	<u>674</u>
445.gobmk	24	851	296	<u>852</u>	<u>295</u>	869	290	24	855	295	<u>854</u>	<u>295</u>	830	303
456.hammer	24	411	545	412	544	<u>411</u>	<u>545</u>	24	<u>369</u>	<u>607</u>	370	605	367	610
458.sjeng	24	<u>1005</u>	<u>289</u>	1007	288	979	297	24	973	298	<u>972</u>	<u>299</u>	944	308
462.libquantum	24	187	2660	188	2650	<u>187</u>	<u>2660</u>	24	187	2660	188	2650	<u>187</u>	<u>2660</u>
464.h264ref	24	1080	492	<u>1078</u>	<u>493</u>	1077	493	24	1066	498	<u>1067</u>	<u>498</u>	1071	496
471.omnetpp	24	<u>616</u>	<u>243</u>	618	243	614	244	24	<u>577</u>	<u>260</u>	576	260	578	260
473.astar	24	<u>687</u>	<u>245</u>	683	247	689	245	24	<u>687</u>	<u>245</u>	683	247	689	245
483.xalancbmk	24	<u>353</u>	<u>469</u>	352	470	355	466	24	<u>353</u>	<u>469</u>	352	470	355	466

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
Intel Virtualization technology set to disabled
Power Technology set to performance
Turbo boost set to enabled
DDR Speed set to force 1600
Sysinfo program /home/cpu2006/config/sysinfo.rev6874
\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998
running on cpu2006 Sat Dec 14 00:56:59 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2620 v2 @ 2.10GHz
2 "physical id"s (chips)
24 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 428

I620-G10 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Dec-2013
Hardware Availability: Jan-2014
Software Availability: Jan-2014

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264500324 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux cpu2006 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 13 23:35
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_cpu2006-lv_home
                ext4      1.8T  7.8G  1.7T   1% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.0a 10/10/2013

Memory:
16x Hynix Semiconducto HMT42GR7AFR4C 16 GB 1 rank 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 428

I620-G10 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

General Notes (Continued)

```

memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```

Base Compiler Invocation

```

C benchmarks:
  icc -m32

C++ benchmarks:
  icpc -m32

```

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

```

Base Optimization Flags

```

C benchmarks:
  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
  -Wl,-z,muldefs -L/sh -lsmarthearp

```

Base Other Flags

```

C benchmarks:
  403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

```

C benchmarks (except as noted below):
  icc -m32

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 428

I620-G10 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046

Test date: Dec-2013

Test sponsor: Sugon

Hardware Availability: Jan-2014

Tested by: Sugon

Software Availability: Jan-2014

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 428

I620-G10 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 413

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:51:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 January 2014.