



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint®2006 = 34.5

## Huawei CH242 (Intel Xeon E7-4850)

SPECint\_base2006 = 31.8

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Apr-2011

Software Availability: Nov-2013

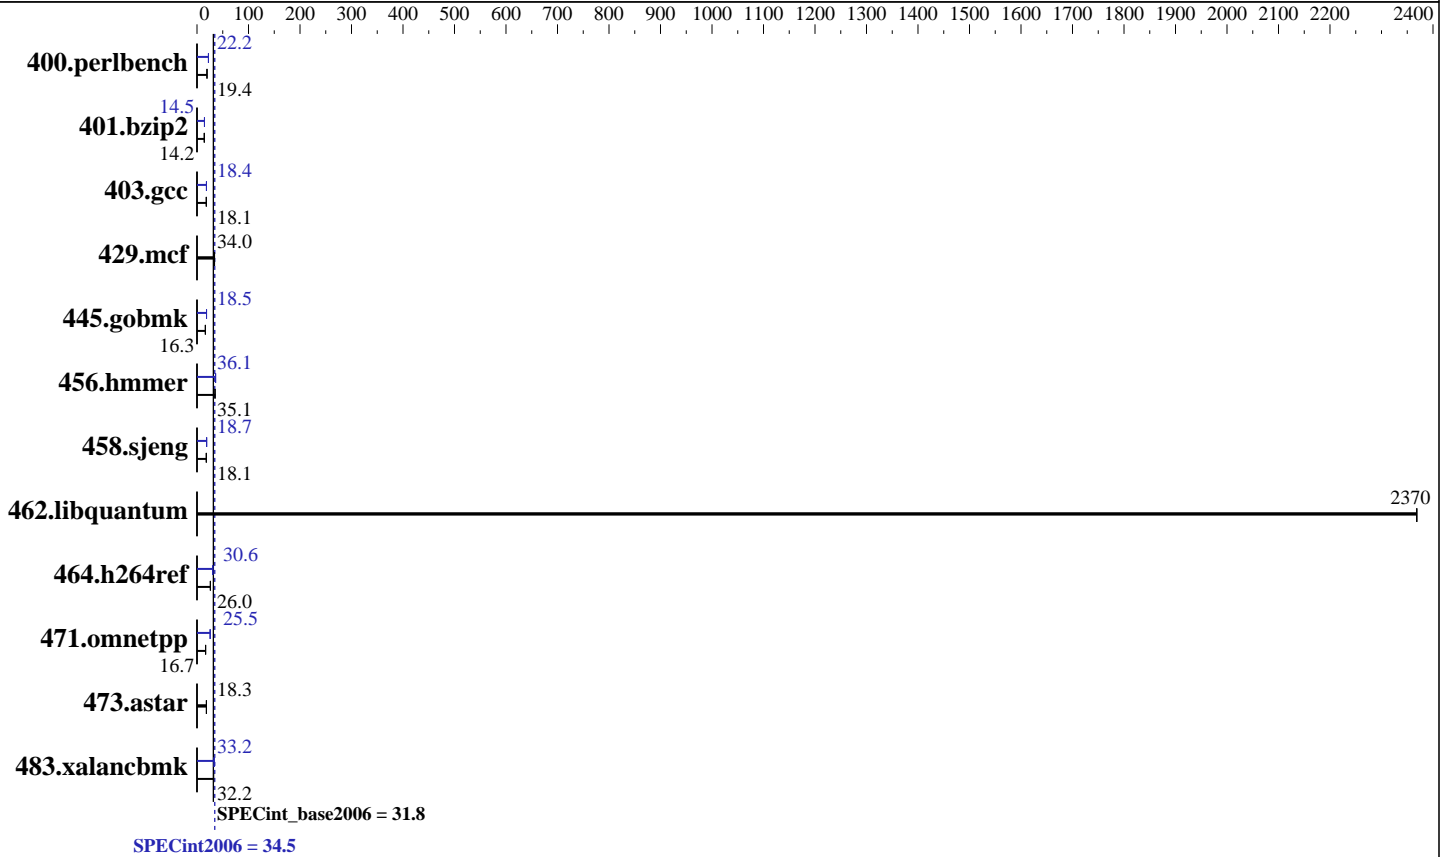

### Hardware

CPU Name: Intel Xeon E7-4850  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 24 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-10600R-09, ECC, running at 1067 MHz)  
 Disk Subsystem: 1 X 600 GB SAS 10000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 34.5

Huawei CH242 (Intel Xeon E7-4850)

SPECint\_base2006 = 31.8

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Aug-2014  
Hardware Availability: Apr-2011  
Software Availability: Nov-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	503	19.4	<b>504</b>	<b>19.4</b>	504	19.4	439	22.3	<b>440</b>	<b>22.2</b>	440	22.2
401.bzip2	680	14.2	<b>681</b>	<b>14.2</b>	682	14.2	666	14.5	<b>666</b>	<b>14.5</b>	665	14.5
403.gcc	<b>444</b>	<b>18.1</b>	446	18.0	444	18.1	438	18.4	439	18.3	<b>439</b>	<b>18.4</b>
429.mcf	267	34.1	<b>268</b>	<b>34.0</b>	270	33.8	267	34.1	<b>268</b>	<b>34.0</b>	270	33.8
445.gobmk	644	16.3	647	16.2	<b>645</b>	<b>16.3</b>	567	18.5	567	18.5	<b>567</b>	<b>18.5</b>
456.hammer	266	35.1	269	34.6	<b>266</b>	<b>35.1</b>	<b>258</b>	<b>36.1</b>	260	35.9	258	36.2
458.sjeng	668	18.1	669	18.1	<b>668</b>	<b>18.1</b>	648	18.7	<b>647</b>	<b>18.7</b>	647	18.7
462.libquantum	8.75	2370	8.75	2370	<b>8.75</b>	<b>2370</b>	8.75	2370	8.75	2370	<b>8.75</b>	<b>2370</b>
464.h264ref	<b>852</b>	<b>26.0</b>	852	26.0	851	26.0	723	30.6	<b>722</b>	<b>30.6</b>	722	30.7
471.omnetpp	373	16.8	375	16.7	<b>374</b>	<b>16.7</b>	242	25.8	245	25.5	<b>245</b>	<b>25.5</b>
473.astar	385	18.2	383	18.3	<b>384</b>	<b>18.3</b>	385	18.2	383	18.3	<b>384</b>	<b>18.3</b>
483.xalancbmk	<b>214</b>	<b>32.2</b>	216	32.0	213	32.4	207	33.3	208	33.2	<b>208</b>	<b>33.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

```
BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Sysinfo program /spec/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Mon Aug 18 05:57:15 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7- 4850 @ 2.00GHz
 4 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 10
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 34.5

Huawei CH242 (Intel Xeon E7-4850)

SPECint\_base2006 = 31.8

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Aug-2014  
Hardware Availability: Apr-2011  
Software Availability: Nov-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 8 9 16 17 18 24 25
physical 1: cores 0 1 2 8 9 16 17 18 24 25
physical 2: cores 0 1 2 8 9 16 17 18 24 25
physical 3: cores 0 1 2 8 9 16 17 18 24 25
cache size : 24576 KB
```

```
From /proc/meminfo
MemTotal:      264380712 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 18 05:55
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  547G  176G  344G  34% /
```

```
Additional information from dmidecode:
Memory:
32x RAMAXEL RMS6031EC64FAF1333 8 GB 1067 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,0,1"  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"  
OMP\_NUM\_THREADS = "40"

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 34.5

Huawei CH242 (Intel Xeon E7-4850)

SPECint\_base2006 = 31.8

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Apr-2011

Software Availability: Nov-2013

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/opt/cpu2006/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>Huawei</b>	<b>SPECint2006 =</b>	<b>34.5</b>
<b>Huawei CH242 (Intel Xeon E7-4850)</b>	<b>SPECint_base2006 =</b>	<b>31.8</b>

**CPU2006 license:** 3175  
**Test sponsor:** Huawei  
**Tested by:** Huawei

**Test date:** Aug-2014  
**Hardware Availability:** Apr-2011  
**Software Availability:** Nov-2013

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/opt/cpu2006/smartheap -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECint2006 =	34.5
Huawei CH242 (Intel Xeon E7-4850)	SPECint_base2006 =	31.8

CPU2006 license: 3175	Test date:	Aug-2014
Test sponsor: Huawei	Hardware Availability:	Apr-2011
Tested by: Huawei	Software Availability:	Nov-2013

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/opt/cpu2006/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
 For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
 Report generated on Wed Sep 24 16:18:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
 Originally published on 24 September 2014.