



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

### SPECint<sup>®</sup>\_rate2006 = 739

ACTINA SOLAR 202 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)

### SPECint\_rate\_base2006 = 708

CPU2006 license: 9008


Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Oct-2014

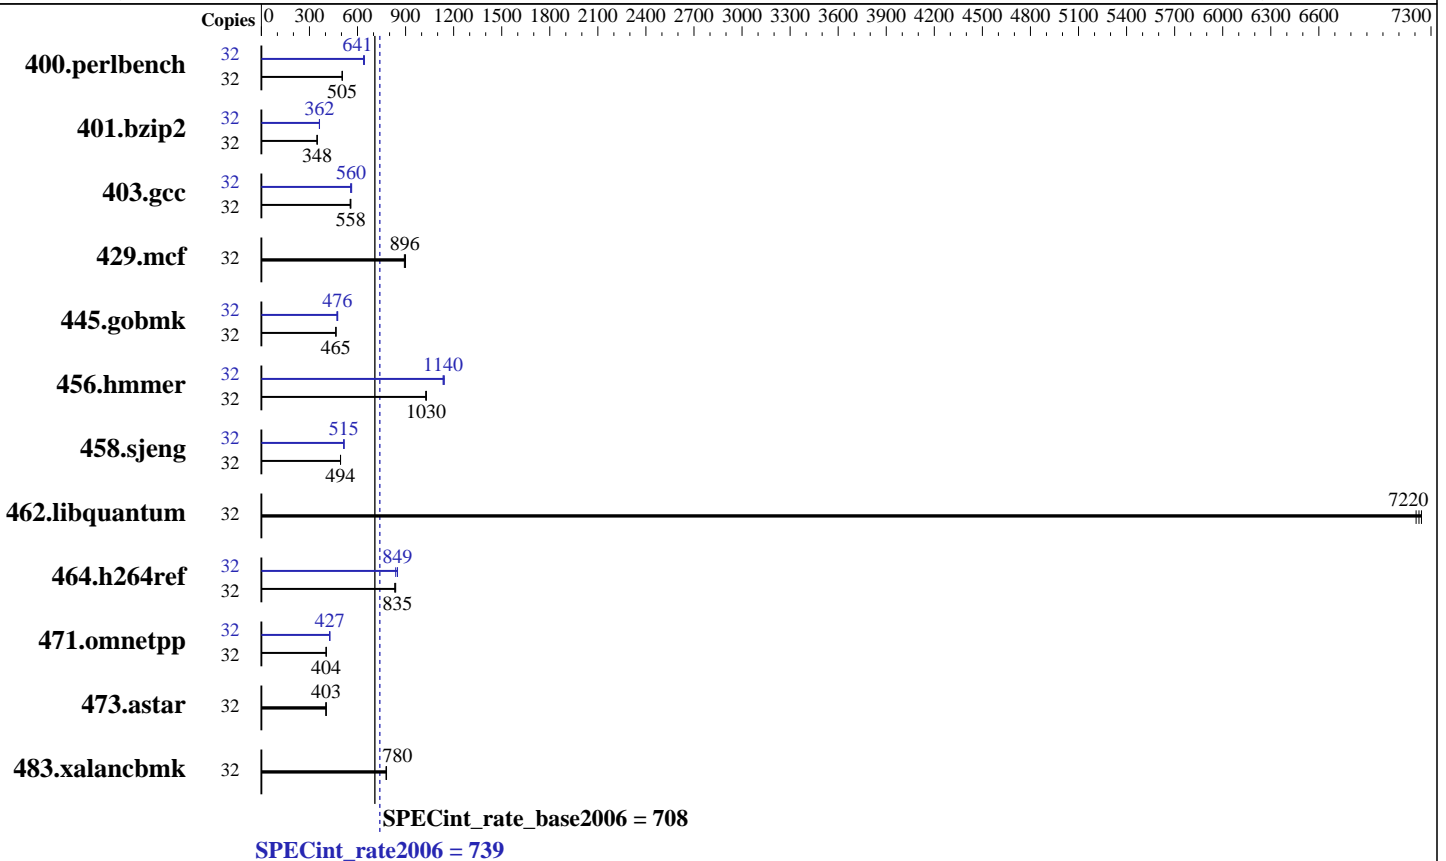

### Hardware

CPU Name: Intel Xeon E5-2640 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 240 GB SATA II SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)  
 2.6.32-504.8.1.el6.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 202 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)

SPECint\_rate2006 = 739

SPECint\_rate\_base2006 = 708

CPU2006 license: 9008  
Test sponsor: ACTION S.A.  
Tested by: ACTION S.A.

Test date: Mar-2015  
Hardware Availability: Sep-2014  
Software Availability: Oct-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	621	504	<b>619</b>	<b>505</b>	618	506	32	486	643	<b>488</b>	<b>641</b>	490	638
401.bzip2	32	885	349	<b>887</b>	<b>348</b>	888	348	32	<b>852</b>	<b>362</b>	853	362	851	363
403.gcc	32	<b>462</b>	<b>558</b>	462	558	465	554	32	457	564	462	557	<b>460</b>	<b>560</b>
429.mcf	32	327	892	324	900	<b>326</b>	<b>896</b>	32	327	892	324	900	<b>326</b>	<b>896</b>
445.gobmk	32	722	465	721	466	<b>722</b>	<b>465</b>	32	705	476	713	471	<b>706</b>	<b>476</b>
456.hammer	32	290	1030	291	1030	<b>290</b>	<b>1030</b>	32	<b>263</b>	<b>1140</b>	263	1130	261	1140
458.sjeng	32	783	494	784	494	<b>784</b>	<b>494</b>	32	750	516	<b>752</b>	<b>515</b>	753	514
462.libquantum	32	<b>91.8</b>	<b>7220</b>	91.6	7240	92.0	7210	32	<b>91.8</b>	<b>7220</b>	91.6	7240	92.0	7210
464.h264ref	32	845	838	851	833	<b>848</b>	<b>835</b>	32	<b>835</b>	<b>849</b>	833	850	845	838
471.omnetpp	32	<b>495</b>	<b>404</b>	493	406	495	404	32	468	427	470	425	<b>468</b>	<b>427</b>
473.astar	32	<b>557</b>	<b>403</b>	555	405	557	403	32	<b>557</b>	<b>403</b>	555	405	557	403
483.xalancbmk	32	284	778	283	781	<b>283</b>	<b>780</b>	32	284	778	283	781	<b>283</b>	<b>780</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Bios Settings  
Power Technology = Energy Efficient  
Enforce POR = Disabled

BMC Setting  
Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on SUT Mon Mar 23 17:02:46 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

**SPECint\_rate2006 = 739**

ACTINA SOLAR 202 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)

**SPECint\_rate\_base2006 = 708**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Oct-2014

### Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E5-2640 v3 @ 2.60GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      264425916 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.6 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.6 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux SUT 2.6.32-504.8.1.el6.x86_64 #1 SMP Wed Mar 11 12:12:13 CET 2015
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 23 17:01

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda1       ext4      212G      36G  165G  18% /

```

```

Additional information from dmidecode:
BIOS American Megatrends Inc. 1.0c 02/12/2015
Memory:
16x 16 GB
2x Samsung(date:14/33) M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank
14x Samsung(date:14/40) M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank

```

```

(End of data from sysinfo program)
dmidecode does not properly detect memory modules
16 modules of 16 GB were used to run the test (256 GB total)

```

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint\_rate2006 = 739**

ACTINA SOLAR 202 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)

**SPECint\_rate\_base2006 = 708**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Oct-2014

## General Notes (Continued)

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory  
using RedHat EL 6.6

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32  
462.libquantum: -DSPEC_CPU_LINUX  
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint\_rate2006 = 739**

ACTINA SOLAR 202 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)

**SPECint\_rate\_base2006 = 708**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Oct-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 202 S6 (Intel Xeon E5-2640 v3, 2.60 GHz)

SPECint\_rate2006 = 739

SPECint\_rate\_base2006 = 708

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2015

Hardware Availability: Sep-2014

Software Availability: Oct-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Apr 21 18:21:54 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 April 2015.