



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc Orion HF620-G3

SPECint®_rate2006 = 1030

SPECint_rate_base2006 = 993

CPU2006 license: 4531


Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Feb-2015

Software Availability: Aug-2015

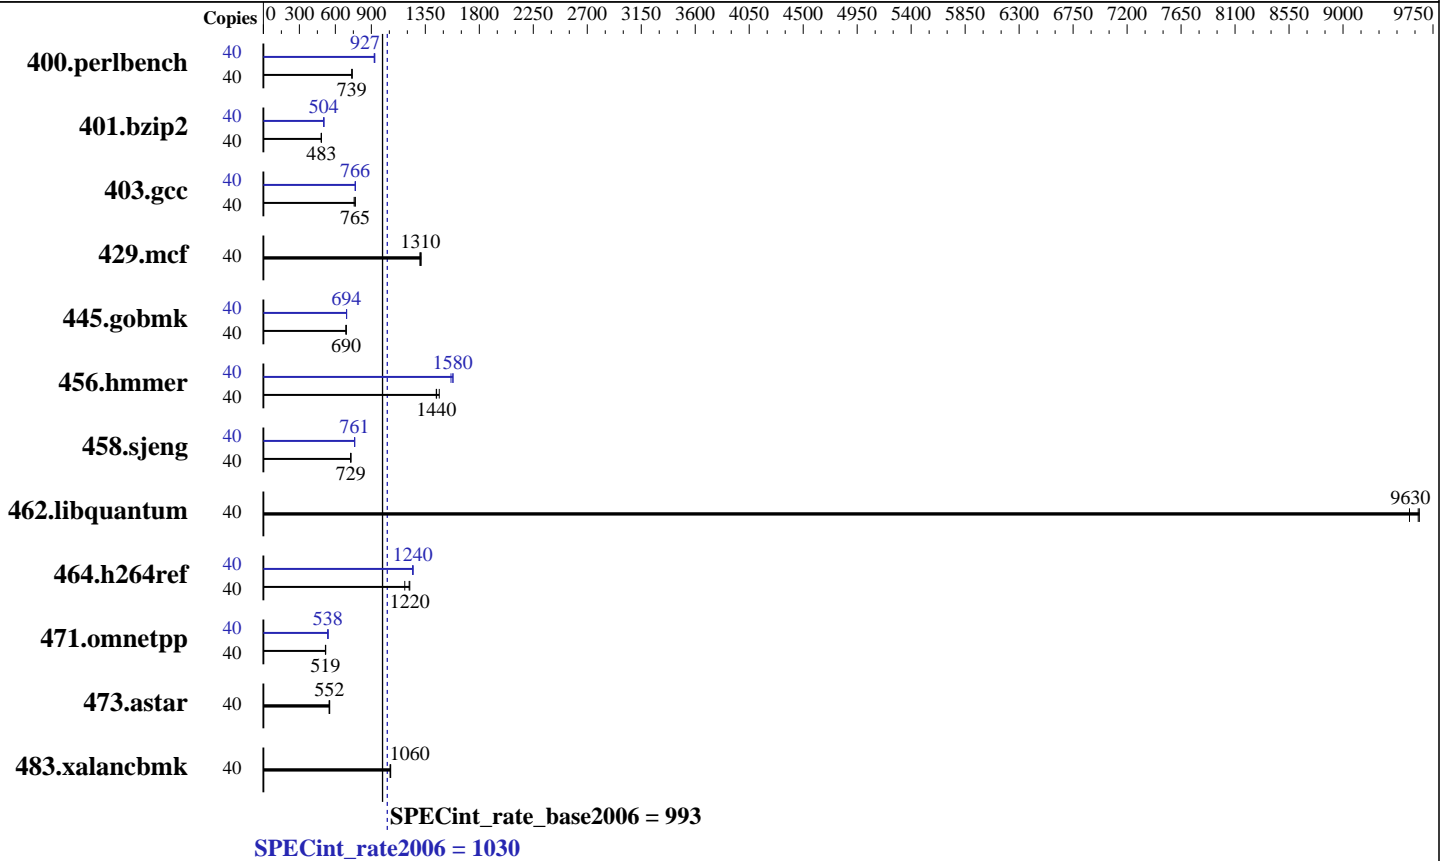

Hardware

CPU Name: Intel Xeon E5-2687W v3
 CPU Characteristics: Intel Turbo Boost Technology disabled
 CPU MHz: 3324
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1x 400 GB SATA SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc
Orion HF620-G3

SPECint_rate2006 = 1030

SPECint_rate_base2006 = 993

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Feb-2015

Software Availability: Aug-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	528	740	<u>529</u>	<u>739</u>	530	737	40	421	929	423	924	<u>421</u>	<u>927</u>
401.bzip2	40	800	482	<u>798</u>	<u>483</u>	798	484	40	<u>766</u>	<u>504</u>	768	503	765	504
403.gcc	40	<u>421</u>	<u>765</u>	426	757	421	766	40	<u>420</u>	<u>766</u>	420	767	420	766
429.mcf	40	280	1300	277	1320	<u>278</u>	<u>1310</u>	40	280	1300	277	1320	<u>278</u>	<u>1310</u>
445.gobmk	40	610	688	<u>608</u>	<u>690</u>	608	691	40	<u>605</u>	<u>694</u>	606	693	605	694
456.hammer	40	<u>258</u>	<u>1440</u>	259	1440	255	1470	40	239	1560	236	1580	<u>236</u>	<u>1580</u>
458.sjeng	40	<u>664</u>	<u>729</u>	664	729	665	728	40	637	760	<u>636</u>	<u>761</u>	636	761
462.libquantum	40	86.0	9640	<u>86.1</u>	<u>9630</u>	86.7	9550	40	86.0	9640	<u>86.1</u>	<u>9630</u>	86.7	9550
464.h264ref	40	751	1180	725	1220	<u>728</u>	<u>1220</u>	40	709	1250	<u>711</u>	<u>1240</u>	711	1240
471.omnetpp	40	482	519	483	517	<u>482</u>	<u>519</u>	40	466	536	463	540	<u>465</u>	<u>538</u>
473.astar	40	<u>509</u>	<u>552</u>	513	548	508	552	40	<u>509</u>	<u>552</u>	513	548	508	552
483.xalancbmk	40	260	1060	<u>261</u>	<u>1060</u>	261	1060	40	260	1060	<u>261</u>	<u>1060</u>	261	1060

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Wed Apr 8 10:24:01 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2687W v3 @ 3.10GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 5
siblings : 10
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
Continued on next page
```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc
Orion HF620-G3

SPECint_rate2006 = 1030

SPECint_rate_base2006 = 993

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Feb-2015

Software Availability: Aug-2015

Platform Notes (Continued)

cache size : 12800 KB

From /proc/meminfo

```
MemTotal:      263864244 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

os-release:

```
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
```

redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:

```
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 8 10:23 last=5

SPEC is set to: /usr/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs  368G   92G  277G  25% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0902 01/28/2015

Memory:

16x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB

memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc
Orion HF620-G3

SPECint_rate2006 = 1030

SPECint_rate_base2006 = 993

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Feb-2015

Software Availability: Aug-2015

General Notes (Continued)

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc
Orion HF620-G3

SPECint_rate2006 = 1030

SPECint_rate_base2006 = 993

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Feb-2015

Software Availability: Aug-2015

Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hypertechnologies Ciara, Inc
Orion HF620-G3

SPECint_rate2006 = 1030

SPECint_rate_base2006 = 993

CPU2006 license: 4531

Test sponsor: Hypertechnologies Ciara, Inc

Tested by: Hypertechnologies Ciara, Inc

Test date: Apr-2015

Hardware Availability: Feb-2015

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 17 10:47:42 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 June 2015.