



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint®_rate2006 = 493

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECint_rate_base2006 = 470

CPU2006 license: 3834


Test sponsor: ZTE

Tested by: ZTE

Test date: Aug-2015

Hardware Availability: Sep-2013

Software Availability: Sep-2014

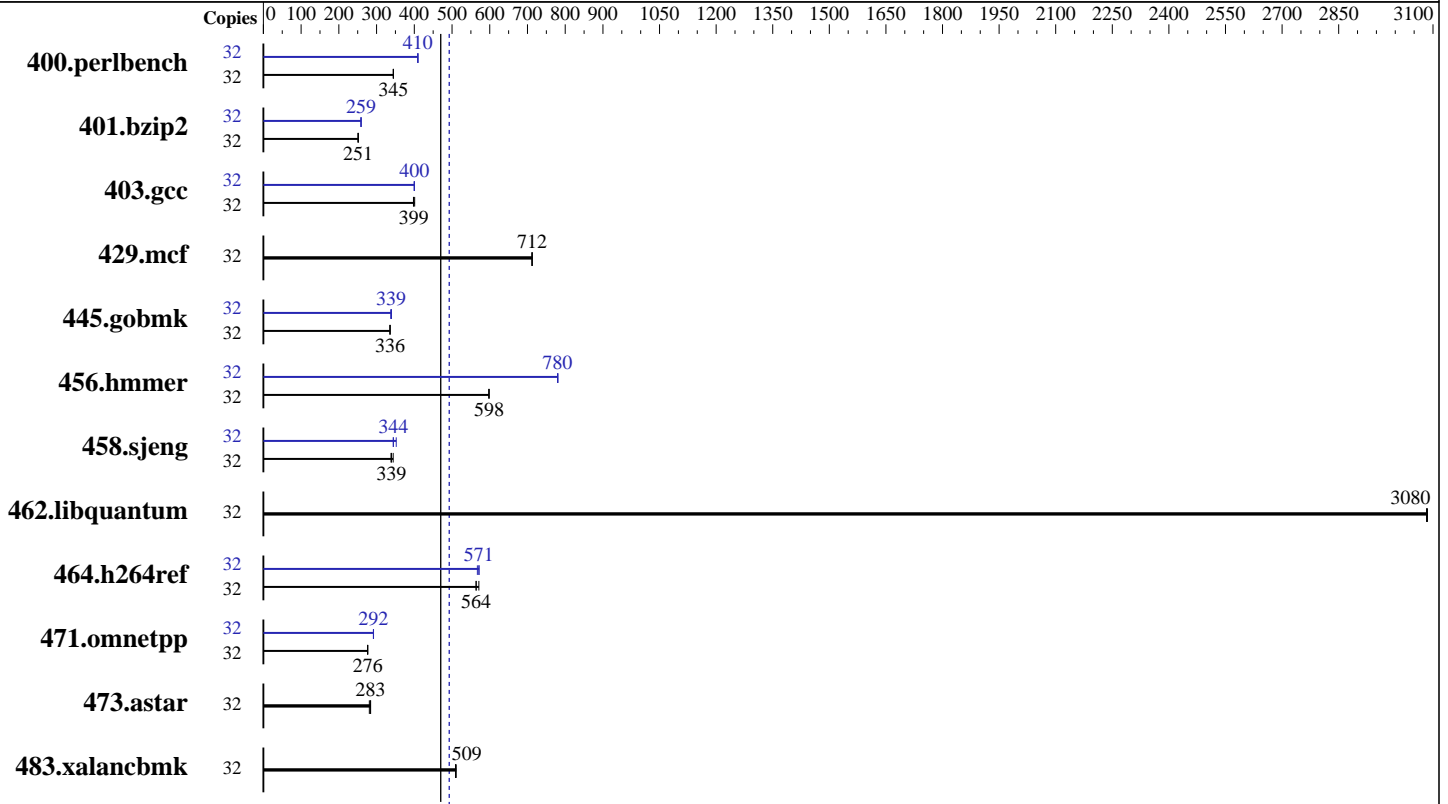

SPECint_rate2006 = 493

SPECint_rate_base2006 = 470

Hardware

CPU Name: Intel Xeon E5-2628L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-10600R-9 ECC)
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.0(Maipo) 3.10.0-121.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint_rate2006 = 493

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECint_rate_base2006 = 470

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Aug-2015

Hardware Availability: Sep-2013

Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	907	345	909	344	<u>907</u>	<u>345</u>	32	<u>763</u>	<u>410</u>	764	409	763	410
401.bzip2	32	1227	252	<u>1228</u>	<u>251</u>	1232	251	32	1192	259	1194	259	<u>1193</u>	<u>259</u>
403.gcc	32	642	401	<u>646</u>	<u>399</u>	648	398	32	644	400	644	400	<u>644</u>	<u>400</u>
429.mcf	32	410	712	<u>410</u>	<u>712</u>	409	713	32	410	712	<u>410</u>	<u>712</u>	409	713
445.gobmk	32	999	336	<u>1000</u>	<u>336</u>	1001	335	32	994	338	<u>990</u>	<u>339</u>	989	340
456.hammer	32	500	598	499	598	<u>499</u>	<u>598</u>	32	382	781	<u>383</u>	<u>780</u>	383	780
458.sjeng	32	<u>1141</u>	<u>339</u>	1144	338	1126	344	32	<u>1124</u>	<u>344</u>	1124	344	1100	352
462.libquantum	32	215	3080	<u>215</u>	<u>3080</u>	215	3090	32	215	3080	<u>215</u>	<u>3080</u>	215	3090
464.h264ref	32	1240	571	<u>1255</u>	<u>564</u>	1257	564	32	1249	567	<u>1240</u>	<u>571</u>	1239	572
471.omnetpp	32	723	277	<u>723</u>	<u>276</u>	724	276	32	<u>685</u>	<u>292</u>	686	292	685	292
473.astar	32	790	284	<u>792</u>	<u>283</u>	800	281	32	790	284	<u>792</u>	<u>283</u>	800	281
483.xalancbmk	32	432	511	434	509	<u>434</u>	<u>509</u>	32	432	511	434	509	<u>434</u>	<u>509</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Turbo boost Technology enabled

Virtualization Technology disabled

Hyper Threading Technology enabled

Sysinfo program /home/speccpu/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ 2b55956e7c0e338e808a36a21505f13a

running on localhost.localdomain Thu Aug 6 08:26:33 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2628L v2 @ 1.90GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint_rate2006 = 493

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECint_rate_base2006 = 470

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Aug-2015

Hardware Availability: Sep-2013

Software Availability: Sep-2014

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      131796012 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-121.el7.x86_64 #1 SMP Tue Apr 8 10:48:19
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 6 08:23

SPEC is set to: /home/speccpu

```
Filesystem      Type Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  225G  19G  206G   9% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. CORE4.6.5_UBF3.10.49_SVN57833 05/06/2015

Memory:

8x Micron 36KSF2G72PZ-1 16 GB 2 rank 1333 MHz

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint_rate2006 = 493

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECint_rate_base2006 = 470

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Aug-2015

Hardware Availability: Sep-2013

Software Availability: Sep-2014

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/speccpu/libs/32:/home/speccpu/libs/64:/home/speccpu/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint_rate2006 = 493

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECint_rate_base2006 = 470

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Aug-2015

Hardware Availability: Sep-2013

Software Availability: Sep-2014

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
```

```
401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias
```

```
403.gcc: -xAVX -ipo -O3 -no-prec-div
```

```
429.mcf: basepeak = yes
```

```
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3
```

```
456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
```

```
458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto-ilp32
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECint_rate2006 = 493

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECint_rate_base2006 = 470

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Aug-2015

Hardware Availability: Sep-2013

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ZTE-Platform-Flags-V2.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ZTE-Platform-Flags-V2.0.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 8 22:40:46 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 September 2015.