



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation DX20a-X (Intel Xeon D-1527)

SPECint®\_rate2006 = 172

SPECint\_rate\_base2006 = 165

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

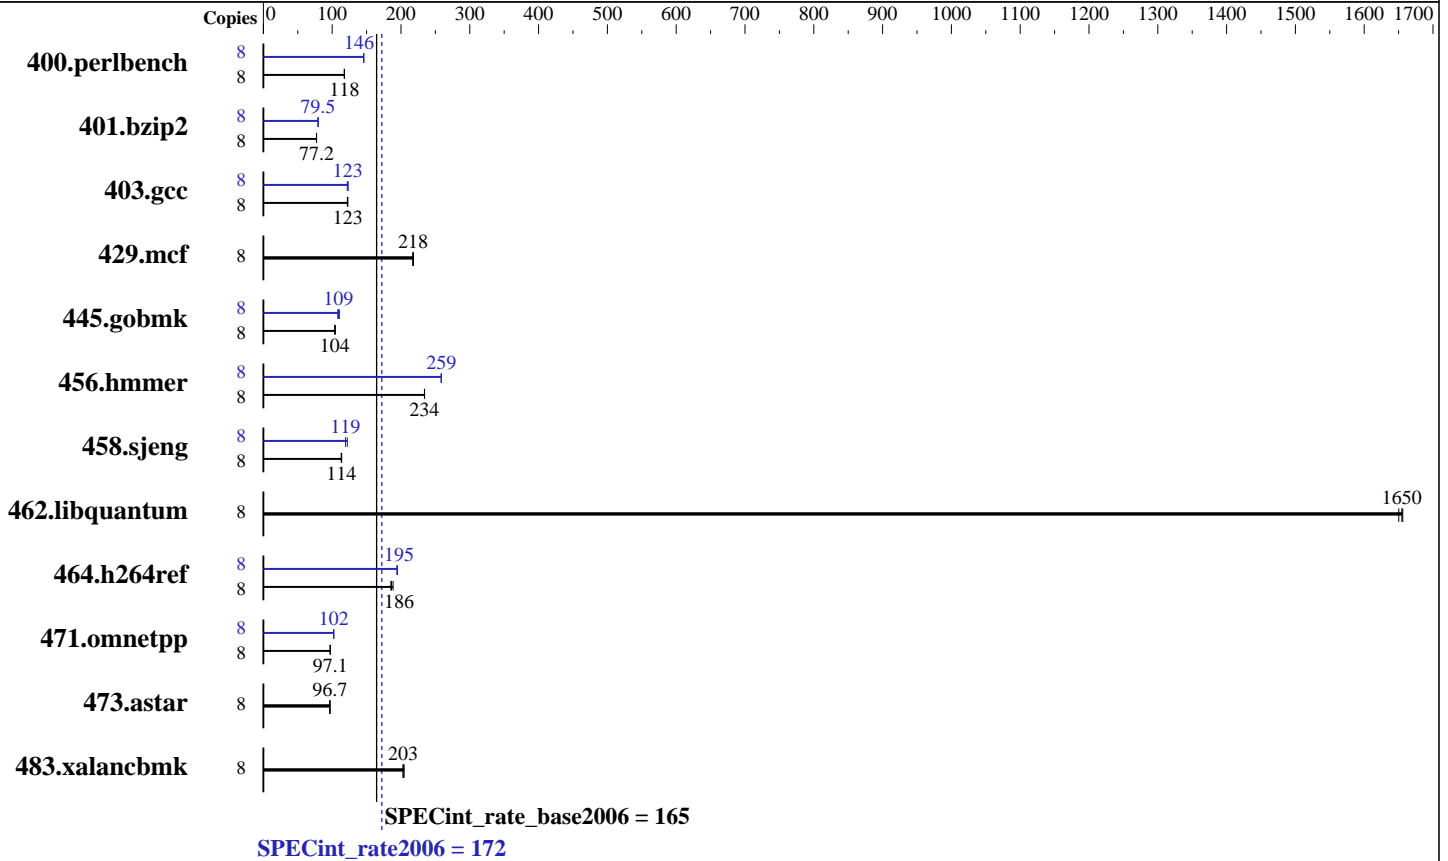

### Hardware

CPU Name: Intel Xeon D-1527  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-T)  
 Disk Subsystem: 1 x 512 GB SATA, SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 Kernel 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation  
DX20a-X (Intel Xeon D-1527)

SPECint\_rate2006 = 172  
SPECint\_rate\_base2006 = 165

CPU2006 license: 9006  
Test sponsor: NEC Corporation  
Tested by: NEC Corporation

Test date: Mar-2016  
Hardware Availability: Mar-2016  
Software Availability: Nov-2015

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>663</b>	<b>118</b>	663	118	665	118	8	535	146	<b>536</b>	<b>146</b>	537	146
401.bzip2	8	<b>1000</b>	<b>77.2</b>	999	77.3	1000	77.2	8	970	79.6	973	79.3	<b>971</b>	<b>79.5</b>
403.gcc	8	525	123	528	122	<b>525</b>	<b>123</b>	8	<b>524</b>	<b>123</b>	528	122	523	123
429.mcf	8	336	217	334	218	<b>335</b>	<b>218</b>	8	336	217	334	218	<b>335</b>	<b>218</b>
445.gobmk	8	803	105	<b>806</b>	<b>104</b>	808	104	8	<b>770</b>	<b>109</b>	776	108	759	111
456.hammer	8	319	234	<b>319</b>	<b>234</b>	319	234	8	288	259	<b>289</b>	<b>259</b>	289	258
458.sjeng	8	856	113	<b>853</b>	<b>114</b>	850	114	8	810	119	<b>810</b>	<b>119</b>	793	122
462.libquantum	8	<b>100</b>	<b>1650</b>	100	1660	100	1650	8	<b>100</b>	<b>1650</b>	100	1660	100	1650
464.h264ref	8	<b>951</b>	<b>186</b>	939	189	956	185	8	912	194	<b>910</b>	<b>195</b>	909	195
471.omnetpp	8	<b>515</b>	<b>97.1</b>	515	97.0	513	97.4	8	489	102	<b>489</b>	<b>102</b>	489	102
473.astar	8	<b>581</b>	<b>96.7</b>	582	96.5	580	96.8	8	<b>581</b>	<b>96.7</b>	582	96.5	580	96.8
483.xalancbmk	8	270	205	272	203	<b>272</b>	<b>203</b>	8	270	205	272	203	<b>272</b>	<b>203</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Power Management Policy: Custom  
Energy Performance: Performance  
Patrol Scrub: Disabled

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation  
DX20a-X (Intel Xeon D-1527)

SPECint\_rate2006 = 172  
SPECint\_rate\_base2006 = 165

CPU2006 license: 9006  
Test sponsor: NEC Corporation  
Tested by: NEC Corporation

Test date: Mar-2016  
Hardware Availability: Mar-2016  
Software Availability: Nov-2015

## Base Compiler Invocation

C benchmarks:  
icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin  
C++ benchmarks:  
icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**  
**DX20a-X (Intel Xeon D-1527)**

**SPECint\_rate2006 = 172**  
**SPECint\_rate\_base2006 = 165**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Mar-2016  
**Hardware Availability:** Mar-2016  
**Software Availability:** Nov-2015

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`  
401.bzip2: `icc -m64`  
456.hmmer: `icc -m64`  
458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

## Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`  
403.gcc: `-D_FILE_OFFSET_BITS=64`  
429.mcf: `-D_FILE_OFFSET_BITS=64`  
445.gobmk: `-D_FILE_OFFSET_BITS=64`  
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`  
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`  
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`  
464.h264ref: `-D_FILE_OFFSET_BITS=64`  
471.omnetpp: `-D_FILE_OFFSET_BITS=64`  
473.astar: `-D_FILE_OFFSET_BITS=64`  
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`  
`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`  
`-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32`  
401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`  
`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`  
`-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch`  
`-auto-ilp32 -ansi-alias`  
403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`  
429.mcf: `basepeak = yes`  
445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`  
`-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias`  
`-opt-mem-layout-trans=3`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**  
**DX20a-X (Intel Xeon D-1527)**

**SPECint\_rate2006 = 172**

**SPECint\_rate\_base2006 = 165**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Mar-2016  
**Hardware Availability:** Mar-2016  
**Software Availability:** Nov-2015

## Peak Optimization Flags (Continued)

456.hmmcr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-DX-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-DX-RevA.xml>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation  
DX20a-X (Intel Xeon D-1527)

SPECint\_rate2006 = 172

SPECint\_rate\_base2006 = 165

CPU2006 license: 9006  
Test sponsor: NEC Corporation  
Tested by: NEC Corporation

Test date: Mar-2016  
Hardware Availability: Mar-2016  
Software Availability: Nov-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jun 30 13:13:44 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 April 2016.