



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint®2006 = 62.4

Lenovo ThinkServer RD350
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECint_base2006 = 59.5

CPU2006 license: 9017


Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

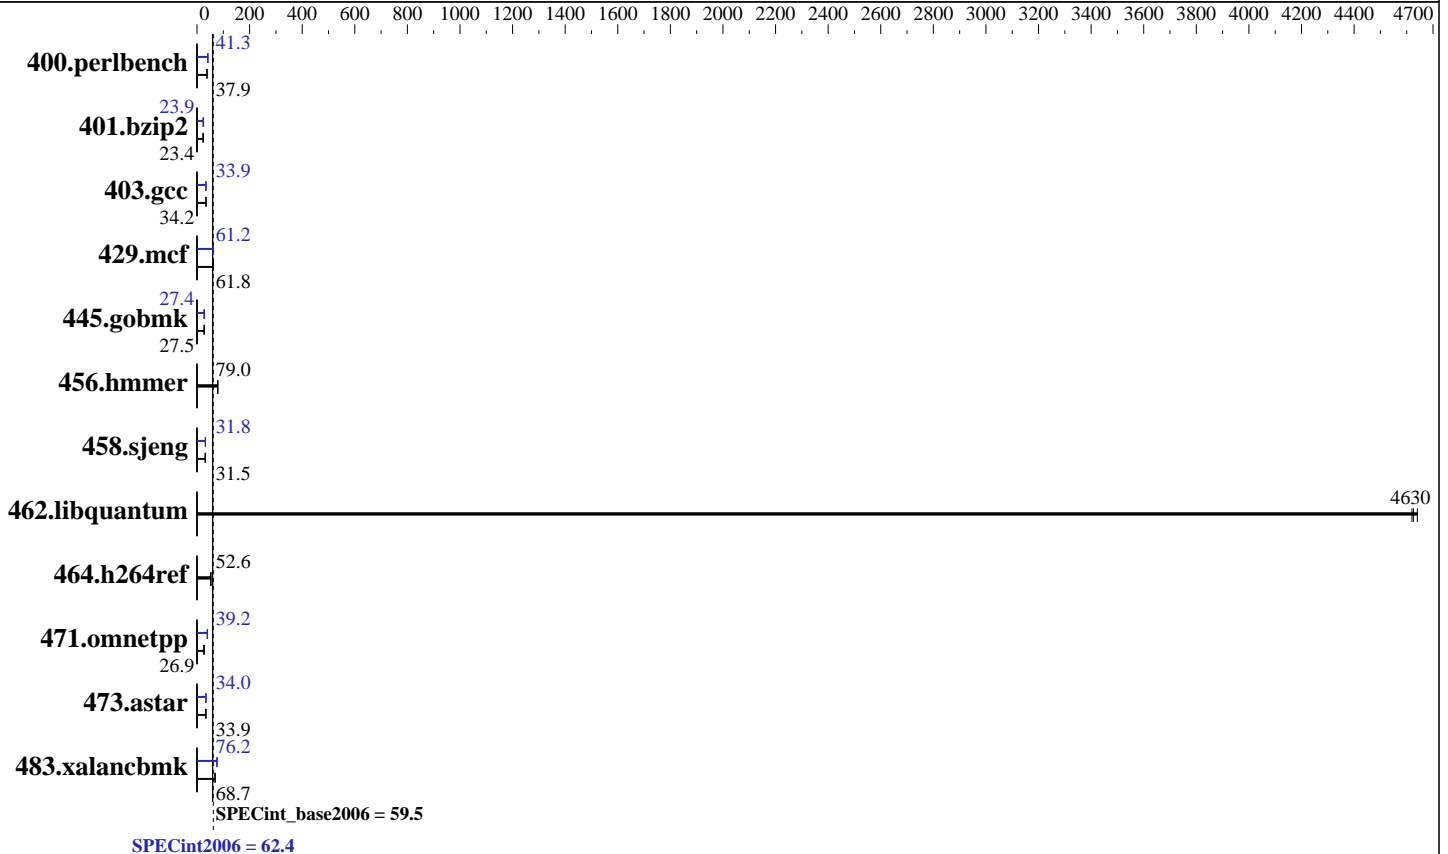

Hardware

CPU Name: Intel Xeon E5-2620 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
 Disk Subsystem: 1 x 800 GB SATA SSD
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD350
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECint2006 = **62.4**

SPECint_base2006 = **59.5**

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	258	37.9	258	37.8	<u>258</u>	<u>37.9</u>	<u>236</u>	<u>41.3</u>	236	41.4	237	41.2
401.bzip2	<u>412</u>	<u>23.4</u>	411	23.5	414	23.3	405	23.8	404	23.9	<u>405</u>	<u>23.9</u>
403.gcc	<u>235</u>	<u>34.2</u>	235	34.2	235	34.2	236	34.1	<u>237</u>	<u>33.9</u>	238	33.9
429.mcf	147	61.8	149	61.0	<u>148</u>	<u>61.8</u>	<u>149</u>	<u>61.2</u>	148	61.8	149	61.1
445.gobmk	382	27.5	381	27.5	<u>382</u>	<u>27.5</u>	383	27.4	383	27.4	<u>383</u>	<u>27.4</u>
456.hammer	<u>118</u>	<u>79.0</u>	118	79.1	118	78.9	<u>118</u>	<u>79.0</u>	118	79.1	118	78.9
458.sjeng	<u>385</u>	<u>31.5</u>	385	31.5	385	31.5	381	31.8	<u>380</u>	<u>31.8</u>	380	31.8
462.libquantum	4.48	4620	4.47	4640	<u>4.48</u>	<u>4630</u>	4.48	4620	4.47	4640	<u>4.48</u>	<u>4630</u>
464.h264ref	<u>420</u>	<u>52.6</u>	420	52.7	421	52.6	<u>420</u>	<u>52.6</u>	420	52.7	421	52.6
471.omnetpp	228	27.5	<u>232</u>	<u>26.9</u>	240	26.0	<u>159</u>	<u>39.2</u>	158	39.5	160	39.1
473.astar	206	34.0	209	33.6	<u>207</u>	<u>33.9</u>	<u>206</u>	<u>34.0</u>	207	34.0	206	34.0
483.xalancbmk	<u>100</u>	<u>68.7</u>	101	68.3	100	68.9	90.5	76.2	90.7	76.1	<u>90.6</u>	<u>76.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled

Cluster On Die set to Disabled

Early Snoop set to Enabled

Performance Profile set to Custom

C1E Support set to Disabled

Core C3 set to Disabled

Core C6 set to Disabled

Thermal Profile set to High Fan Speed

Memory Power Savings set to Disabled

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1

running on RD350-MLK Thu May 5 17:52:30 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 62.4

Lenovo ThinkServer RD350
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECint_base2006 = 59.5

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
  2 "physical id"s (chips)
  16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      264560720 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 1
  # This file is deprecated and will be removed in a future service pack or
  # release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP1"
  VERSION_ID="12.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

```

uname -a:
Linux RD350-MLK 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 5 17:50

```

SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   689G  4.0G  685G   1% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO VB3TS362 03/24/2016

Memory:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 62.4

Lenovo ThinkServer RD350
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECint_base2006 = 59.5

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Platform Notes (Continued)

16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 62.4

Lenovo ThinkServer RD350
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECint_base2006 = 59.5

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
473.astar: icpc -m64
```

Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
403.gcc: -DSPEC_CPU_LP64
```

```
429.mcf: -DSPEC_CPU_LP64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -DSPEC_CPU_LP64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 62.4

Lenovo ThinkServer RD350
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECint_base2006 = 59.5

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD350
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECint2006 = 62.4

SPECint_base2006 = 59.5

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 28 17:33:02 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 June 2016.