



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint®_rate2006 = 1650

SPECint_rate_base2006 = 1570

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

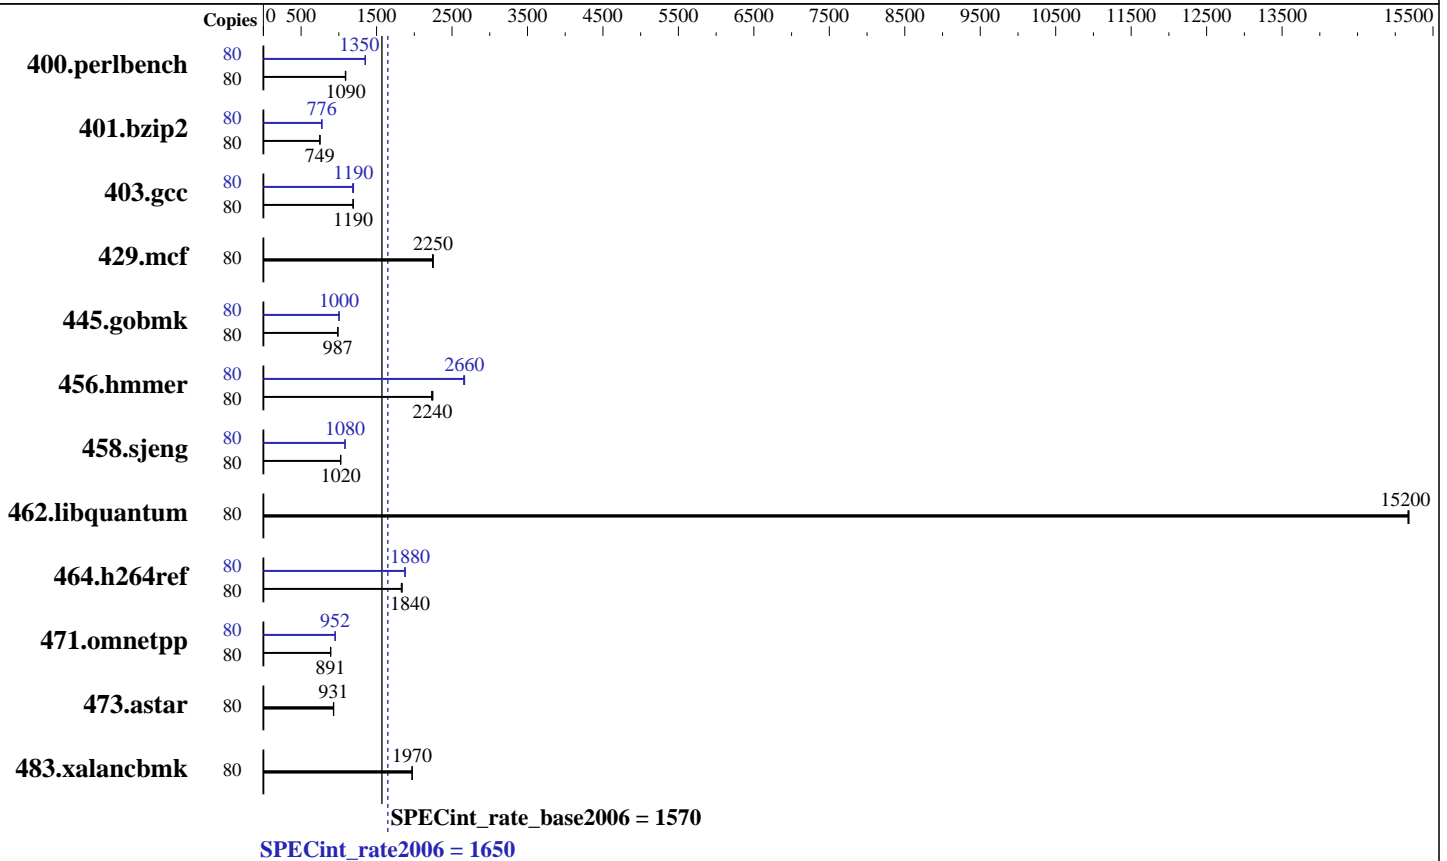

Hardware

CPU Name: Intel Xeon E5-4620 v4
CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
CPU MHz: 2100
FPU: Integrated
CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1, Kernel 3.12.49-11-default
Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint_rate2006 = 1650

SPECint_rate_base2006 = 1570

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|--------------------|--------------------|-------------------|--------------------|-------------------|---------------------|--------|-------------------|--------------------|-------------------|--------------------|-------------------|---------------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 80 | 717 | 1090 | <u>717</u> | <u>1090</u> | 720 | 1090 | 80 | <u>578</u> | <u>1350</u> | 578 | 1350 | 580 | 1350 |
| 401.bzip2 | 80 | <u>1031</u> | <u>749</u> | 1031 | 749 | 1030 | 750 | 80 | 1000 | 772 | 995 | 776 | <u>995</u> | <u>776</u> |
| 403.gcc | 80 | 540 | 1190 | <u>541</u> | <u>1190</u> | 543 | 1190 | 80 | 539 | 1190 | <u>540</u> | <u>1190</u> | 545 | 1180 |
| 429.mcf | 80 | 324 | 2250 | <u>325</u> | <u>2250</u> | 326 | 2240 | 80 | 324 | 2250 | <u>325</u> | <u>2250</u> | 326 | 2240 |
| 445.gobmk | 80 | 850 | 988 | <u>850</u> | <u>987</u> | 851 | 986 | 80 | 836 | 1000 | <u>837</u> | <u>1000</u> | 838 | 1000 |
| 456.hammer | 80 | 335 | 2230 | 332 | 2250 | <u>333</u> | <u>2240</u> | 80 | 280 | 2670 | <u>280</u> | <u>2660</u> | 281 | 2650 |
| 458.sjeng | 80 | <u>945</u> | <u>1020</u> | 945 | 1020 | 945 | 1020 | 80 | <u>894</u> | <u>1080</u> | 894 | 1080 | 895 | 1080 |
| 462.libquantum | 80 | 109 | 15200 | 109 | 15200 | <u>109</u> | <u>15200</u> | 80 | 109 | 15200 | 109 | 15200 | <u>109</u> | <u>15200</u> |
| 464.h264ref | 80 | 963 | 1840 | 969 | 1830 | <u>965</u> | <u>1840</u> | 80 | <u>943</u> | <u>1880</u> | 942 | 1880 | 944 | 1880 |
| 471.omnetpp | 80 | 561 | 892 | <u>561</u> | <u>891</u> | 561 | 891 | 80 | <u>525</u> | <u>952</u> | 526 | 951 | 525 | 952 |
| 473.astar | 80 | <u>603</u> | <u>931</u> | 605 | 928 | 603 | 931 | 80 | <u>603</u> | <u>931</u> | 605 | 928 | 603 | 931 |
| 483.xalancbmk | 80 | 280 | 1970 | <u>280</u> | <u>1970</u> | 280 | 1970 | 80 | 280 | 1970 | <u>280</u> | <u>1970</u> | 280 | 1970 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
HP Power Profile set to Balanced Power and Performance
QPI Snoop Configuration set to Cluster on Die
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on sles12biswadl560 Thu Sep 1 18:02:49 2016
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint_rate2006 = 1650

SPECint_rate_base2006 = 1570

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-4620 v4 @ 2.10GHz

4 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

physical 2: cores 0 1 2 3 4 8 9 10 11 12

physical 3: cores 0 1 2 3 4 8 9 10 11 12

cache size : 12800 KB

From /proc/meminfo

MemTotal: 529306040 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 1

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION_ID="12.1"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux sles12biswadl560 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 1 18:00

SPEC is set to: /home/cpu2006

Filesystem Type Size Used Avail Use% Mounted on
/dev/sda4 xfs 331G 61G 271G 19% /home

Additional information from dmidecode:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9
(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint_rate2006 = 1650

SPECint_rate_base2006 = 1570

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P85 07/01/2016

Memory:

16x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as: 32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 2133 MHz

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalanbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint_rate2006 = 1650

SPECint_rate_base2006 = 1570

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint_rate2006 = 1650

SPECint_rate_base2006 = 1570

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Peak Portability Flags (Continued)

483.xalanbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint_rate2006 = 1650

SPECint_rate_base2006 = 1570

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Oct 4 14:49:40 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 October 2016.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7