



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Yadro

## SPECint®\_rate2006 = Not Run

### Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

## SPECint\_rate\_base2006 = 1360

CPU2006 license: 4813


Test sponsor: Yadro

Tested by: Yadro

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

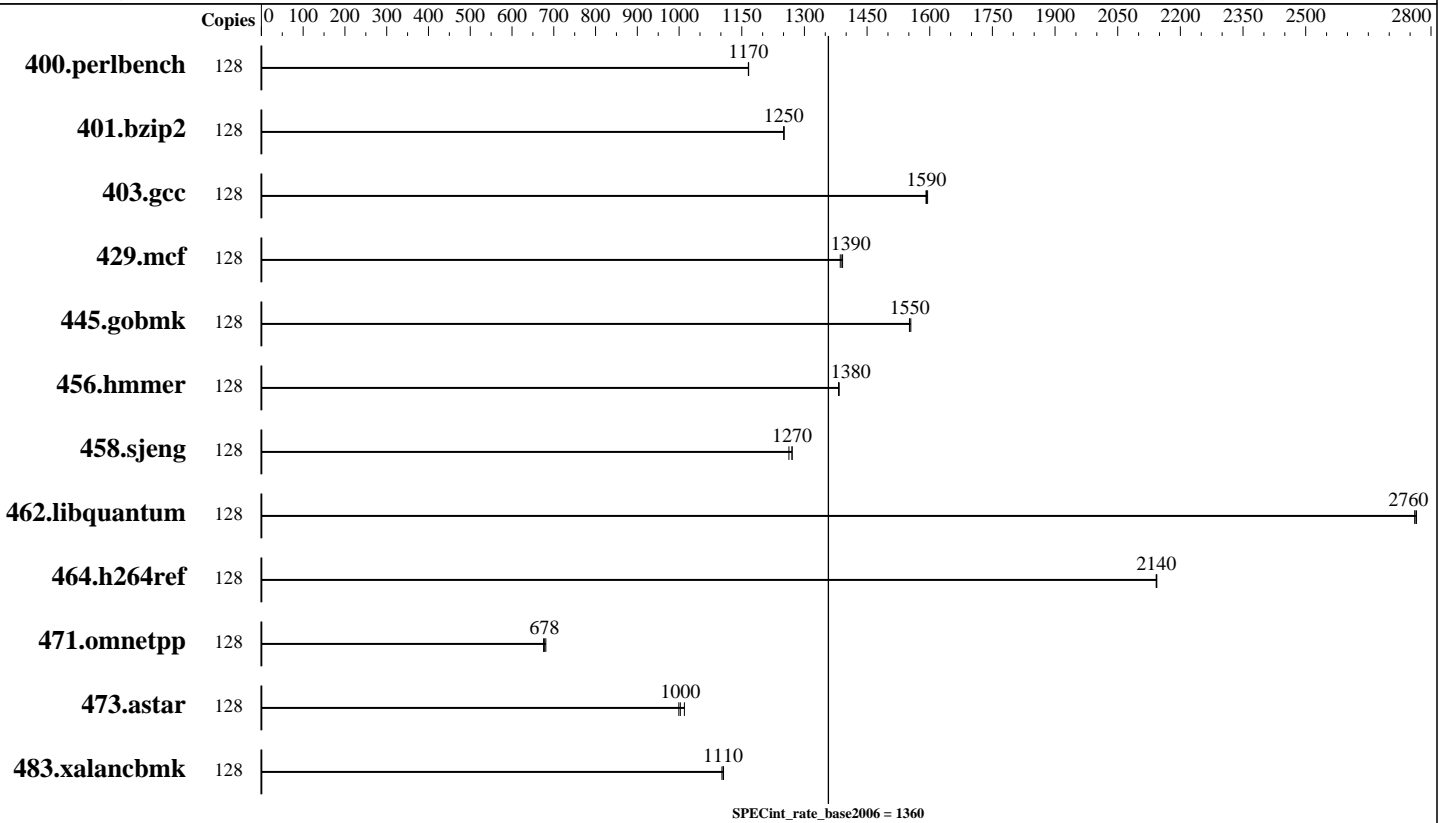

### Hardware

CPU Name: IBM POWER8  
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.86 GHz  
 CPU MHz: 3325  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 4 threads/core  
 CPU(s) orderable: 1-4 chips  
 Primary Cache: 32 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per core  
 Other Cache: 16 MB I+D off chip per 8 DIMMs  
 Memory: 8 TB (128 x 64 GB 4Rx4 PC4 - 2400T, running at 1600)  
 Disk Subsystem: 2 x 2.9 TB NVMe SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.ppc64le  
 Compiler: C/C++: Version 13.1.5 of IBM XL C/C++ for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Yadro

SPECint\_rate2006 = Not Run

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECint\_rate\_base2006 = 1360

CPU2006 license: 4813  
Test sponsor: Yadro  
Tested by: Yadro

Test date: Dec-2017  
Hardware Availability: Dec-2017  
Software Availability: Dec-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	<b><u>1072</u></b>	<b><u>1170</u></b>	1072	1170	1073	1170							
401.bzip2	128	987	1250	<b><u>987</u></b>	<b><u>1250</u></b>	988	1250							
403.gcc	128	646	1590	648	1590	<b><u>647</u></b>	<b><u>1590</u></b>							
429.mcf	128	842	1390	839	1390	<b><u>840</u></b>	<b><u>1390</u></b>							
445.gobmk	128	865	1550	864	1550	<b><u>865</u></b>	<b><u>1550</u></b>							
456.hammer	128	863	1380	864	1380	<b><u>864</u></b>	<b><u>1380</u></b>							
458.sjeng	128	1226	1260	<b><u>1219</u></b>	<b><u>1270</u></b>	1219	1270							
462.libquantum	128	960	2760	959	2770	<b><u>960</u></b>	<b><u>2760</u></b>							
464.h264ref	128	<b><u>1322</u></b>	<b><u>2140</u></b>	1322	2140	1322	2140							
471.omnetpp	128	1184	676	1175	681	<b><u>1180</u></b>	<b><u>678</u></b>							
473.astar	128	887	1010	899	999	<b><u>896</u></b>	<b><u>1000</u></b>							
483.xalancbmk	128	801	1100	<b><u>799</u></b>	<b><u>1110</u></b>	798	1110							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "taskset" command (see flags file for details).

## Operating System Notes

"ulimit -s" used to remove statck size limit.  
"ppc64\_cpu --smt=4" used to set SMT4 mode (see flags file for details).

## Platform Notes

Sysinfo program /home/build/spec2006/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c  
running on localhost.localdomain Fri Dec 15 10:10:50 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
clock : 3857.000000MHz
machine : PowerNV 0000000000000000
model : 0000000000000000
platform : PowerNV
revision : 2.0 (pvr 004d 0200)
cpu : POWER8 (raw), altivec supported
```

\*

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Yadro

SPECint\_rate2006 = Not Run

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECint\_rate\_base2006 = 1360

CPU2006 license: 4813

Test sponsor: Yadro

Tested by: Yadro

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

### Platform Notes (Continued)

\* 0 "physical id" tags found. Perhaps this is an older system,  
 \* or a virtualized system. Not attempting to guess how to  
 \* count chips/cores for this system.  
 \*

128 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The  
 following excerpts from /proc/cpuinfo might not be reliable. Use with  
 caution.)

From /proc/meminfo

```
MemTotal:      8569843072 kB
HugePages_Total:    16000
Hugepagesize:     16384 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-327.el7.ppc64le #1 SMP Thu Oct 29 17:31:13
EDT 2015 ppc64le ppc64le ppc64le GNU/Linux
```

run-level 3 Jan 1 03:13

SPEC is set to: /home/build/spec2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   2.9T  528G  2.4T  19% /home
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

XLFRTEOPTS = "intrinths=1"

Binaries were compiled on a system with 4x POWER8 chips + 4 TB Memory using rhel 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## Yadro

SPECint\_rate2006 = Not Run

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECint\_rate\_base2006 = 1360

CPU2006 license: 4813

Test sponsor: Yadro

Tested by: Yadro

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

### General Notes (Continued)

is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

### Base Compiler Invocation

C benchmarks:

`/opt/ibm/xlC/13.1.5/bin/xlc_r -qlanglvl=extc99`

C++ benchmarks:

`/opt/ibm/xlC/13.1.5/bin/xlC_r`

### Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_LP64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_LP64  
 464.h264ref: -qchars=signed -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_LP64

### Base Optimization Flags

C benchmarks:

`-qipa=threads -q64 -O5 -qalias=noansi -qinline=40 -qsimd=noauto`

C++ benchmarks:

`-qipa=threads -q64 -O5 -qinline=40`



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Yadro

SPECint\_rate2006 = Not Run

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECint\_rate\_base2006 = 1360

CPU2006 license: 4813

Test sponsor: Yadro

Tested by: Yadro

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Dec-2016

## Base Other Flags

C benchmarks:  
-qipa=noobject

C++ benchmarks:  
-qipa=noobject

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/vesnin\\_xl-V1.1.html](http://www.spec.org/cpu2006/flags/vesnin_xl-V1.1.html)

[http://www.spec.org/cpu2006/flags/vesnin\\_platform-V1.1.html](http://www.spec.org/cpu2006/flags/vesnin_platform-V1.1.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/vesnin\\_xl-V1.1.xml](http://www.spec.org/cpu2006/flags/vesnin_xl-V1.1.xml)

[http://www.spec.org/cpu2006/flags/vesnin\\_platform-V1.1.xml](http://www.spec.org/cpu2006/flags/vesnin_platform-V1.1.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Mar 9 10:42:50 2018 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 March 2018.