



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

ASUS RS500-E8-RS4 v2

SPECrate2017_int_base = 65.2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032


Test Sponsor: Format sp. z o.o.

Tested by: Format sp. z o.o.

Test Date: Aug-2018

Hardware Availability: Aug-2018

Software Availability: Apr-2018

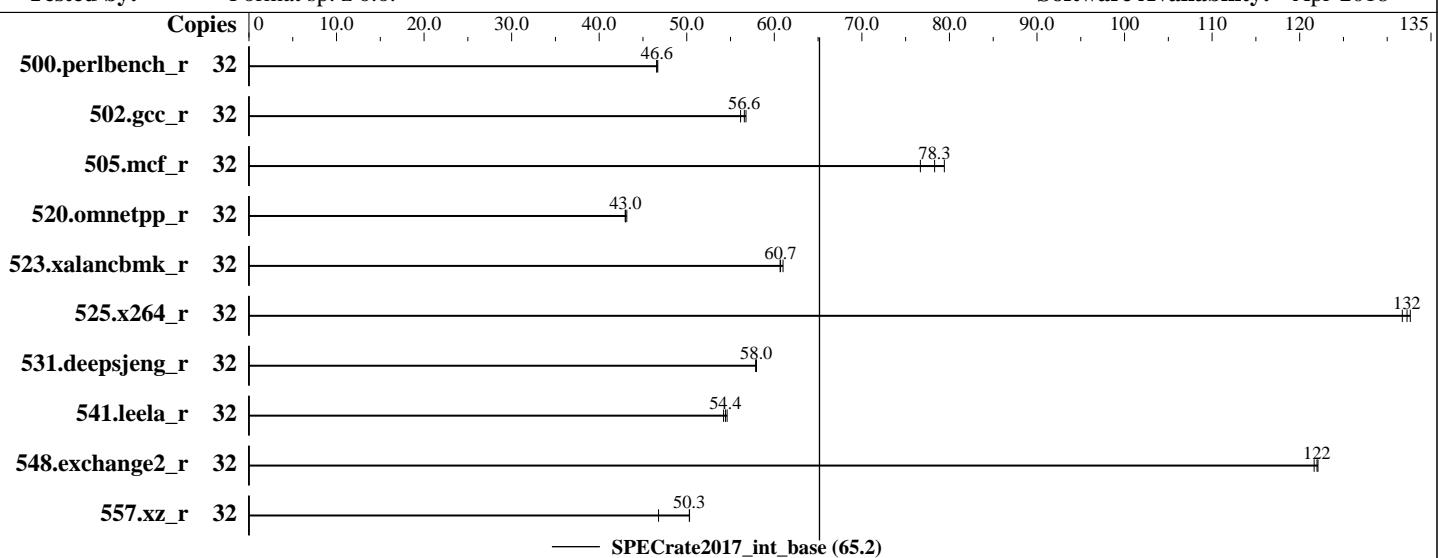

Hardware

CPU Name: Intel Xeon E5-2620 v4
Max MHz.: 3000
Nominal: 2100
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1,2 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 256 KB I+D on chip per core
L3: 20 MB I+D on chip per chip
Other: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R,
running at 2133)
Storage: 1x 800 GB PCIe SSD
Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.5
(Maipo)
Compiler: 3.10.0-862.9.1.el7.x86_64
C/C++: Version 18.0.0.128 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Version 3401 released Jun-2017
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc: jemalloc memory allocator library
V5.0.1;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.2

ASUS RS500-E8-RS4 v2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Date: Aug-2018

Test Sponsor: Format sp. z o.o.

Hardware Availability: Aug-2018

Tested by: Format sp. z o.o.

Software Availability: Apr-2018

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|-------------|-------------|------------|-------------|------------|-------------|--------|---------|-------|---------|-------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 32 | 1093 | 46.6 | 1091 | 46.7 | 1094 | 46.6 | | | | | | | |
| 502.gcc_r | 32 | 798 | 56.8 | 801 | 56.6 | 807 | 56.1 | | | | | | | |
| 505.mcf_r | 32 | 651 | 79.4 | 660 | 78.3 | 674 | 76.7 | | | | | | | |
| 520.omnetpp_r | 32 | 973 | 43.2 | 977 | 43.0 | 976 | 43.0 | | | | | | | |
| 523.xalancbmk_r | 32 | 557 | 60.7 | 557 | 60.7 | 554 | 61.0 | | | | | | | |
| 525.x264_r | 32 | 424 | 132 | 422 | 133 | 425 | 132 | | | | | | | |
| 531.deepsjeng_r | 32 | 633 | 58.0 | 633 | 58.0 | 634 | 57.9 | | | | | | | |
| 541.leela_r | 32 | 974 | 54.4 | 970 | 54.6 | 978 | 54.2 | | | | | | | |
| 548.exchange2_r | 32 | 687 | 122 | 689 | 122 | 687 | 122 | | | | | | | |
| 557.xz_r | 32 | 687 | 50.3 | 687 | 50.3 | 739 | 46.8 | | | | | | | |

SPECrate2017_int_base = 65.2

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2017/lib/ia32:/usr/cpu2017/lib/intel64:/usr/cpu2017/je5.0.1-32:/usr/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5 sources available via jemalloc.net;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.2

ASUS RS500-E8-RS4 v2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Date: Aug-2018

Test Sponsor: Format sp. z o.o.

Hardware Availability: Aug-2018

Tested by: Format sp. z o.o.

Software Availability: Apr-2018

Platform Notes

BIOS Configuration:

Optimized Performance Settings: SPECCPU*_rate_base2006

Power Technology: Custom

Config TDP: Enabled

Config TDP Level: Nominal

Energy Performance BIAS setting.: Balanced Performance

Workload Configuration: I/O Sensitive

Sysinfo program /usr/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Mon Aug 6 13:21:04 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
2 "physical id"s (chips)
32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

| | |
|----------------------|---|
| Architecture: | x86_64 |
| CPU op-mode(s): | 32-bit, 64-bit |
| Byte Order: | Little Endian |
| CPU(s): | 32 |
| On-line CPU(s) list: | 0-31 |
| Thread(s) per core: | 2 |
| Core(s) per socket: | 8 |
| Socket(s): | 2 |
| NUMA node(s): | 2 |
| Vendor ID: | GenuineIntel |
| CPU family: | 6 |
| Model: | 79 |
| Model name: | Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz |
| Stepping: | 1 |
| CPU MHz: | 2095.157 |
| BogoMIPS: | 4190.31 |
| Virtualization: | VT-x |
| L1d cache: | 32K |
| L1i cache: | 32K |
| L2 cache: | 256K |

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.2

ASUS RS500-E8-RS4 v2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Date: Aug-2018

Test Sponsor: Format sp. z o.o.

Hardware Availability: Aug-2018

Tested by: Format sp. z o.o.

Software Availability: Apr-2018

Platform Notes (Continued)

L3 cache: 20480K
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch epb cat_13 cdp_13 intel_ppin intel_pt ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a rdseed adx smap xsaveopt cq_m_llc cq_m_occu_llc cq_m_mb_m_total cq_m_mb_m_local dtherm ida arat pln pts spec_ctrl intel_stibp

/proc/cpuinfo cache data
cache size : 20480 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 130972 MB
node 0 free: 127614 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 131072 MB
node 1 free: 128046 MB
node distances:
node 0 1
0: 10 21
1: 21 10

From /proc/meminfo

MemTotal: 263872152 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.5"
PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.2

ASUS RS500-E8-RS4 v2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Date: Aug-2018

Test Sponsor: Format sp. z o.o.

Hardware Availability: Aug-2018

Tested by: Format sp. z o.o.

Software Availability: Apr-2018

Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

```
uname -a:
```

```
Linux localhost.localdomain 3.10.0-862.9.1.el7.x86_64 #1 SMP Wed Jun 27 04:30:39 EDT
2018 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2): Mitigation: Full retpoline
```

```
run-level 3 Aug 6 13:17
```

```
SPEC is set to: /usr/cpu2017
```

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|-----------------------|------|------|------|-------|------|------------|
| /dev/mapper/rhel-root | xfs | 50G | 27G | 24G | 54% | / |

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 3401 06/22/2017
```

```
Memory:
```

```
16x <BAD INDEX> <BAD INDEX> 16 GB 2 rank 2400, configured at 2133
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.2

ASUS RS500-E8-RS4 v2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Date: Aug-2018

Test Sponsor: Format sp. z o.o.

Hardware Availability: Aug-2018

Tested by: Format sp. z o.o.

Software Availability: Apr-2018

Compiler Version Notes (Continued)

=====

FC 548.exchange2_r(base)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Format sp. z o.o.

SPECrate2017_int_base = 65.2

ASUS RS500-E8-RS4 v2

SPECrate2017_int_peak = Not Run

CPU2017 License: 9032

Test Date: Aug-2018

Test Sponsor: Format sp. z o.o.

Hardware Availability: Aug-2018

Tested by: Format sp. z o.o.

Software Availability: Apr-2018

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/FORMAT-RS500-E8-RS4-v2-Platform-Settings.html>
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/FORMAT-RS500-E8-RS4-v2-Platform-Settings.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-08-06 13:21:04-0400.

Report generated on 2018-10-31 18:47:16 by CPU2017 PDF formatter v6067.

Originally published on 2018-08-22.