



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 2488 V5 (Intel Xeon Gold 6134M)

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: May-2018

Software Availability: Mar-2018

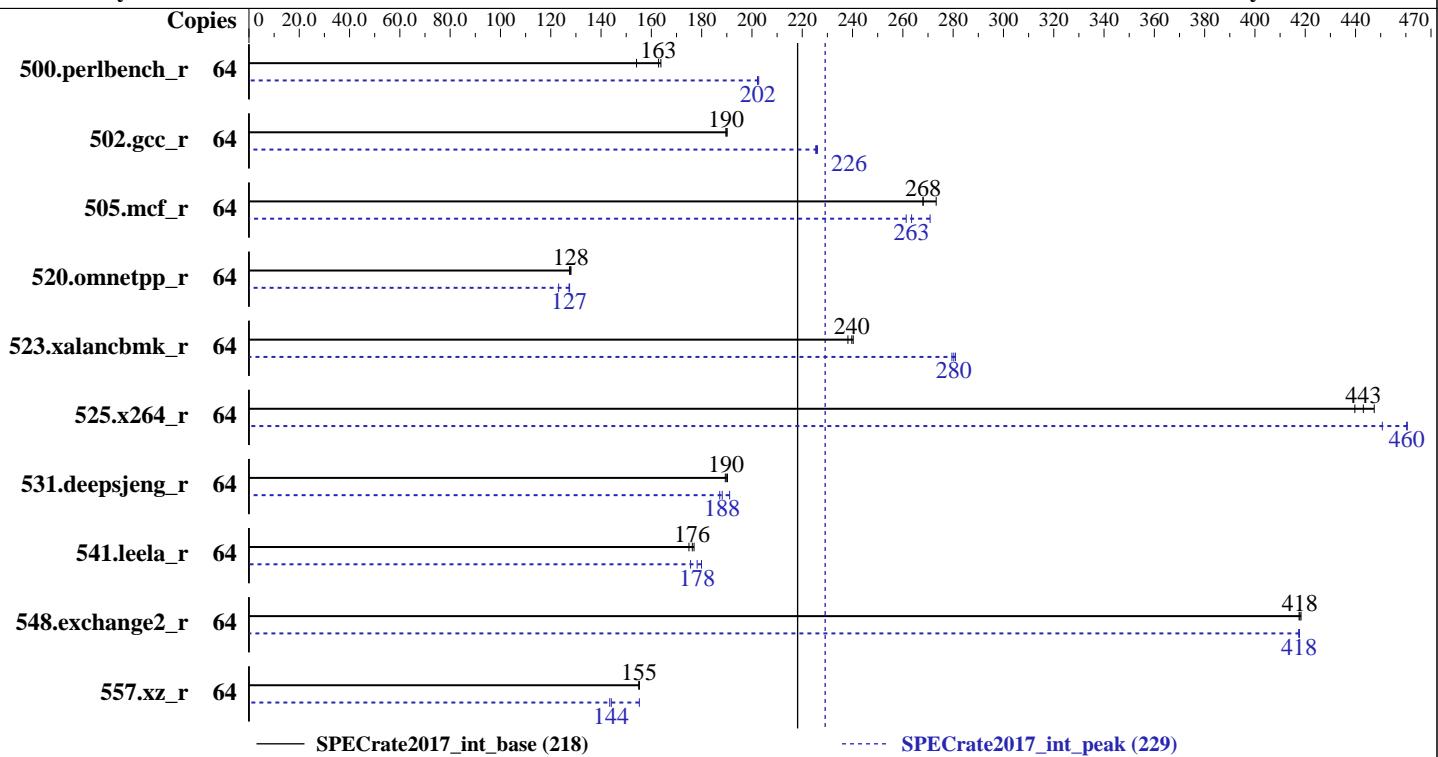

Hardware

CPU Name: Intel Xeon Gold 6134M
 Max MHz.: 3700
 Nominal: 3200
 Enabled: 32 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 900 GB SAS HDD 10K RPM, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.120-92.70-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 0.80 released Feb-2018
 File System: btrfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 218

Huawei 2488 V5 (Intel Xeon Gold 6134M)

SPECrate2017_int_peak = 229

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	661	154	626	163	622	164	64	504	202	503	203	504	202
502.gcc_r	64	478	190	478	190	477	190	64	402	225	401	226	402	226
505.mcf_r	64	378	273	386	268	386	268	64	382	271	396	261	393	263
520.omnetpp_r	64	659	127	656	128	656	128	64	660	127	659	127	682	123
523.xalancbmk_r	64	282	240	281	240	284	238	64	241	281	241	280	242	280
525.x264_r	64	255	440	253	443	250	447	64	249	451	243	460	243	461
531.deepsjeng_r	64	387	189	386	190	385	190	64	384	191	390	188	392	187
541.leela_r	64	606	175	601	176	599	177	64	589	180	604	176	595	178
548.exchange2_r	64	401	418	402	418	401	418	64	401	418	402	417	402	418
557.xz_r	64	446	155	446	155	445	155	64	445	155	480	144	482	143

SPECrate2017_int_base = 218

SPECrate2017_int_peak = 229

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 218

Huawei 2488 V5 (Intel Xeon Gold 6134M)

SPECrate2017_int_peak = 229

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

General Notes (Continued)

and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>;

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Sub NUMA Cluster (SNC) set to enabled

IMC (Integrated memory controller) Interleaving set to 1 way interleave

Xtended Prediction Table (XPT) Prefetch set to Enable

Memory Patrol Scrub set to Disable

Last Level Cache (LLC) Prefetch set to Disable

Sysinfo program /home/speccpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on guyuxin Mon Aug 6 19:53:38 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6134M CPU @ 3.20GHz

4 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 2 3 9 16 19 26 27

physical 1: cores 0 2 3 9 16 19 26 27

physical 2: cores 0 2 3 9 16 19 26 27

physical 3: cores 0 2 3 9 16 19 26 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 2

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECCrate2017_int_base = 218

Huawei 2488 V5 (Intel Xeon Gold 6134M)

SPECCrate2017_int_peak = 229

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Platform Notes (Continued)

Core(s) per socket: 8
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6134M CPU @ 3.20GHz
Stepping: 4
CPU MHz: 1200.000
CPU max MHz: 3201.0000
CPU min MHz: 1200.0000
BogoMIPS: 6400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0,1,3,4,32,33,35,36
NUMA node1 CPU(s): 2,5-7,34,37-39
NUMA node2 CPU(s): 8,9,11,12,40,41,43,44
NUMA node3 CPU(s): 10,13-15,42,45-47
NUMA node4 CPU(s): 16,17,19,20,48,49,51,52
NUMA node5 CPU(s): 18,21-23,50,53-55
NUMA node6 CPU(s): 24,25,27,28,56,57,59,60
NUMA node7 CPU(s): 26,29-31,58,61-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm intel_pt rsb_ctxtsw spec_ctrl stibp retrpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

/proc/cpuinfo cache data
cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0 1 3 4 32 33 35 36
node 0 size: 94798 MB
node 0 free: 94524 MB
node 1 cpus: 2 5 6 7 34 37 38 39
node 1 size: 96756 MB

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECCrate2017_int_base = 218

Huawei 2488 V5 (Intel Xeon Gold 6134M)

SPECCrate2017_int_peak = 229

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Platform Notes (Continued)

```
node 1 free: 96497 MB
node 2 cpus: 8 9 11 12 40 41 43 44
node 2 size: 96756 MB
node 2 free: 96516 MB
node 3 cpus: 10 13 14 15 42 45 46 47
node 3 size: 96756 MB
node 3 free: 96562 MB
node 4 cpus: 16 17 19 20 48 49 51 52
node 4 size: 96756 MB
node 4 free: 96588 MB
node 5 cpus: 18 21 22 23 50 53 54 55
node 5 size: 96756 MB
node 5 free: 96585 MB
node 6 cpus: 24 25 27 28 56 57 59 60
node 6 size: 96756 MB
node 6 free: 96583 MB
node 7 cpus: 26 29 30 31 58 61 62 63
node 7 size: 96598 MB
node 7 free: 96290 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  20  20  20  20  20  20  20
  1: 20  10  20  20  20  20  20  20
  2: 20  20  10  20  20  20  20  20
  3: 20  20  20  10  20  20  20  20
  4: 20  20  20  20  10  20  20  20
  5: 20  20  20  20  20  10  20  20
  6: 20  20  20  20  20  20  10  20
  7: 20  20  20  20  20  20  20  10
```

From /proc/meminfo

```
MemTotal:      790460632 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 218

Huawei 2488 V5 (Intel Xeon Gold 6134M)

SPECrate2017_int_peak = 229

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Platform Notes (Continued)

```
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux guyuxin 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 5 Aug 6 19:41

SPEC is set to: /home/speccpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	btrfs	697G	135G	562G	20%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.80 02/24/2018

Memory:

```
24x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
    525.x264_r(base, peak) 557.xz_r(base, peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 218

Huawei 2488 V5 (Intel Xeon Gold 6134M)

SPECrate2017_int_peak = 229

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Compiler Version Notes (Continued)

CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei Huawei 2488 V5 (Intel Xeon Gold 6134M)	SPECrate2017_int_base = 218 SPECrate2017_int_peak = 229
CPU2017 License: 3175 Test Sponsor: Huawei Tested by: Huawei	Test Date: May-2018 Hardware Availability: May-2018 Software Availability: Mar-2018

Base Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks;

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/ie5.0.1-64/lib -ljemalloc
```

C++ benchmarks

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/ie5.0.1-64/lib -liemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/ie5.0.1-64/lib -lijemalloc
```

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

=m64

Fortran benchmarks:

Portra

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks

jcpc

Fortran benchmarks:

Fortran



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 218

Huawei 2488 V5 (Intel Xeon Gold 6134M)

SPECrate2017_int_peak = 229

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 218

Huawei 2488 V5 (Intel Xeon Gold 6134M)

SPECrate2017_int_peak = 229

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):

-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-fopt-mem-layout-trans=3 -fno-standard-realloc-lhs -falign array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-08-06 07:53:37-0400.

Report generated on 2018-10-31 18:19:29 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-04.