



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358


Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

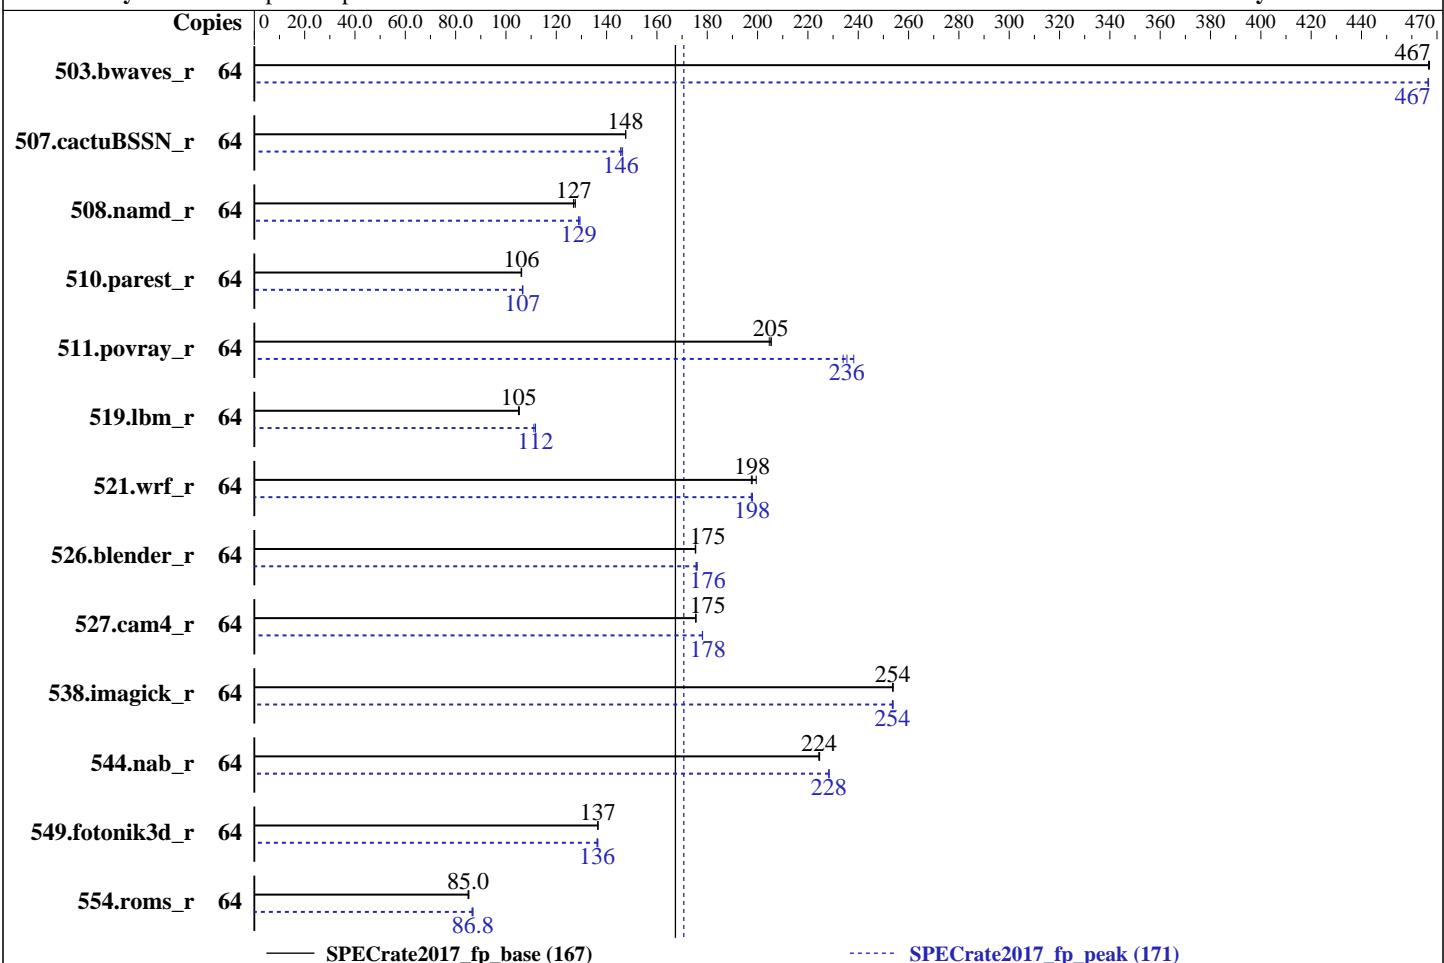

— SPECrate2017_fp_base (167)

····· SPECrate2017_fp_peak (171)

Hardware

CPU Name: Intel Xeon Gold 6130
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
 4.4.120-92.70-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 4.0.8 released Oct-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358

Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<u>1375</u>	<u>467</u>	1374	467	1375	467	64	1376	466	1375	467	<u>1376</u>	<u>467</u>
507.cactusBSSN_r	64	<u>549</u>	<u>148</u>	549	148	549	148	64	556	146	<u>556</u>	<u>146</u>	554	146
508.namd_r	64	479	127	<u>479</u>	<u>127</u>	477	128	64	<u>472</u>	<u>129</u>	472	129	470	129
510.parest_r	64	1576	106	1579	106	<u>1577</u>	<u>106</u>	64	<u>1571</u>	<u>107</u>	1569	107	1572	107
511.povray_r	64	727	205	<u>728</u>	<u>205</u>	730	205	64	639	234	<u>635</u>	<u>236</u>	627	238
519.lbm_r	64	<u>641</u>	<u>105</u>	641	105	642	105	64	<u>604</u>	<u>112</u>	604	112	607	111
521.wrf_r	64	719	199	<u>725</u>	<u>198</u>	726	198	64	726	198	<u>725</u>	<u>198</u>	724	198
526.blender_r	64	<u>556</u>	<u>175</u>	556	175	556	175	64	554	176	555	176	<u>555</u>	<u>176</u>
527.cam4_r	64	638	175	<u>638</u>	<u>175</u>	638	175	64	<u>628</u>	<u>178</u>	628	178	629	178
538.imagick_r	64	627	254	628	254	<u>627</u>	<u>254</u>	64	627	254	628	254	<u>628</u>	<u>254</u>
544.nab_r	64	480	224	<u>480</u>	<u>224</u>	479	225	64	472	228	<u>472</u>	<u>228</u>	472	228
549.fotonik3d_r	64	1827	136	1826	137	<u>1827</u>	<u>137</u>	64	1827	137	1830	136	<u>1830</u>	<u>136</u>
554.roms_r	64	1197	85.0	<u>1196</u>	<u>85.0</u>	1193	85.3	64	1175	86.5	1171	86.8	<u>1171</u>	<u>86.8</u>

SPECrate2017_fp_base = 167

SPECrate2017_fp_peak = 171

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/CPU2017/lib/ia32:/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-32:/home/CPU2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358

Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS and OS configuration:

SCALING_GOVERNOR set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

IMC (Integrated memory controller) Interleaving set to 1-way

Sub NUMA Cluster (SNC) set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-q537 Sat Jul 6 05:54:47 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz

2 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 2

Core(s) per socket: 16

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358

Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

Platform Notes (Continued)

Model name:	Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
Stepping:	4
CPU MHz:	2800.044
CPU max MHz:	3700.0000
CPU min MHz:	1000.0000
BogoMIPS:	4190.13
Virtualization:	VT-x
L1d cache:	32K
L1i cache:	32K
L2 cache:	1024K
L3 cache:	22528K
NUMA node0 CPU(s):	0-3,8-11,32-35,40-43
NUMA node1 CPU(s):	4-7,12-15,36-39,44-47
NUMA node2 CPU(s):	16-19,24-27,48-51,56-59
NUMA node3 CPU(s):	20-23,28-31,52-55,60-63
Flags:	fpu vme de pse tsc msr pae mce sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperfeagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occup_llc

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 8 9 10 11 32 33 34 35 40 41 42 43
node 0 size: 192036 MB
node 0 free: 183000 MB
node 1 cpus: 4 5 6 7 12 13 14 15 36 37 38 39 44 45 46 47
node 1 size: 193528 MB
node 1 free: 186230 MB
node 2 cpus: 16 17 18 19 24 25 26 27 48 49 50 51 56 57 58 59
node 2 size: 193528 MB
node 2 free: 186176 MB
node 3 cpus: 20 21 22 23 28 29 30 31 52 53 54 55 60 61 62 63
node 3 size: 193391 MB
node 3 free: 186093 MB
node distances:
node    0    1    2    3
      0: 10 11 21 21
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358

Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

Platform Notes (Continued)

```
1: 11 10 21 21  
2: 21 21 10 11  
3: 21 21 11 10
```

From /proc/meminfo

```
MemTotal: 791024968 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d  
SUSE Linux Enterprise Server 12 SP2
```

From /etc/*release* /etc/*version*

```
SuSE-release:  
  SUSE Linux Enterprise Server 12 (x86_64)  
  VERSION = 12  
  PATCHLEVEL = 2  
  # This file is deprecated and will be removed in a future service pack or release.  
  # Please check /etc/os-release for details about this release.  
os-release:  
  NAME="SLES"  
  VERSION="12-SP2"  
  VERSION_ID="12.2"  
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"  
  ID="sles"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-q537 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI  
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

run-level 3 Jul 5 11:42 last=5

```
SPEC is set to: /home/CPU2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sdb3        xfs   407G   67G  341G  17% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358

Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Inspur 4.0.8 10/17/2018

Memory:

24x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

=====

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CC 519.lbm_r(peak) 544.nab_r(peak)

=====

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 508.namd_r(base) 510.parest_r(base)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 508.namd_r(peak) 510.parest_r(peak)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CC 511.povray_r(base) 526.blender_r(base)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358

Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

Compiler Version Notes (Continued)

=====

CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms_r(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280M5 (Intel Xeon Gold 6130)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate2017_fp_base = 167

SPECrate2017_fp_peak = 171

Test Date: Jul-2019

Hardware Availability: Oct-2017

Software Availability: Mar-2018

Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CC 521.wrf_r(peak) 527.cam4_r(peak)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358

Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

Base Portability Flags (Continued)

```
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358

Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

Base Other Flags (Continued)

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358

Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 167

Inspur NF5280M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 171

CPU2017 License: 3358

Test Date: Jul-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Oct-2017

Tested by: Inspur Corporation

Software Availability: Mar-2018

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.3-SKL.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.3-SKL.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-07-06 05:54:46-0400.

Report generated on 2019-07-23 15:04:34 by CPU2017 PDF formatter v6067.

Originally published on 2019-07-23.