SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DIT400TR-48RL
(2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed®2017_fp_base = 150

SPECspeed®2017_fp_peak = 154

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Netweb

Test Date: Feb-2020
Hardware Availability: Sep-2019
Software Availability: Aug-2019

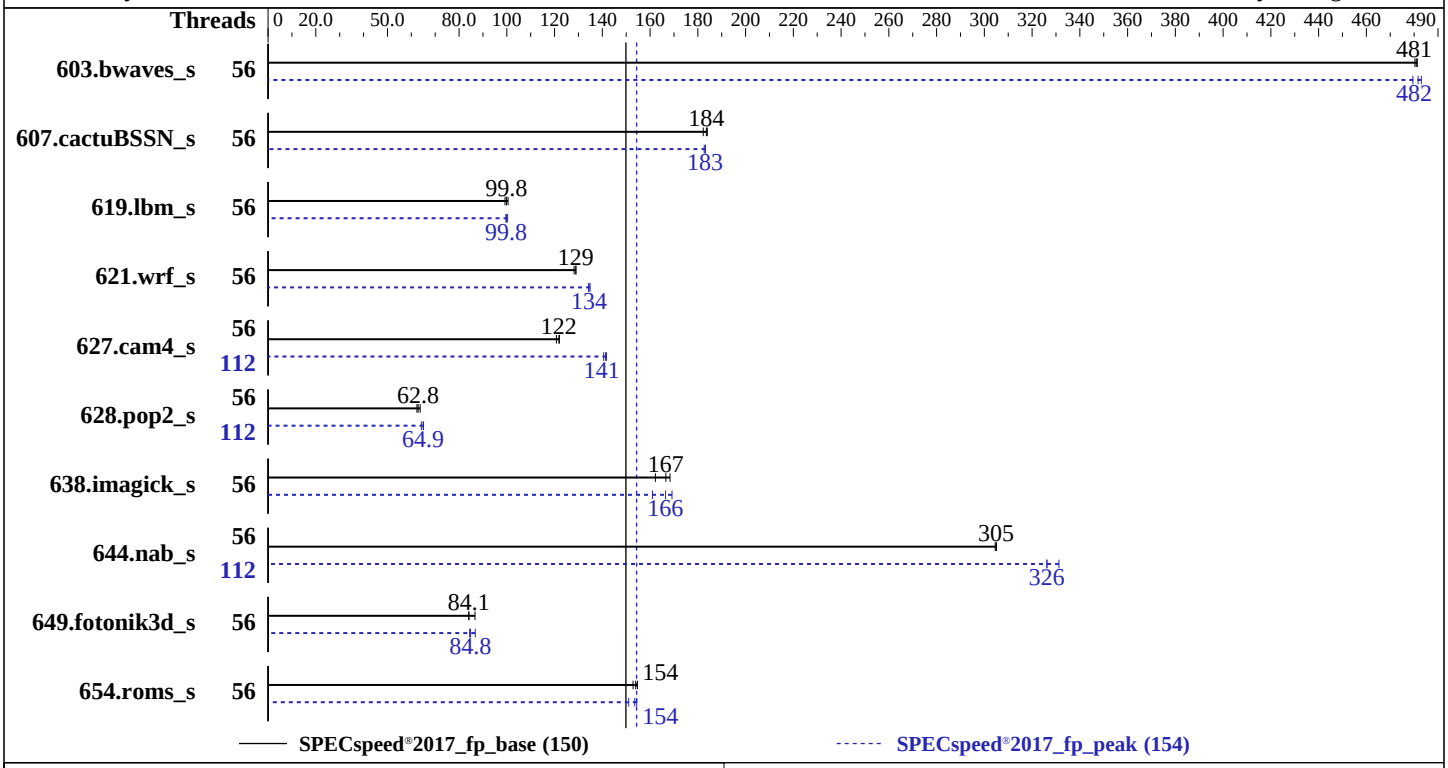

Hardware

CPU Name:	Intel Xeon Platinum 8280L
Max MHz:	4000
Nominal:	2700
Enabled:	56 cores, 2 chips, 2 threads/core
Orderable:	1, 2 (chip)s
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 480 GB SSD
Other:	None

Software

OS:	CentOS Linux release 7.7.1908 (Core) 3.10.0-1062.el7.x86_64
Compiler:	C/C++: Version 19.0.4.243 of Intel C/C++ Compiler Build 20190416 for Linux; Fortran: Version 19.0.4.243 of Intel Fortran Compiler Build 20190416 for Linux
Parallel:	Yes
Firmware:	Version V8.101 released Aug-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	Default

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	**123**	**481**	123	481	123	480	56	123	479	122	483	**122**	**482**
607.cactuBSSN_s	56	90.6	184	91.5	182	**90.8**	**184**	56	91.3	183	**91.0**	**183**	91.0	183
619.lbm_s	56	52.8	99.2	**52.5**	**99.8**	52.1	101	56	52.2	100	**52.5**	**99.8**	52.6	99.6
621.wrf_s	56	103	129	**103**	**129**	103	128	56	98.1	135	**98.4**	**134**	98.5	134
627.cam4_s	56	**72.8**	**122**	73.4	121	72.6	122	112	63.1	141	**62.7**	**141**	62.5	142
628.pop2_s	56	**189**	**62.8**	190	62.4	186	63.7	112	185	64.2	182	65.1	**183**	**64.9**
638.imagick_s	56	85.7	168	**86.6**	**167**	88.9	162	56	85.3	169	89.6	161	**86.7**	**166**
644.nab_s	56	57.3	305	**57.3**	**305**	57.4	305	112	**53.6**	**326**	52.7	331	53.6	326
649.fotonik3d_s	56	**108**	**84.1**	108	84.1	105	86.7	56	105	86.8	108	84.4	**108**	**84.8**
654.roms_s	56	102	155	103	153	**102**	**154**	56	102	154	**103**	**154**	104	151

SPECspeed®2017_fp_base = 150

SPECspeed®2017_fp_peak = 154

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has learned that this result, which used an evaluation compiler, was submitted
contrary to the compiler license terms.
Intel has granted a one-time waiver for this result.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
The system was tested with a pre-production version of the Intel Xeon Platinum 8280L, which
had a nominal MHz of 2.6 GHz. Production chips have a nominal MHz of 2.7 GHz and therefore
performance may be slightly faster than what was tested.

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on NODE4 Thu Feb  6 03:57:42 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8280L CPU @ 2.60GHz
       2  "physical id"s (chips)
       112 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 28
       siblings  : 56
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                112
      On-line CPU(s) list:   0-111
      Thread(s) per core:    2
      Core(s) per socket:    28
      Socket(s):             2
      NUMA node(s):          2
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8280L CPU @ 2.60GHz
```

(Continued on next page)

Platform Notes (Continued)

```
      Stepping:              5
      CPU MHz:               1000.231
      CPU max MHz:           3900.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              5200.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              39424K
      NUMA node0 CPU(s):     0-27,56-83
      NUMA node1 CPU(s):     28-55,84-111
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
      intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
      rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
      hwp_act_window hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp flush_l1d
      arch_capabilities

  /proc/cpuinfo cache data
     cache size : 39424 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
    56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
    node 0 size: 195228 MB
    node 0 free: 154028 MB
    node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
    53 54 55 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106
    107 108 109 110 111
    node 1 size: 196608 MB
    node 1 free: 153753 MB
    node distances:
    node   0   1
      0:  10  21
      1:  21  10

  From /proc/meminfo
     MemTotal:       394852372 kB
```

(Continued on next page)

Platform Notes (Continued)

```
    HugePages_Total:       0
    Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
    centos-release: CentOS Linux release 7.7.1908 (Core)
    centos-release-upstream: Derived from Red Hat Enterprise Linux 7.7 (Source)
    os-release:
       NAME="CentOS Linux"
       VERSION="7 (Core)"
       ID="centos"
       ID_LIKE="rhel fedora"
       VERSION_ID="7"
       PRETTY_NAME="CentOS Linux 7 (Core)"
       ANSI_COLOR="0;31"
       CPE_NAME="cpe:/o:centos:centos:7"
    redhat-release: CentOS Linux release 7.7.1908 (Core)
    system-release: CentOS Linux release 7.7.1908 (Core)
    system-release-cpe: cpe:/o:centos:centos:7

  uname -a:
    Linux NODE4 3.10.0-1062.el7.x86_64 #1 SMP Wed Aug 7 18:08:02 UTC 2019 x86_64 x86_64
    x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-3620 (L1 Terminal Fault):        Not affected
  Microarchitectural Data Sampling:         Vulnerable: Clear CPU buffers attempted, no
                                            microcode; SMT vulnerable
  CVE-2017-5754 (Meltdown):                 Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                            via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):        Mitigation: Load fences, __user pointer
                                            sanitization
  CVE-2017-5715 (Spectre variant 2):        Mitigation: Full retpoline, IBPB

  run-level 3 Feb 4 06:00

  SPEC is set to: /home/cpu2017
    Filesystem             Type  Size  Used Avail Use% Mounted on
    /dev/mapper/centos-home xfs   392G  221G  171G  57% /home

  From /sys/devices/virtual/dmi/id
      BIOS:    American Megatrends Inc. V8.101 08/02/2019
      Vendor:  Tyrone Systems
      Product: TP12XH-L2I
      Serial:  empty
```

(Continued on next page)

Platform Notes (Continued)

```
 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`
607.cactuBSSN_s: `-DSPEC_LP64`
619.lbm_s: `-DSPEC_LP64`
621.wrf_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
627.cam4_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
628.pop2_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl`
638.imagick_s: `-DSPEC_LP64`
644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:
```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:
```
icc -m64 -std=c11
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:
```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

```
Same as Base Portability Flags
```

Peak Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:

603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4
-qopenmp -nostandard-realloc-lhs

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-qopenmp -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs

627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/TyroneIT-Platform-Settings-V1-CLX-revA.html
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-15.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/TyroneIT-Platform-Settings-V1-CLX-revA.xml
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-15.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-06 03:57:41-0500.
Report generated on 2020-10-29 21:04:54 by CPU2017 PS formatter v6255.
Originally published on 2020-04-17.