



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 5218R)

SPECrate®2017\_int\_base = 213

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2020

Hardware Availability: Mar-2020

Software Availability: Sep-2019

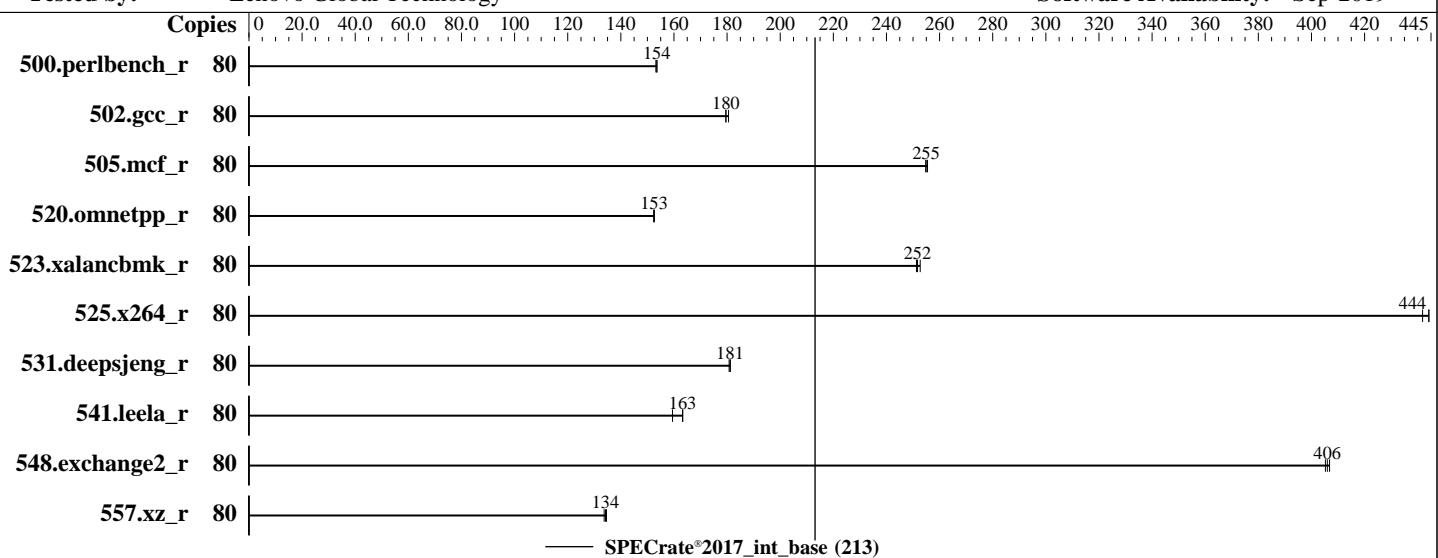

### Hardware

CPU Name: Intel Xeon Gold 5218R  
Max MHz: 4000  
Nominal: 2100  
Enabled: 40 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 27.5 MB I+D on chip per chip  
Other: None  
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R, running at 2666)  
Storage: 1 x 480 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64)  
Compiler: Kernel 4.12.14-195-default  
C/C++: Version 19.0.5.281 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 19.0.5.281 of Intel Fortran  
Compiler for Linux  
Parallel: No  
Firmware: Lenovo BIOS Version oOe152L 2.51 released Feb-2020 tested as OOE151L 2.51 Jan-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 5218R)

**SPECrate®2017\_int\_base = 213**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	831	153	829	154	<b>829</b>	<b>154</b>									
502.gcc_r	80	631	180	627	181	<b>631</b>	<b>180</b>									
505.mcf_r	80	506	255	507	255	<b>507</b>	<b>255</b>									
520.omnetpp_r	80	<b>688</b>	<b>153</b>	689	152	688	153									
523.xalancbmk_r	80	334	253	336	251	<b>336</b>	<b>252</b>									
525.x264_r	80	<b>315</b>	<b>444</b>	315	444	317	442									
531.deepsjeng_r	80	507	181	506	181	<b>506</b>	<b>181</b>									
541.leela_r	80	831	159	811	163	<b>811</b>	<b>163</b>									
548.exchange2_r	80	515	407	517	405	<b>516</b>	<b>406</b>									
557.xz_r	80	642	135	<b>644</b>	<b>134</b>	646	134									

**SPECrate®2017\_int\_base = 213**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.0-ic19.0u5/lib/intel64:/home/cpu2017-1.1.0-ic19.0u5/1
ib/ia32:/home/cpu2017-1.1.0-ic19.0u5/je5.0.1-32"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 5218R)

SPECrate®2017\_int\_base = 213

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

### General Notes (Continued)

numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
Patrol Scrub set to Disable  
SNC set to Enable

Sysinfo program /home/cpu2017-1.1.0-ic19.0u5/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on linux-9n08 Mon Mar 23 11:22:45 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz  
2 "physical id"s (chips)  
80 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 20  
siblings : 40  
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 46 bits physical, 48 bits virtual  
CPU(s): 80  
On-line CPU(s) list: 0-79  
Thread(s) per core: 2

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 5218R)

SPECrate®2017\_int\_base = 213

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Platform Notes (Continued)

Core(s) per socket: 20  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz  
Stepping: 7  
CPU MHz: 2100.000  
CPU max MHz: 4000.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 28160K  
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56  
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59  
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76  
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nop1 xtTopology nonstop\_tsc cpuid aperfmpf perf\_pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrandlahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pku ospke avx512\_vnni md\_clear flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 28160 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56  
node 0 size: 47970 MB  
node 0 free: 47619 MB  
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59  
node 1 size: 48380 MB  
node 1 free: 47883 MB  
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76  
node 2 size: 48380 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 5218R)

SPECrate®2017\_int\_base = 213

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Platform Notes (Continued)

```
node 2 free: 48177 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 48378 MB
node 3 free: 48171 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:      197743628 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:
Linux linux-9n08 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:            Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):          Mitigation: Enhanced IBRS, IBPB: conditional,
                                                RSB filling

run-level 3 Mar 23 11:21

SPEC is set to: /home/cpu2017-1.1.0-ic19.0u5
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   445G   32G  413G   8%  /
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 5218R)

SPECrate®2017\_int\_base = 213

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

```
BIOS:    Lenovo -[00E151L-2.51]- 01/14/2020
Vendor:  Lenovo
Product: System X -[7X09TOZ000]-
Product Family: ThinkSystem
Serial:  1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
12x SK Hynix HMA82GR7CJR8N-WM 16 GB 2 rank 2933
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
=====
```

```
-----
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      | 541.leela_r(base)
=====
```

```
-----
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 548.exchange2_r(base)
=====
```

```
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 5218R)

SPECrate®2017\_int\_base = 213

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2020

Hardware Availability: Mar-2020

Software Availability: Sep-2019

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -festo  
-mfpmath=sse -funroll-loops -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -festo -mfpmath=sse  
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.10 GHz, Intel Xeon Gold 5218R)

SPECrate®2017\_int\_base = 213

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.html](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-22 23:22:44-0400.

Report generated on 2020-04-14 14:15:44 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.