



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(4.00 GHz, Intel Xeon E-2286G)

SPECspeed®2017_fp_base = 33.2

SPECspeed®2017_fp_peak = 33.7

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2020

Hardware Availability: Mar-2020

Software Availability: Sep-2019

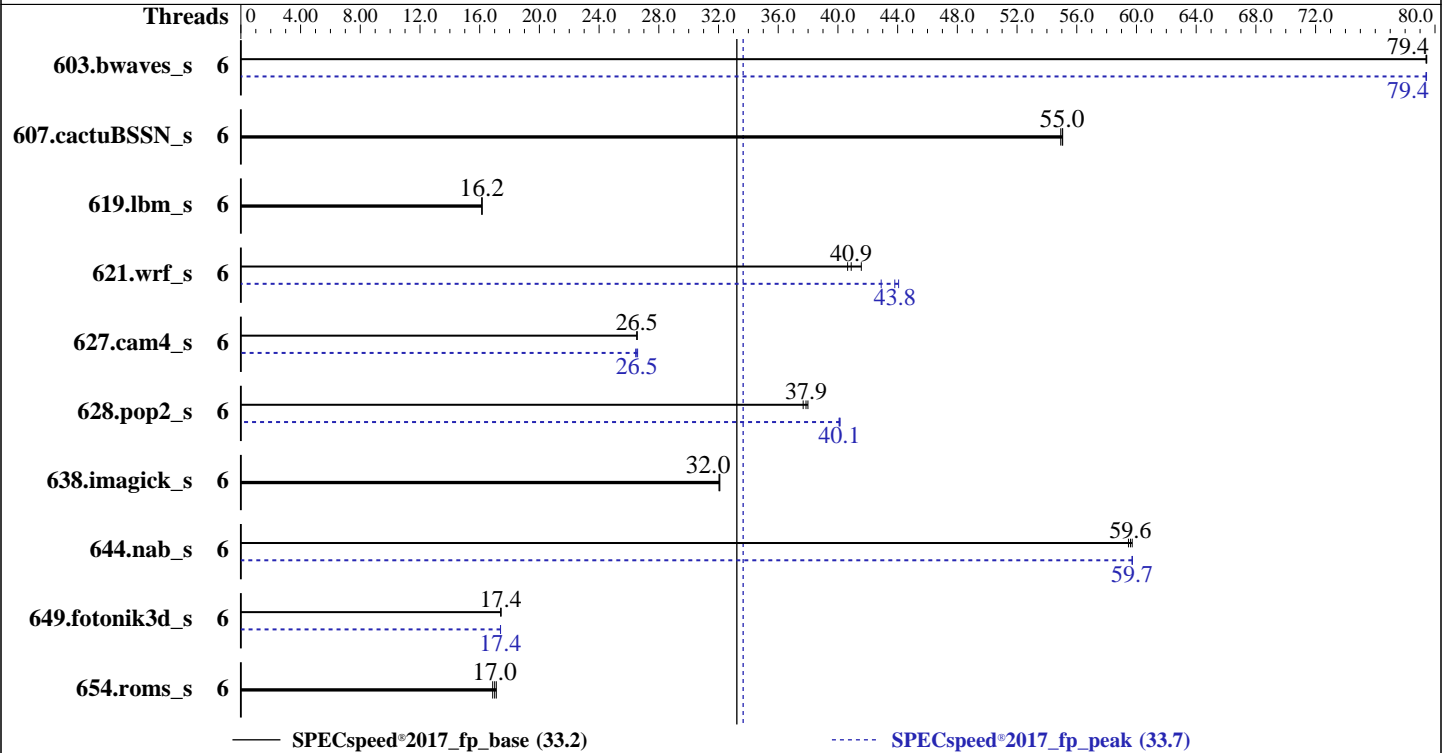

Hardware

CPU Name: Intel Xeon E-2286G
 Max MHz: 4900
 Nominal: 4000
 Enabled: 6 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 12 MB I+D on chip per chip
 Other: None
 Memory: 128 GB (4 x 32 GB 2Rx4 PC4-2666V-E)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86_64)
 Kernel 4.12.14-195-default
 Compiler: C/C++: Version 19.0.5.281 of Intel
 C/C++ Compiler for Linux;
 Fortran: Version 19.0.5.281 of Intel Fortran
 Compiler for Linux
 Parallel: Yes
 Firmware: Lenovo BIOS Version ISE115D 2.10 released Apr-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECSpeed®2017_fp_base = 33.2

ThinkSystem SR250
(4.00 GHz, Intel Xeon E-2286G)

SPECSpeed®2017_fp_peak = 33.7

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2020
Hardware Availability: Mar-2020
Software Availability: Sep-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	6	743	79.4	743	79.4	743	79.4	6	743	79.4	743	79.4	743	79.4
607.cactuBSSN_s	6	303	55.0	303	55.1	303	54.9	6	303	55.0	303	55.1	303	54.9
619.lbm_s	6	324	16.1	324	16.2	324	16.2	6	324	16.1	324	16.2	324	16.2
621.wrf_s	6	318	41.6	323	40.9	325	40.6	6	300	44.1	302	43.8	308	42.9
627.cam4_s	6	334	26.5	334	26.5	334	26.5	6	333	26.6	334	26.5	335	26.4
628.pop2_s	6	314	37.9	315	37.7	313	38.0	6	296	40.1	296	40.1	296	40.1
638.imagick_s	6	450	32.0	450	32.0	450	32.1	6	450	32.0	450	32.0	450	32.1
644.nab_s	6	293	59.7	294	59.5	293	59.6	6	293	59.7	293	59.7	293	59.7
649.fotonik3d_s	6	523	17.4	523	17.4	523	17.4	6	524	17.4	524	17.4	524	17.4
654.roms_s	6	920	17.1	926	17.0	933	16.9	6	920	17.1	926	17.0	933	16.9

SPECSpeed®2017_fp_base = **33.2**

SPECSpeed®2017_fp_peak = **33.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.0-ic19.0u5-2/lib/intel64"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(4.00 GHz, Intel Xeon E-2286G)

SPECspeed®2017_fp_base = 33.2

SPECspeed®2017_fp_peak = 33.7

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2020
Hardware Availability: Mar-2020
Software Availability: Sep-2019

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance
Hyper-Threading set to Disable

sysinfo program /home/cpu2017-1.1.0-ic19.0u5-2/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-jecn Thu Feb 14 22:22:00 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) E-2286G CPU @ 4.00GHz
 1 "physical id"s (chips)
 6 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 6
  siblings     : 6
 physical 0: cores 0 1 2 3 4 5
```

From lscpu:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
Address sizes:   39 bits physical, 48 bits virtual
CPU(s):          6
On-line CPU(s) list: 0-5
Thread(s) per core: 1
Core(s) per socket: 6
Socket(s):       1
NUMA node(s):   1
Vendor ID:       GenuineIntel
CPU family:      6
Model:           158
Model name:      Intel(R) Xeon(R) E-2286G CPU @ 4.00GHz
Stepping:        10
CPU MHz:         4000.000
CPU max MHz:     4900.0000
CPU min MHz:     800.0000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 33.2

ThinkSystem SR250
(4.00 GHz, Intel Xeon E-2286G)

SPECspeed®2017_fp_peak = 33.7

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2020
Hardware Availability: Mar-2020
Software Availability: Sep-2019

Platform Notes (Continued)

```

BogoMIPS:          8016.00
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          256K
L3 cache:          12288K
NUMA node0 CPU(s): 0-5
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
pti ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt
xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window
hwp_epp md_clear flush_l1d

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 128866 MB
node 0 free: 128381 MB
node distances:
node   0
0:    10

```

```

From /proc/meminfo
MemTotal:          131959040 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 15 SP1

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 33.2

ThinkSystem SR250
(4.00 GHz, Intel Xeon E-2286G)

SPECspeed®2017_fp_peak = 33.7

CPU2017 License: 9017

Test Date: May-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

Platform Notes (Continued)

```
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-jecln 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Mitigation: PTE Inversion; VMX: conditional cache flushes, SMT disabled
Microarchitectural Data Sampling:	Mitigation: Clear CPU buffers; SMT disabled
CVE-2017-5754 (Meltdown):	Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Indirect Branch Restricted Speculation, IBPB: conditional, IBRS_FW, RSB filling

```
run-level 3 Feb 14 22:21
```

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.0u5-2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   446G   80G  367G  18% /
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Lenovo  -[ISE115D-2.10]- 04/24/2020
Vendor:    Lenovo
Product:   ThinkSystem SR250  -[7Y51CT00WW]-
Product Family: ThinkSystem
Serial:    1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
4x SK Hynix HMAA4GU7AJR8N-VK 32767 MB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(4.00 GHz, Intel Xeon E-2286G)

SPECspeed®2017_fp_base = 33.2

SPECspeed®2017_fp_peak = 33.7

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2020
Hardware Availability: Mar-2020
Software Availability: Sep-2019

Compiler Version Notes (Continued)

| 644.nab_s(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 33.2

ThinkSystem SR250
(4.00 GHz, Intel Xeon E-2286G)

SPECspeed®2017_fp_peak = 33.7

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2020

Hardware Availability: Mar-2020

Software Availability: Sep-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-m64 -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(4.00 GHz, Intel Xeon E-2286G)

SPECspeed®2017_fp_base = 33.2

SPECspeed®2017_fp_peak = 33.7

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2020

Hardware Availability: Mar-2020

Software Availability: Sep-2019

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: -m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(4.00 GHz, Intel Xeon E-2286G)

SPECspeed®2017_fp_base = 33.2

SPECspeed®2017_fp_peak = 33.7

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2020

Hardware Availability: Mar-2020

Software Availability: Sep-2019

Peak Optimization Flags (Continued)

603.bwaves_s (continued):

```
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
```

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX2 -qopt-prefetch -ipo -O3 -ffinite-math-only  
-no-prec-div -qopt-mem-layout-trans=4  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

```
627.cam4_s: -m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-J.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-J.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-02-14 09:21:59-0500.

Report generated on 2020-06-23 18:13:41 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-23.