



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

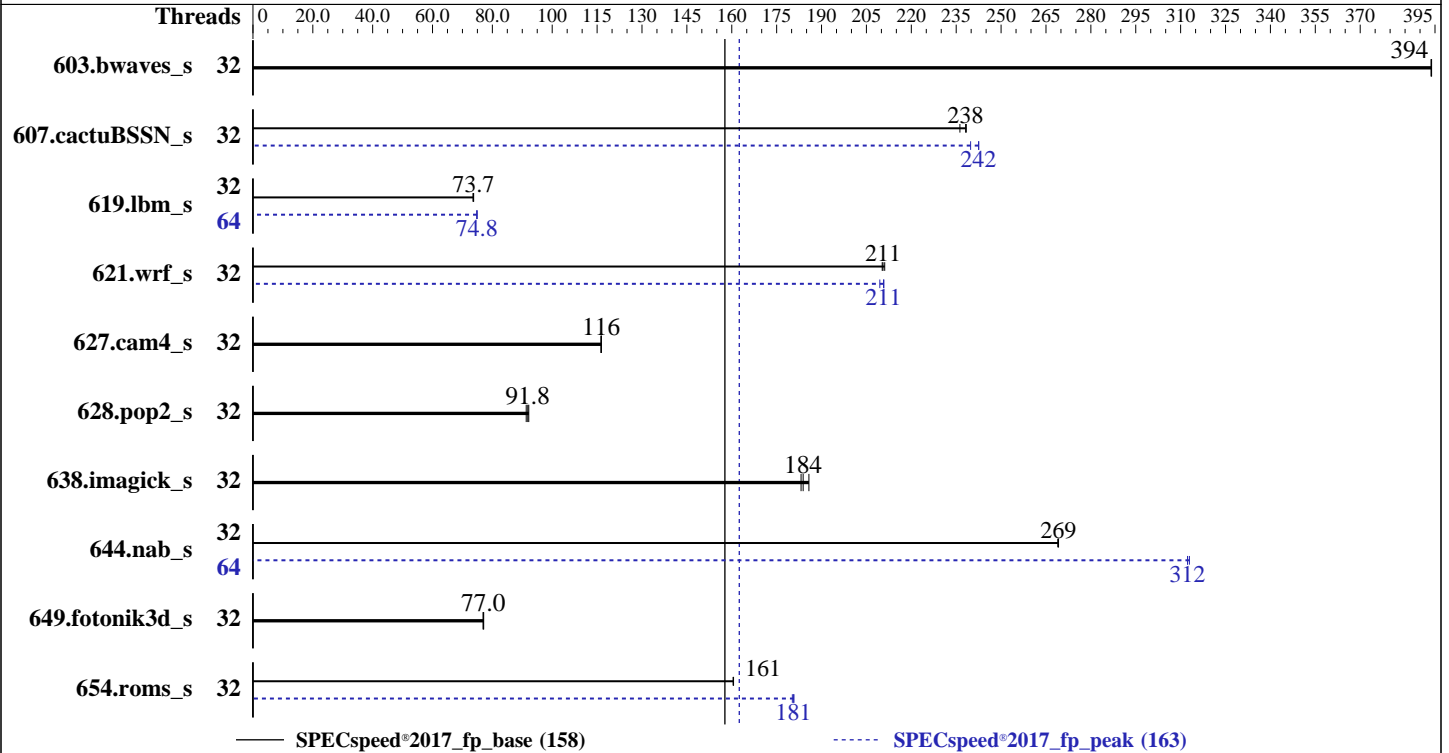

Hardware

CPU Name: AMD EPYC 75F3
 Max MHz: 4000
 Nominal: 2950
 Enabled: 32 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 4 cores
 Other: None
 Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 1 x 800 GB SAS SSD, RAID 0
 Other: None

Software

OS: Ubuntu 20.04.1 LTS (x86_64)
 Kernel 5.4.0-54-generic
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: Yes
 Firmware: HPE BIOS Version A43 v2.42 04/15/2021 released
 Apr-2021
 File System: ext4
 System State: Run level 5 (multi-user, GUI disabled)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECSpeed®2017_fp_base = 158

SPECSpeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	150	394	150	394	150	394	32	150	394	150	394	150	394
607.cactuBSSN_s	32	69.9	238	70.0	238	70.6	236	32	68.7	243	69.5	240	68.7	242
619.lbm_s	32	71.2	73.5	71.1	73.7	71.0	73.7	64	70.0	74.9	70.0	74.8	70.0	74.8
621.wrf_s	32	62.6	211	62.8	211	62.9	210	32	62.8	211	63.1	209	62.7	211
627.cam4_s	32	76.2	116	76.1	116	76.2	116	32	76.2	116	76.1	116	76.2	116
628.pop2_s	32	130	91.3	129	92.2	129	91.8	32	130	91.3	129	92.2	129	91.8
638.imagick_s	32	78.5	184	78.8	183	77.6	186	32	78.5	184	78.8	183	77.6	186
644.nab_s	32	64.9	269	65.0	269	64.9	269	64	55.8	313	55.9	312	55.9	312
649.fotonik3d_s	32	119	76.9	118	77.1	118	77.0	32	119	76.9	118	77.1	118	77.0
654.roms_s	32	98.1	161	98.0	161	98.1	160	32	87.1	181	87.4	180	87.1	181

SPECSpeed®2017_fp_base = **158**

SPECSpeed®2017_fp_peak = **163**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root to enable
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Operating System Notes (Continued)

Transparent Hugepages (THP) for this run.

'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for peak runs of 628.pop2_s and 638.imagick_s to enable THP only on request.

The real test date is Apr-2021. The clock was mistakenly set to 2020 before the benchmark was run.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
  "/cpu2017/amd_speed_aocc300_milan_B_lib/64;/cpu2017/amd_speed_aocc300_mi
  lan_B_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42
  11 43 12 44 13 45 14 46 15 47 16 48 17 49 18 50 19 51 20 52 21 53 22 54
  23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 644.nab_s peak run:

```
GOMP_CPU_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42
  11 43 12 44 13 45 14 46 15 47 16 48 17 49 18 50 19 51 20 52 21 53 22 54
  23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Submitted_by: "Bucek, James" <james.bucek@hpe.com>

Submitted: Wed May 12 19:01:22 EDT 2021

Submission: cpu2017-20210512-26343.sub

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to One memory domain per socket

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Infinity Fabric Power Management set to Disabled

Infinity Fabric Performance State set to P0

Power Regulator set to OS Control Mode

Sysinfo program /cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on dl325gen10plus Thu May 6 17:41:21 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 75F3 32-Core Processor

1 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

From `lscpu` from `util-linux 2.34`:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                64
On-line CPU(s) list:  0-63
Thread(s) per core:    2
Core(s) per socket:   32
Socket(s):             1
NUMA node(s):         8
Vendor ID:             AuthenticAMD
CPU family:            25
Model:                 1
Model name:            AMD EPYC 75F3 32-Core Processor
Stepping:              1
Frequency boost:       enabled
CPU MHz:               3213.297
CPU max MHz:           2950.0000
CPU min MHz:           1500.0000
BogoMIPS:              5889.24
Virtualization:       AMD-V
L1d cache:             1 MiB
L1i cache:             1 MiB
L2 cache:              16 MiB
L3 cache:              256 MiB
NUMA node0 CPU(s):    0-3,32-35
NUMA node1 CPU(s):    4-7,36-39
NUMA node2 CPU(s):    8-11,40-43
NUMA node3 CPU(s):    12-15,44-47
NUMA node4 CPU(s):    16-19,48-51
NUMA node5 CPU(s):    20-23,52-55
NUMA node6 CPU(s):    24-27,56-59
NUMA node7 CPU(s):    28-31,60-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpelgb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	1M	8	Data	1
L1i	32K	1M	8	Instruction	1
L2	512K	16M	8	Unified	2
L3	32M	256M	16	Unified	3

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 128775 MB
node 0 free: 128247 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 129022 MB
node 1 free: 128872 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 129022 MB
node 2 free: 128867 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 129022 MB
node 3 free: 128762 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 129022 MB
node 4 free: 128833 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 129022 MB
node 5 free: 128884 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 129022 MB
node 6 free: 128882 MB
node 7 cpus: 28 29 30 31 60 61 62 63

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```
node 7 size: 116884 MB
node 7 free: 116771 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10  11  11  11  11  11  11  11
 1:  11  10  11  11  11  11  11  11
 2:  11  11  10  11  11  11  11  11
 3:  11  11  11  10  11  11  11  11
 4:  11  11  11  11  10  11  11  11
 5:  11  11  11  11  11  10  11  11
 6:  11  11  11  11  11  11  10  11
 7:  11  11  11  11  11  11  11  10
```

From /proc/meminfo

```
MemTotal:      1044267296 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

```
/usr/bin/lsb_release -d
Ubuntu 20.04.1 LTS
```

From /etc/*release* /etc/*version*

```
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.1 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.1 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

uname -a:

```
Linux dl325gen10plus 5.4.0-54-generic #60-Ubuntu SMP Fri Nov 6 10:37:59 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit):      Not affected
CVE-2018-3620 (L1 Terminal Fault):   Not affected
Microarchitectural Data Sampling:   Not affected
CVE-2017-5754 (Meltdown):           Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): Bypass disabled via prctl and seccomp
Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Apr 1 12:23

SPEC is set to: /cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb2	ext4	733G	27G	669G	4%	/

From /sys/devices/virtual/dmi/id

Vendor: HPE
Product: ProLiant DL325 Gen10 Plus
Product Family: ProLiant
Serial: CN79290FKQ

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M386AAG40AM3-CWE 128 GB 4 rank 3200
8x UNKNOWN NOT AVAILABLE

BIOS:

BIOS Vendor: HPE
BIOS Version: A43
BIOS Date: 04/15/2021
BIOS Revision: 2.42
Firmware Revision: 2.40

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
-----

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

638.imagick_s: basepeak = yes

```
644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -freemap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

```
654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Peak Optimization Flags (Continued)

654.roms_s (continued):

```
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -O3
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.95 GHz, AMD EPYC 75F3)

SPECspeed®2017_fp_base = 158

SPECspeed®2017_fp_peak = 163

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-05-06 18:41:20-0400.

Report generated on 2021-06-08 19:50:59 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.