



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016


Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

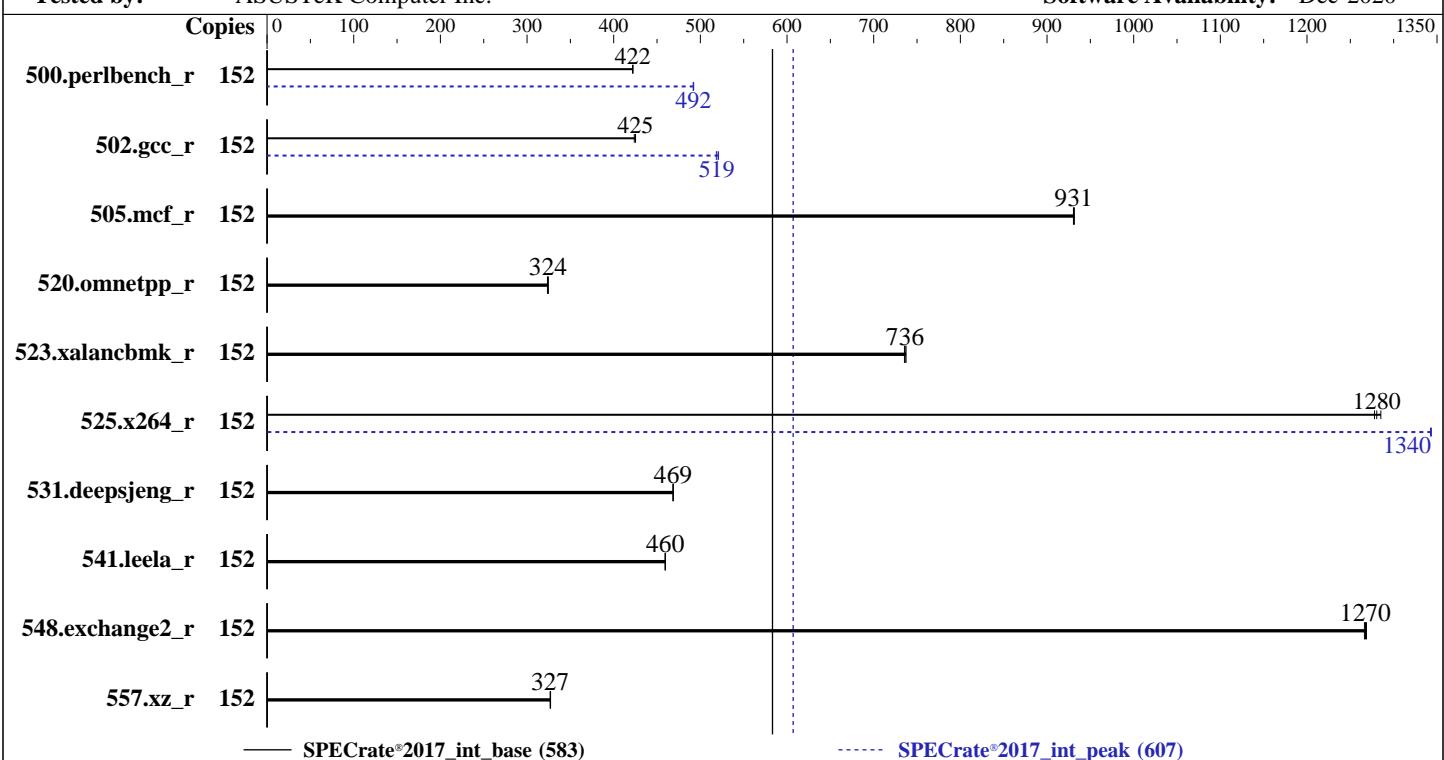

Hardware

CPU Name: Intel Xeon Platinum 8368Q
Max MHz: 3700
Nominal: 2600
Enabled: 76 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 57 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 4 TB PCIE NVME SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel: No
Firmware: Version 0502 released May-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc: jemalloc memory allocator library V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016

Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	152	574	422	573	422	573	422	152	492	492	492	492	492	492	492	492
502.gcc_r	152	508	424	506	425	506	425	152	413	521	415	519	415	518	415	518
505.mcf_r	152	264	931	264	932	264	930	152	264	931	264	932	264	930	264	930
520.omnetpp_r	152	616	324	615	324	615	324	152	616	324	615	324	615	324	615	324
523.xalancbmk_r	152	218	735	218	737	218	736	152	218	735	218	737	218	736	218	736
525.x264_r	152	208	1280	208	1280	207	1290	152	198	1340	198	1340	198	1340	198	1340
531.deepsjeng_r	152	372	469	372	469	372	469	152	372	469	372	469	372	469	372	469
541.leela_r	152	548	459	548	460	548	460	152	548	459	548	460	548	460	548	460
548.exchange2_r	152	314	1270	314	1270	314	1270	152	314	1270	314	1270	314	1270	314	1270
557.xz_r	152	502	327	502	327	502	327	152	502	327	502	327	502	327	502	327

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/cpull8/lib/intel64:/cpull8/lib/ia32:/cpull8/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM

memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016

Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /cpull8/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost.localdomain Mon May 10 18:31:32 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz

2 "physical id"s (chips)

152 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 38

siblings : 76

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

25 26 27 28 29 30 31 32 33 34 35 36 37

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

25 26 27 28 29 30 31 32 33 34 35 36 37

From lscpu from util-linux 2.32.1:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016

Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

Platform Notes (Continued)

CPU(s): 152
On-line CPU(s) list: 0-151
Thread(s) per core: 2
Core(s) per socket: 38
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
Stepping: 6
CPU MHz: 801.751
CPU max MHz: 3700.0000
CPU min MHz: 800.0000
BogoMIPS: 5200.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 58368K
NUMA node0 CPU(s): 0-37,76-113
NUMA node1 CPU(s): 38-75,114-151
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_ll1d arch_capabilities

/proc/cpuinfo cache data
cache size : 58368 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113
node 0 size: 515628 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016

Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

Platform Notes (Continued)

```
node 0 free: 514856 MB
node 1 cpus: 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62
63 64 65 66 67 68 69 70 71 72 73 74 75 114 115 116 117 118 119 120 121 122 123 124 125
126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147
148 149 150 151
node 1 size: 516075 MB
node 1 free: 515242 MB
node distances:
node    0    1
  0:   10   20
  1:   20   10

From /proc/meminfo
  MemTotal:        1056464768 kB
  HugePages_Total:          0
  Hugepagesize:       2048 kB

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
  performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.2 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.2"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:
  Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
  x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):           Not affected
CVE-2018-3620 (L1 Terminal Fault):         Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                 Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016

Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 May 10 18:26

SPEC is set to: /cpul18

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-root	xfs	2.6T	108G	2.5T	5%	/

From /sys/devices/virtual/dmi/id

Vendor:	ASUSTeK COMPUTER INC.
Product:	RS700-E10-RS12U
Product Family:	Server

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x NO DIMM NO DIMM
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	0502
BIOS Date:	05/07/2021
BIOS Revision:	5.2

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 500.perlbench_r(peak)
-----
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016

Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

Compiler Version Notes (Continued)

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016

Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016

Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016

Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)

-xCORE-AVX512 -ipo -O3 -no-prec-div

-fno-strict-overflow

-mbranches-within-32B-boundaries

-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin

-lqkmalloc

502.gcc_r: -m32

-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin

-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)

-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto

-Ofast(pass 1) -O3 -ffast-math -fopt-mem-layout-trans=4

-mbranches-within-32B-boundaries

-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E10(Z12PP-D32) Server System
(2.60 GHz, Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 583

SPECrate®2017_int_peak = 607

CPU2017 License: 9016

Test Date: May-2021

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2021

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -floop-parallelize-all -O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias -mbranches-within-32B-boundaries -L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin -lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.1.html>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z12-V1.1.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-05-10 06:31:32-0400.

Report generated on 2021-06-08 19:51:00 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.