



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECrate®2017\_int\_base = 53.0

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Sep-2021

Hardware Availability: Nov-2021

Software Availability: Jun-2021

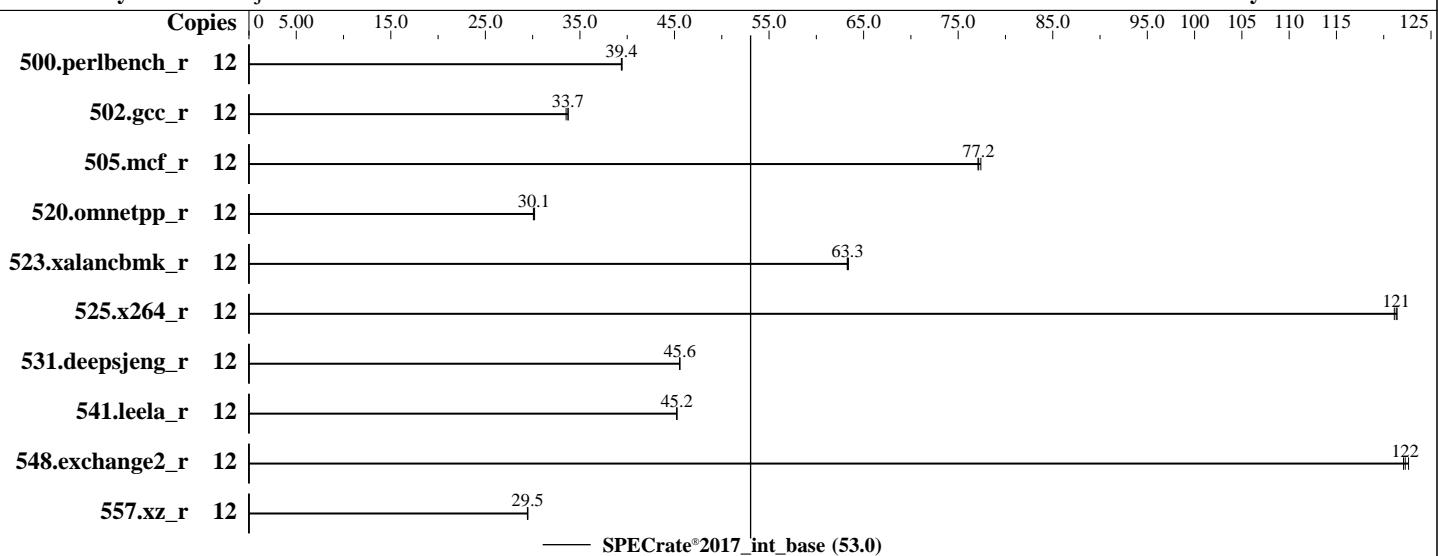

### Hardware

CPU Name: Intel Xeon E-2356G  
Max MHz: 5000  
Nominal: 3200  
Enabled: 6 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 12 MB I+D on chip per chip  
Other: None  
Memory: 32 GB (2 x 16 GB 2Rx8 PC4-3200AA-E)  
Storage: 1 x SATA M.2 SSD, 480GB  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP3 5.3.18-57-default  
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
Parallel: No  
Firmware: Fujitsu BIOS Version V5.0.0.22 R1.7.0 for D3930-A1x. Released Nov-2021 tested as V5.0.0.22 R1.4.0 for D3930-A1x Sep-2021  
File System: xfs  
System State: Run level 5 (graphical)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECrate®2017\_int\_base = 53.0

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Sep-2021

Test Sponsor: Fujitsu

Hardware Availability: Nov-2021

Tested by: Fujitsu

Software Availability: Jun-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	<b>485</b>	<b>39.4</b>	484	39.5	485	39.4							
502.gcc_r	12	503	33.8	<b>504</b>	<b>33.7</b>	507	33.5							
505.mcf_r	12	<b>251</b>	<b>77.2</b>	252	77.1	251	77.4							
520.omnetpp_r	12	521	30.2	523	30.1	<b>522</b>	<b>30.1</b>							
523.xalancbmk_r	12	200	63.4	<b>200</b>	<b>63.3</b>	200	63.3							
525.x264_r	12	173	121	173	121	<b>173</b>	<b>121</b>							
531.deepsjeng_r	12	302	45.5	302	45.6	<b>302</b>	<b>45.6</b>							
541.leela_r	12	439	45.2	439	45.2	<b>439</b>	<b>45.2</b>							
548.exchange2_r	12	<b>257</b>	<b>122</b>	258	122	256	123							
557.xz_r	12	440	29.4	439	29.5	<b>440</b>	<b>29.5</b>							

SPECrate®2017\_int\_base = 53.0

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Kernel Boot Parameter set with : nohz\_full=1-11

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

```
    "/home/PVT/speccpu-1.1.8_ic2021.1_b/lib/intel64:/home/PVT/speccpu-1.1.8_
    ic2021.1_b/lib/ia32:/home/PVT/speccpu-1.1.8_ic2021.1_b/je5.0.1-32"
```

MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECrate®2017\_int\_base = 53.0

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Sep-2021

Test Sponsor: Fujitsu

Hardware Availability: Nov-2021

Tested by: Fujitsu

Software Availability: Jun-2021

## General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Hardware Prefetcher = Disabled

Adjacent Cache Line Prefetch = Disabled

C states = Disabled

Intel Virtualization Technology = Disabled

Sysinfo program /home/PVT/speccpu-1.1.8\_ic2021.1\_b/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d

running on localhost Fri Sep 17 14:23:26 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) E-2356G CPU @ 3.20GHz

1 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

From lscpu from util-linux 2.36.2:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

Address sizes: 39 bits physical, 48 bits virtual

CPU(s): 12

On-line CPU(s) list: 0-11

Thread(s) per core: 2

Core(s) per socket: 6

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

SPECrate®2017\_int\_base = 53.0

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Sep-2021

Test Sponsor: Fujitsu

Hardware Availability: Nov-2021

Tested by: Fujitsu

Software Availability: Jun-2021

## Platform Notes (Continued)

Model:	167
Model name:	Intel(R) Xeon(R) E-2356G CPU @ 3.20GHz
Stepping:	1
CPU MHz:	1100.000
CPU max MHz:	5000.0000
CPU min MHz:	800.0000
BogoMIPS:	6384.00
Virtualization:	VT-x
L1d cache:	288 KiB
L1i cache:	192 KiB
L2 cache:	3 MiB
L3 cache:	12 MiB
NUMA node0 CPU(s):	0-11
Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed adx smap avx512ifma clflushopt intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid fsrm md_clear flush_l1d arch_capabilities

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	512K	3M	8	Unified	2	1024	1	64
L3	12M	12M	16	Unified	3	12288	1	64

/proc/cpuinfo cache data

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECrate®2017\_int\_base = 53.0

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Sep-2021

Test Sponsor: Fujitsu

Hardware Availability: Nov-2021

Tested by: Fujitsu

Software Availability: Jun-2021

## Platform Notes (Continued)

cache size : 12288 kB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11

node 0 size: 31511 MB

node 0 free: 30675 MB

node distances:

node 0

0: 10

From /proc/meminfo

MemTotal: 32267716 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
powersave

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="SLES"

VERSION="15-SP3"

VERSION\_ID="15.3"

PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP3"

ID="sles"

ID\_LIKE="suse"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:15:sp3"

uname -a:

Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021  
(ba3c2e9/1p-5d9e8aa) x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECrate®2017\_int\_base = 53.0

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Sep-2021

Test Sponsor: Fujitsu

Hardware Availability: Nov-2021

Tested by: Fujitsu

Software Availability: Jun-2021

## Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Sep 17 13:12

SPEC is set to: /home/PVT/speccpu-1.1.8\_ic2021.1\_b

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	365G	59G	307G	16%	/home

From /sys/devices/virtual/dmi/id

Vendor:	FUJITSU
Product:	D3930-A1

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Samsung M391A2K43DB1-CWE 16 GB 2 rank 3200

BIOS:

BIOS Vendor:	FUJITSU // American Megatrends Inc.
BIOS Version:	V5.0.0.22 R1.4.0 for D3930-A1x
BIOS Date:	09/03/2021
BIOS Revision:	1.4

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
| 525.x264\_r(base) 557.xz\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECrate®2017\_int\_base = 53.0

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Sep-2021

Hardware Availability: Nov-2021

Software Availability: Jun-2021

## Compiler Version Notes (Continued)

Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECrate®2017\_int\_base = 53.0

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Sep-2021

Hardware Availability: Nov-2021

Software Availability: Jun-2021

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevA.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevA.xml>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-17 01:23:25-0400.

Report generated on 2021-10-12 17:17:41 by CPU2017 PDF formatter v6442.

Originally published on 2021-10-12.